

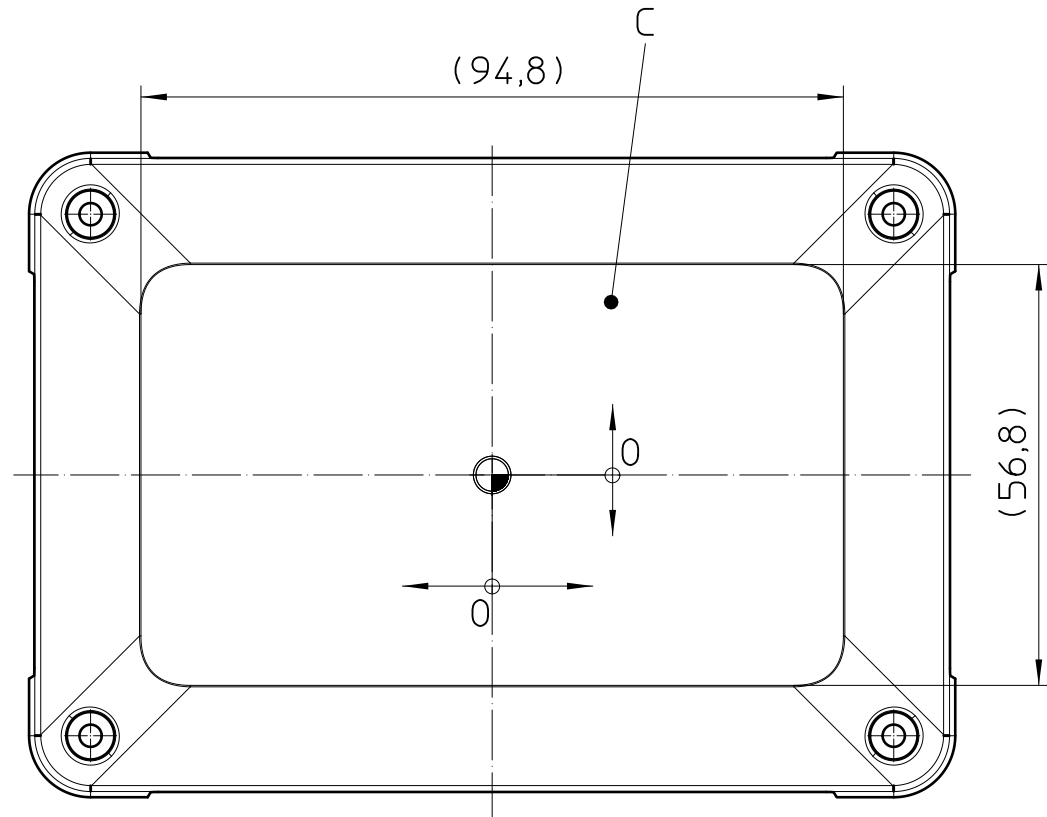
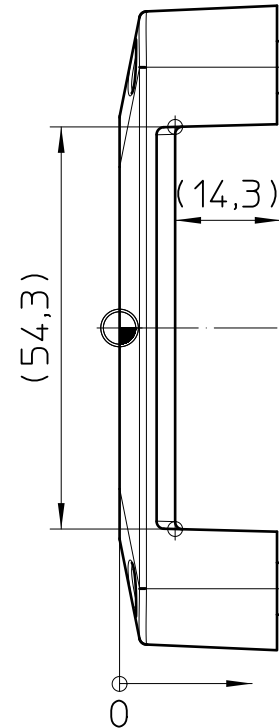


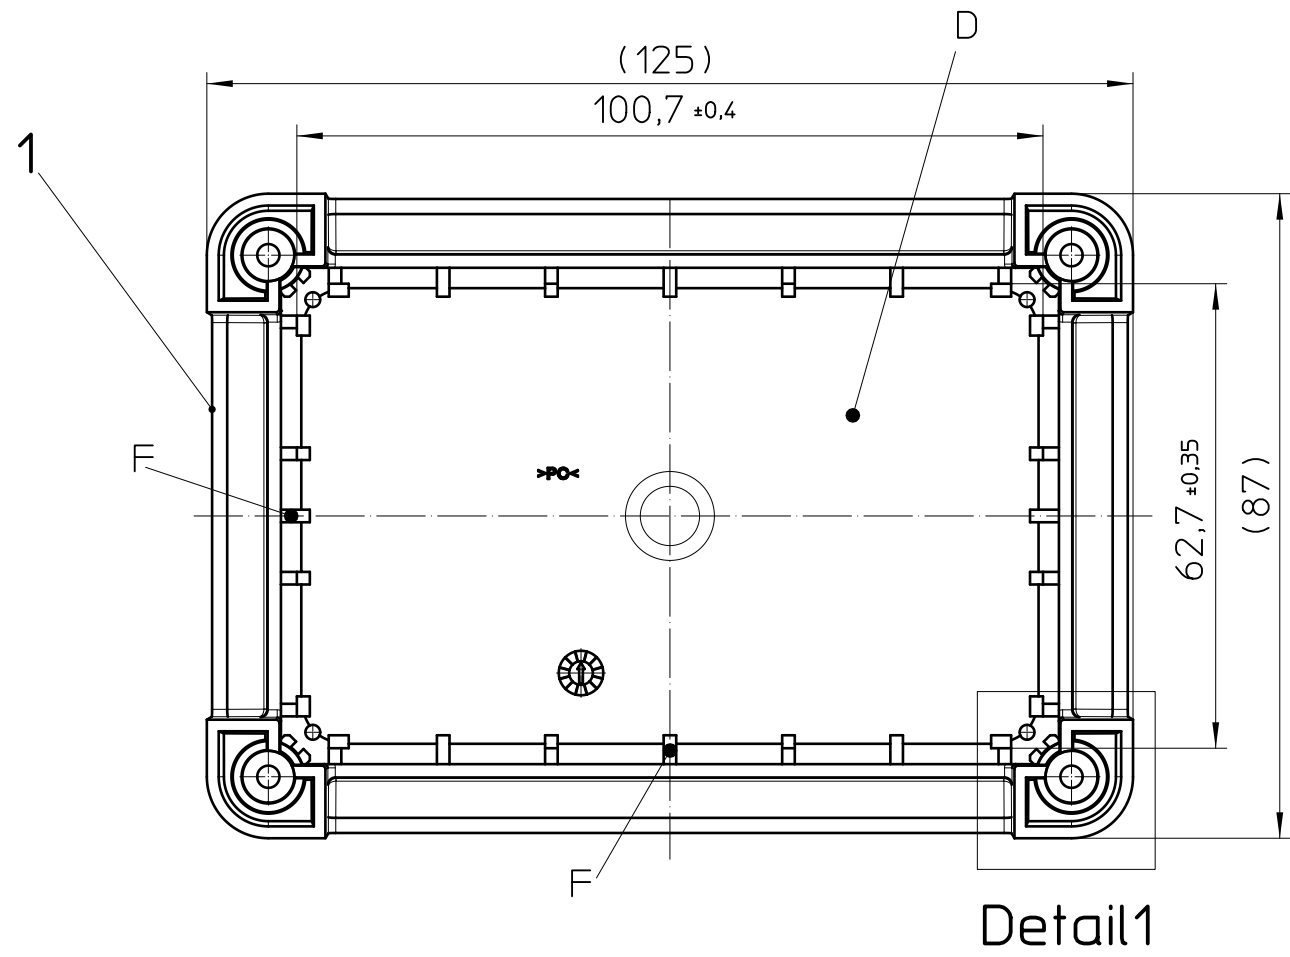

Detail1
2:1

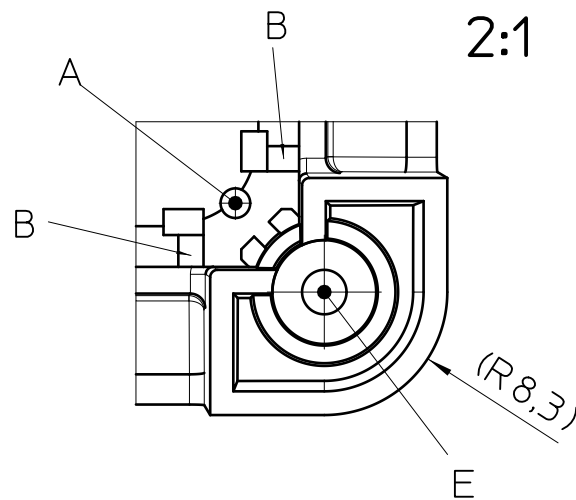

General Information:

- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2,
- Web: www.phoenixcontact.com webcode: #0853

Additional Information:

A. Centering for CORNER CONNECTOR (UCS CCD)

B. Guidance for SIDE WALL (UCS SW...)

C. Marking und machining area

- max. marking area
- printing processes on request.

D. Adhesion surface area for UCS GD surface:

- dry and without grease/dust

E. Hole for screw

F. Centering rib for SIDE WALL (UCS SW...)

☉ = Workpiece zero point for mechanical processing; symmetrical to the centering rib F.

- Tolerances for mechanical processing
 - milled to workpiece zero point ±0,2
 - milled to other reference points ±0,1

Area for max. PCB

UCS HH... + UCS CC+UCS GD= 100mmx62mm

UCS HH... + UCS CCD= 100mmx62mm

Pos.	QTY	description	material
1	1	HALF HOUSING 125-87	PC

	DIN A2		document-no. / article-no. 01014506 / 02 2203349	scale 1:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
	date 21.02.2023		document-type TECDOC 2D_Productdrawing		
	page 1 of 1		description UCS HH 125-87 7035		