


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

- General Information
- Simplified representation
 - Document excluded from change process
 - Linear dimensions [mm]
 - Tolerances apply in a normal climate according to DIN ISO 291-23/50-2
 - Web: www.phoenixcontact.com webcode: #0308
 - General tolerances for PCB: dimensions: $\pm 0,1/R \pm 0,2/\pm 1^\circ$


symmetry: 0,2
 - PCB-thickness: $1,6 \pm 0,2$
 - When using the base strip in housing from Phoenix Contact the PCB outline housing series must be used.
 - Restricted area 
 - Corresponding plug for unit 1: HSCP-SP 1,5-1U...
 - Corresponding plug for unit 2: HSCP-SP 1,5-1U...

Additional information:
A) Contact type

Wiring Diagram		
schematic symbol	description	electrical symbol
	pin contact	
	without pin contact	


B) Mechanical coding not applicable before soldering

Mechanical coding possibilities after soldering

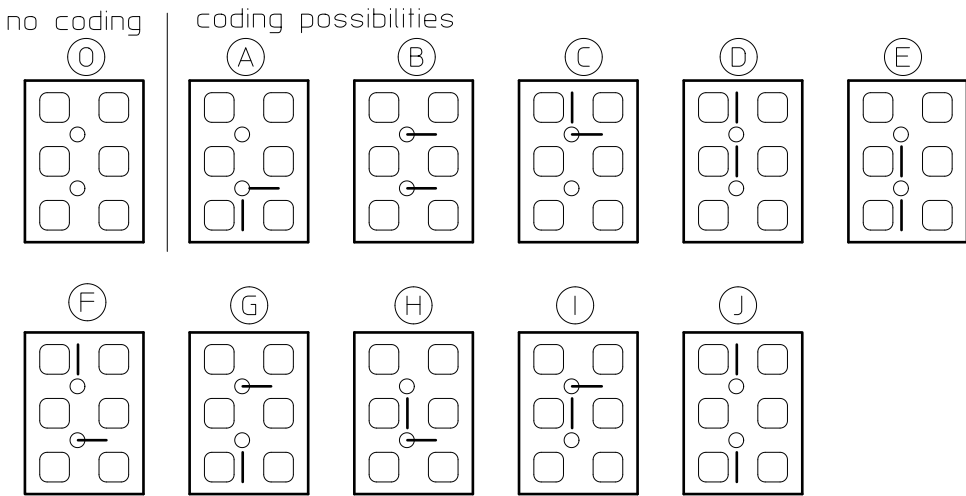

- C) Lock and Release area
- D) Fixation pin for spring
- E) Coding area for CP-DMC 1,5
- F) Suction surface for the vacuum pipette 
- G) Zero point blister tape

Pos.	QTY	description	material
1	1	HOUSING	LCP, BK9005
2	6	PIN CONTACT	Cu, Sn plated
3	6	PIN CONTACT	Cu, Sn plated
 DIN A2		document-No. / RI 00958092 / 04	date 06.05.2025
		ident.-No. 2203409	document-type TECDOC 2D_Productdrawing
page 1 of 1		description HSCH 1,5-2U/12 THR 9005	
		scale 2:1	

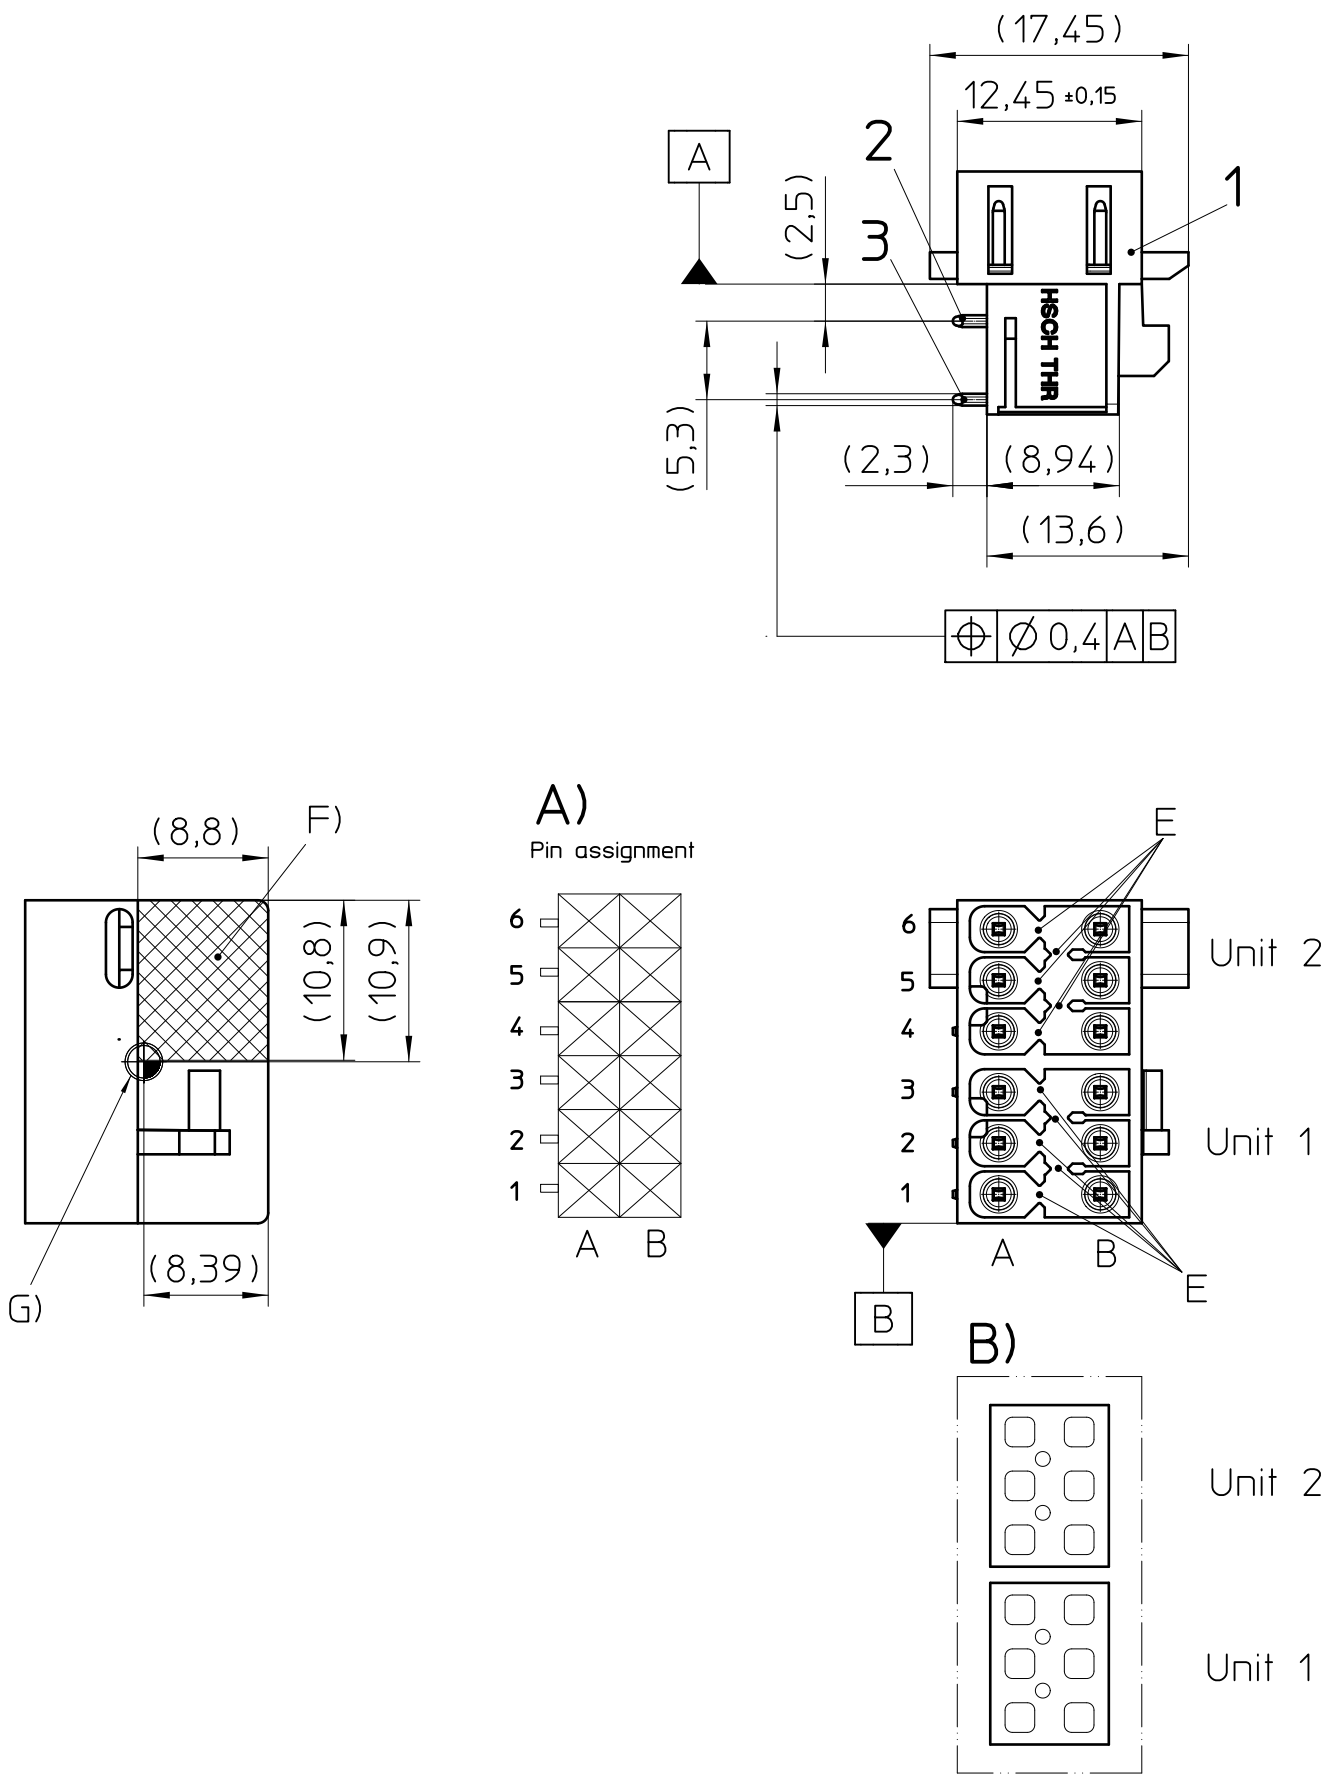

Recommended PCB drilling plan

