

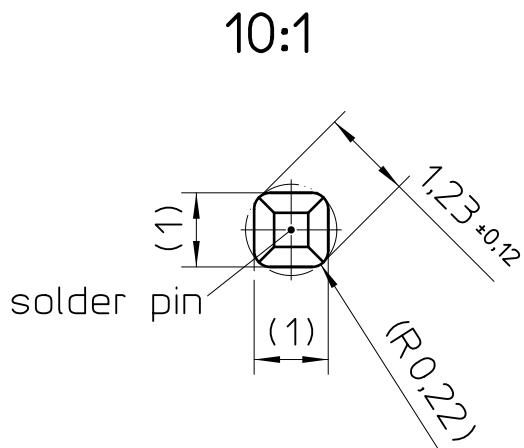
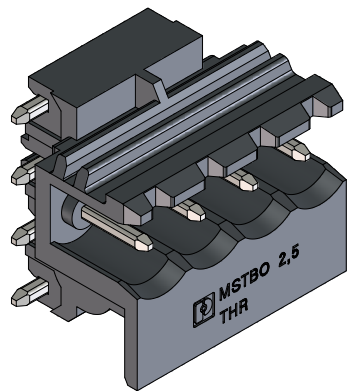
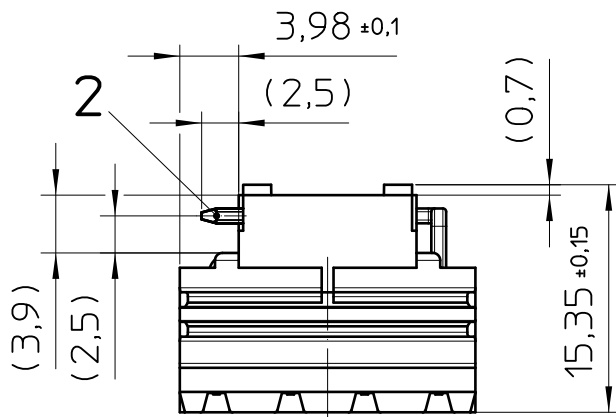
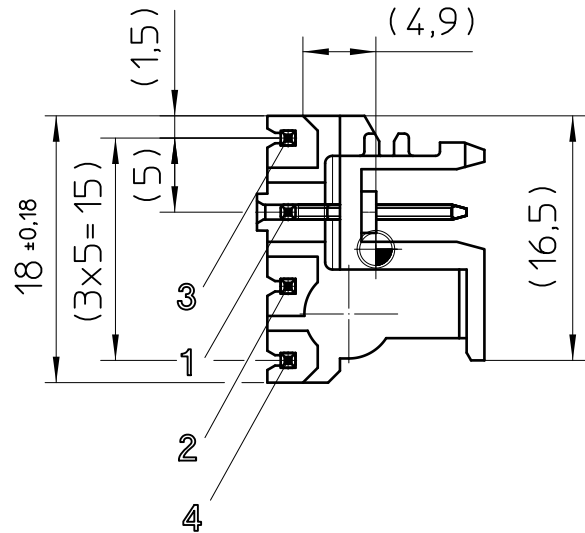
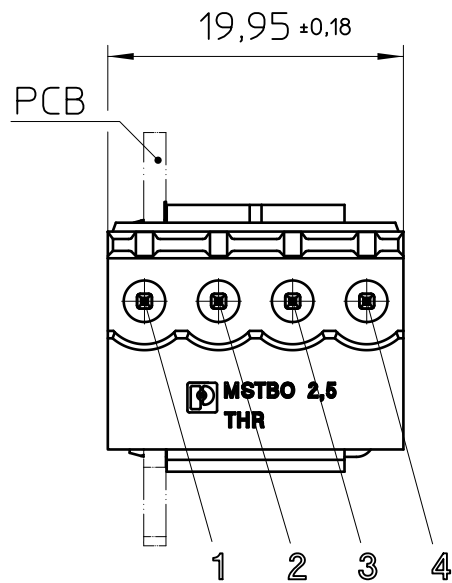


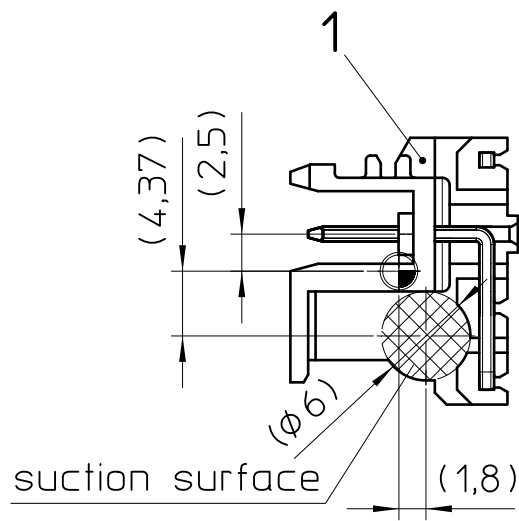

Recommended PCB

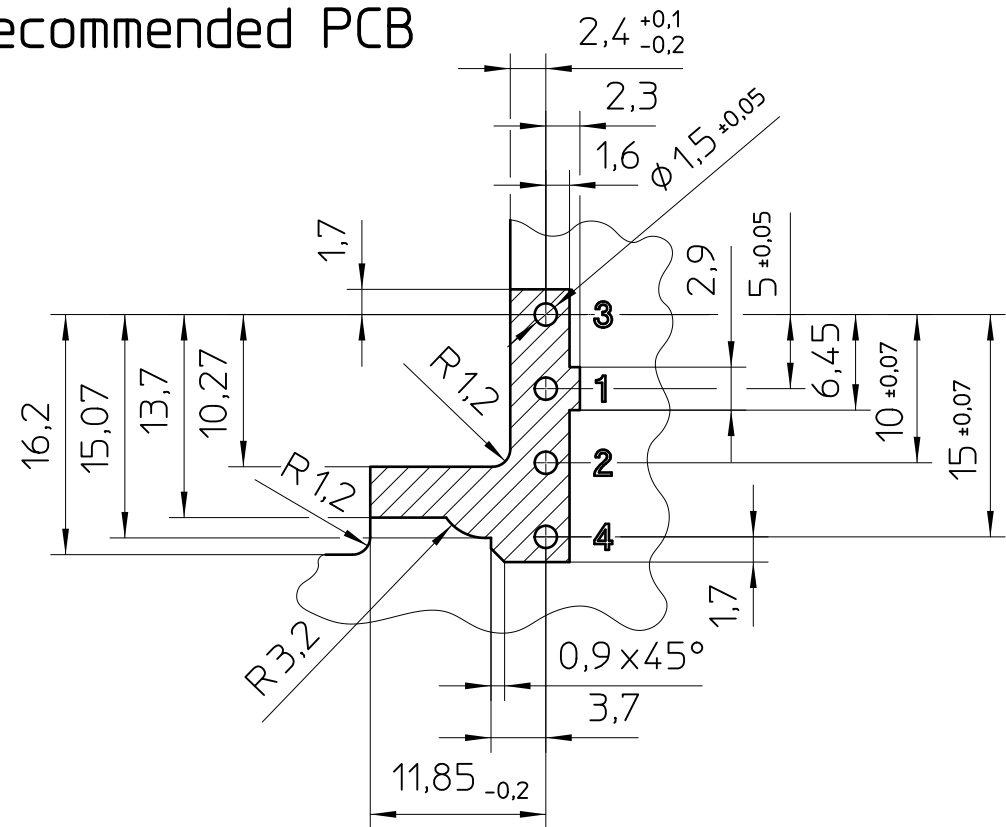

General Information:

- Simplified representation, exemplary shown in black
- Tolerances, apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- When using this connection technology in housing systems from Phoenix Contact see the appropriate documentation.
- Restricted area
- Suction surface
- Zero part
- General tolerances PCB:
dimensions ≤ 30 : $\pm 0,1/R \pm 0,2/\pm 1^\circ$
dimensions > 30 : $\pm 0,15/R \pm 0,2/\pm 1^\circ$
symmetry: 0,2
- Document excluded from change process
- Web: www.phoenixcontact.com

Additional Information

A. PCB $t=1,6 \pm 0,2$

Pos.	QTY	Description	Material
1	1	HOUSING	PA
2	4	SOLDER PIN	Cu alloy

DIN A3	document-no. / ri 00609671 / 05	article-no. 2709749	scale 2:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
	date 09.02.2023	document-type		
page 1 of 1	description MSTBO 2,5/ 4-G1L THR BK			