


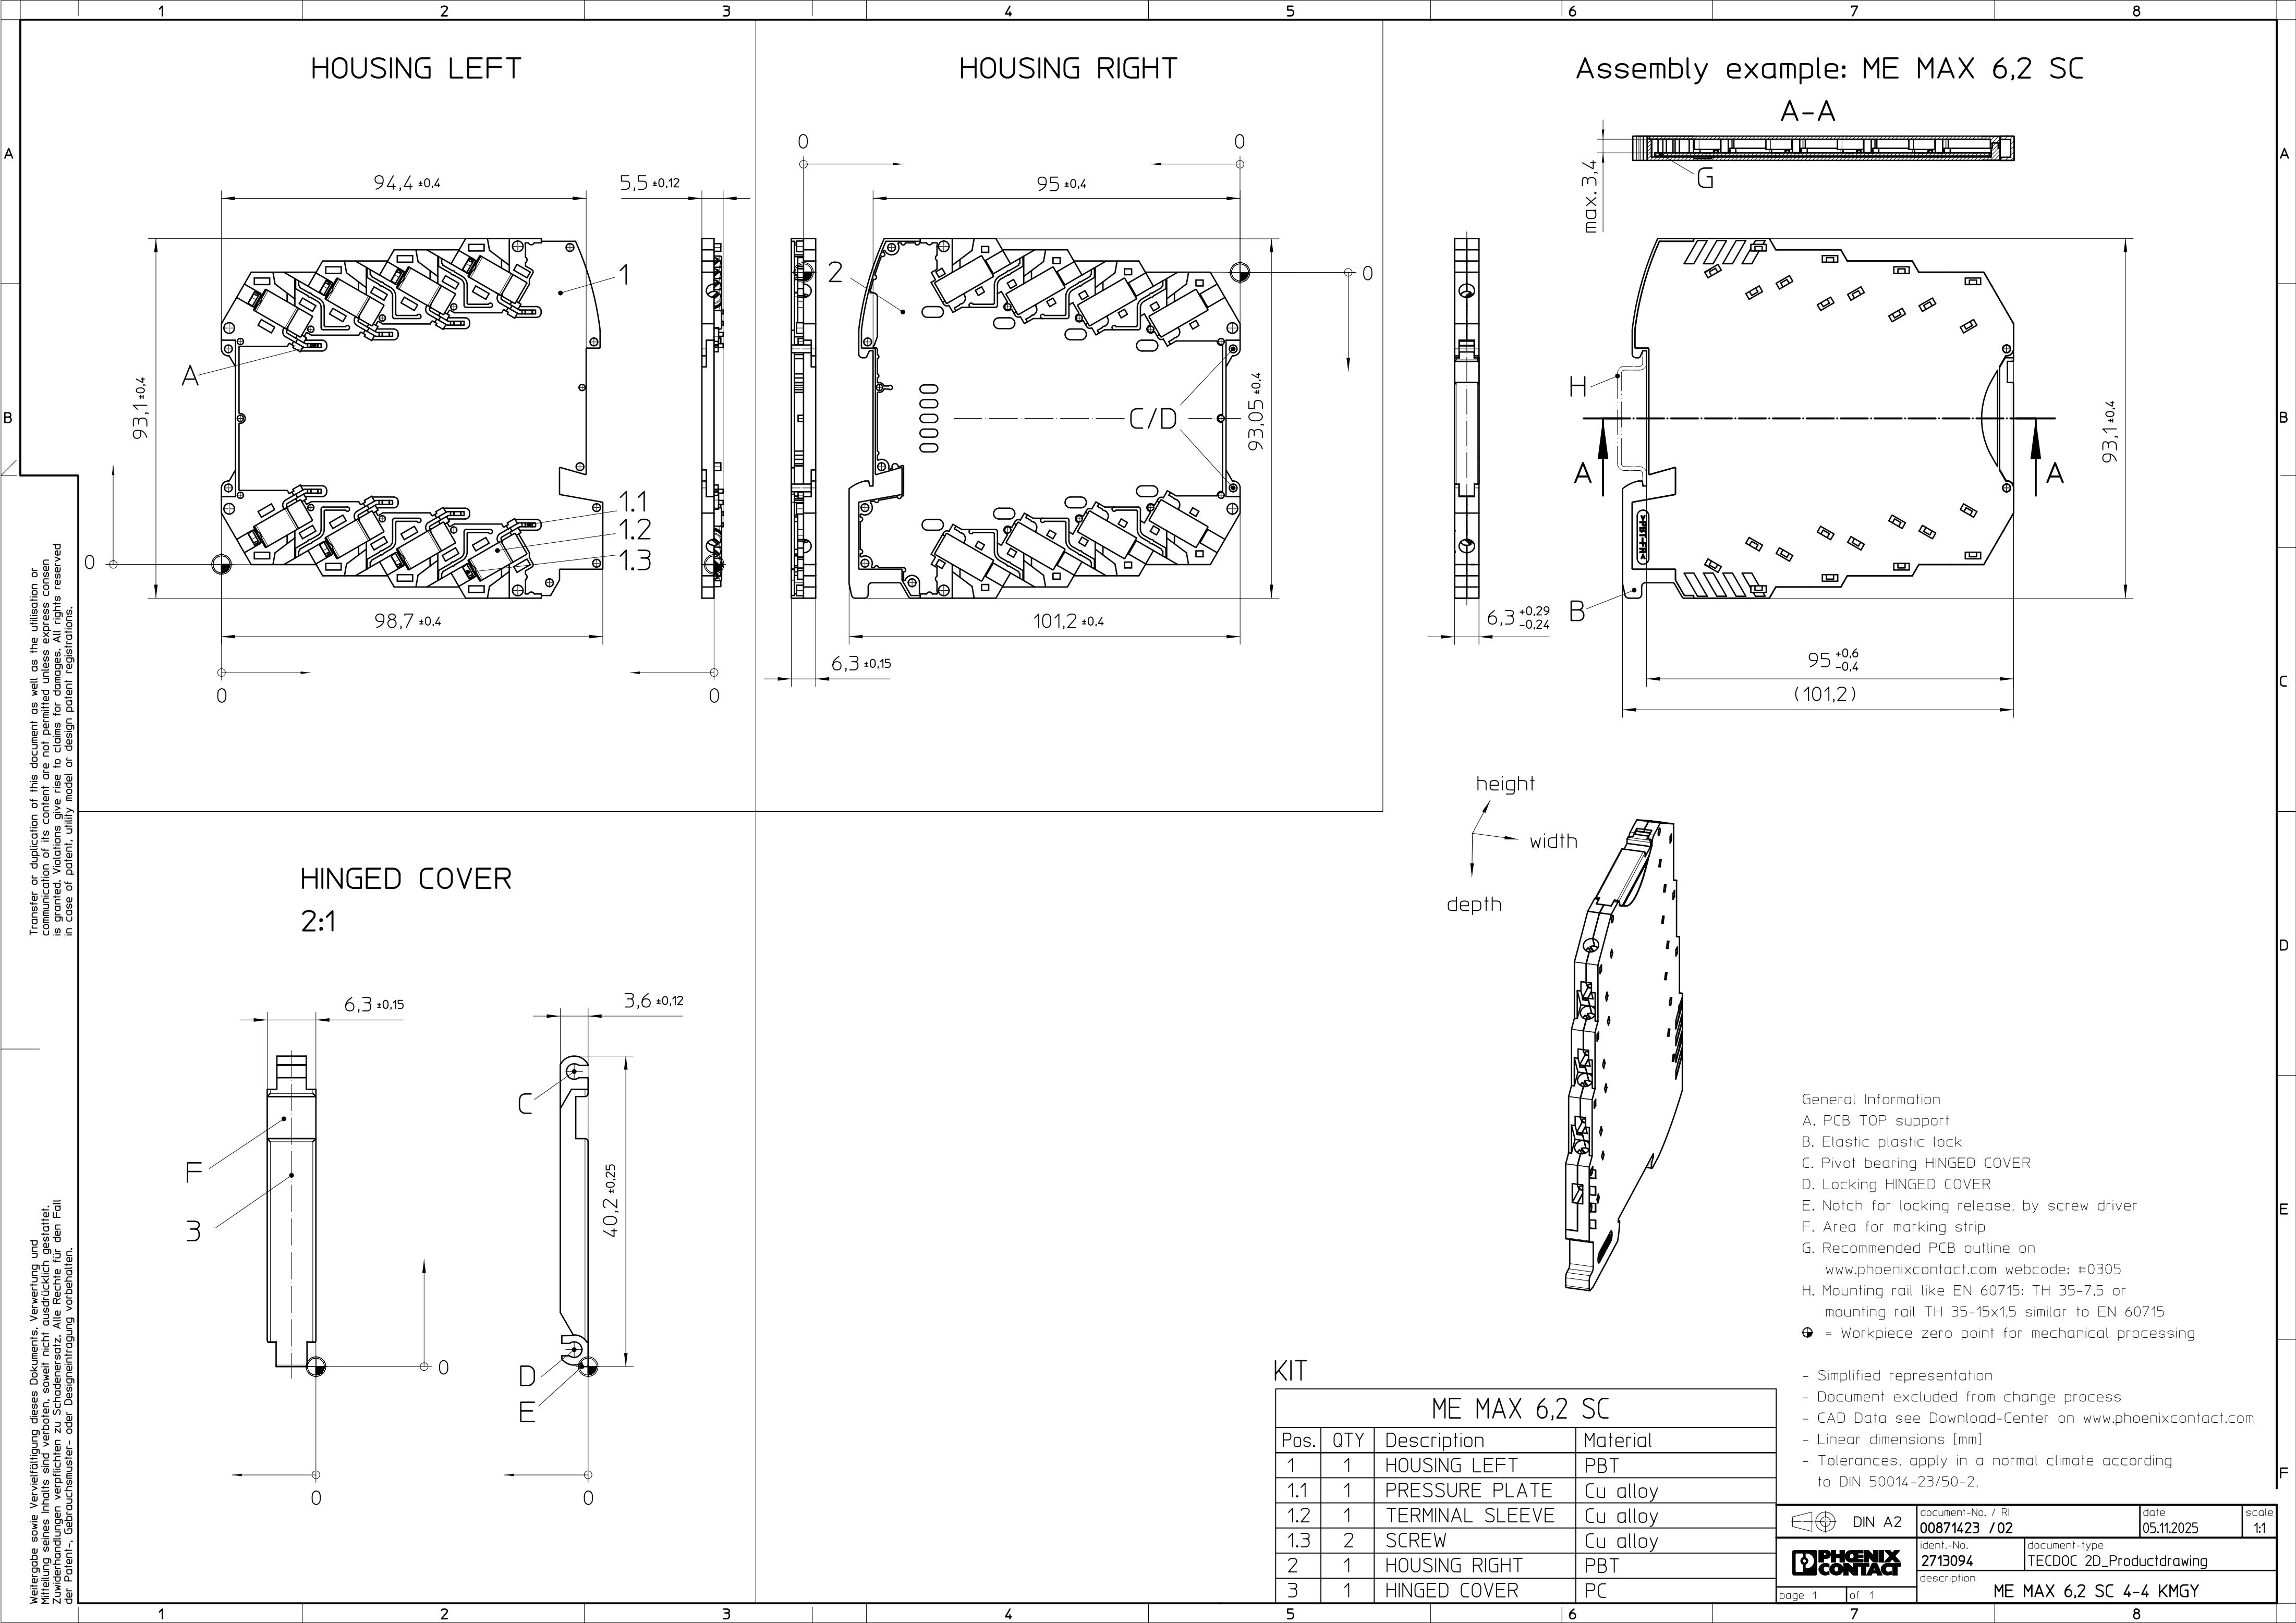

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

- General Information
- A. PCB TOP support
 - B. Elastic plastic lock
 - C. Pivot bearing HINGED COVER
 - D. Locking HINGED COVER
 - E. Notch for locking release, by screw driver
 - F. Area for marking strip
 - G. Recommended PCB outline on www.phoenixcontact.com webcode: #0305
 - H. Mounting rail like EN 60715: TH 35-7,5 or mounting rail TH 35-15x1,5 similar to EN 60715
- ☉ = Workpiece zero point for mechanical processing

- Simplified representation
- Document excluded from change process
- CAD Data see Download-Center on www.phoenixcontact.com
- Linear dimensions [mm]
- Tolerances, apply in a normal climate according to DIN 50014-23/50-2,

KIT			
ME MAX 6,2 SC			
Pos.	QTY	Description	Material
1	1	HOUSING LEFT	PBT
1.1	1	PRESSURE PLATE	Cu alloy
1.2	1	TERMINAL SLEEVE	Cu alloy
1.3	2	SCREW	Cu alloy
2	1	HOUSING RIGHT	PBT
3	1	HINGED COVER	PC

 DIN A2	document-No. / RI 00871423 / 02		date 05.11.2025	scale 1:1
	ident.-No. 2713094	document-type TECDOC 2D_Productdrawing		
 PHOENIX CONTACT	description ME MAX 6,2 SC 4-4 KMGY			
	page 1 of 1			