

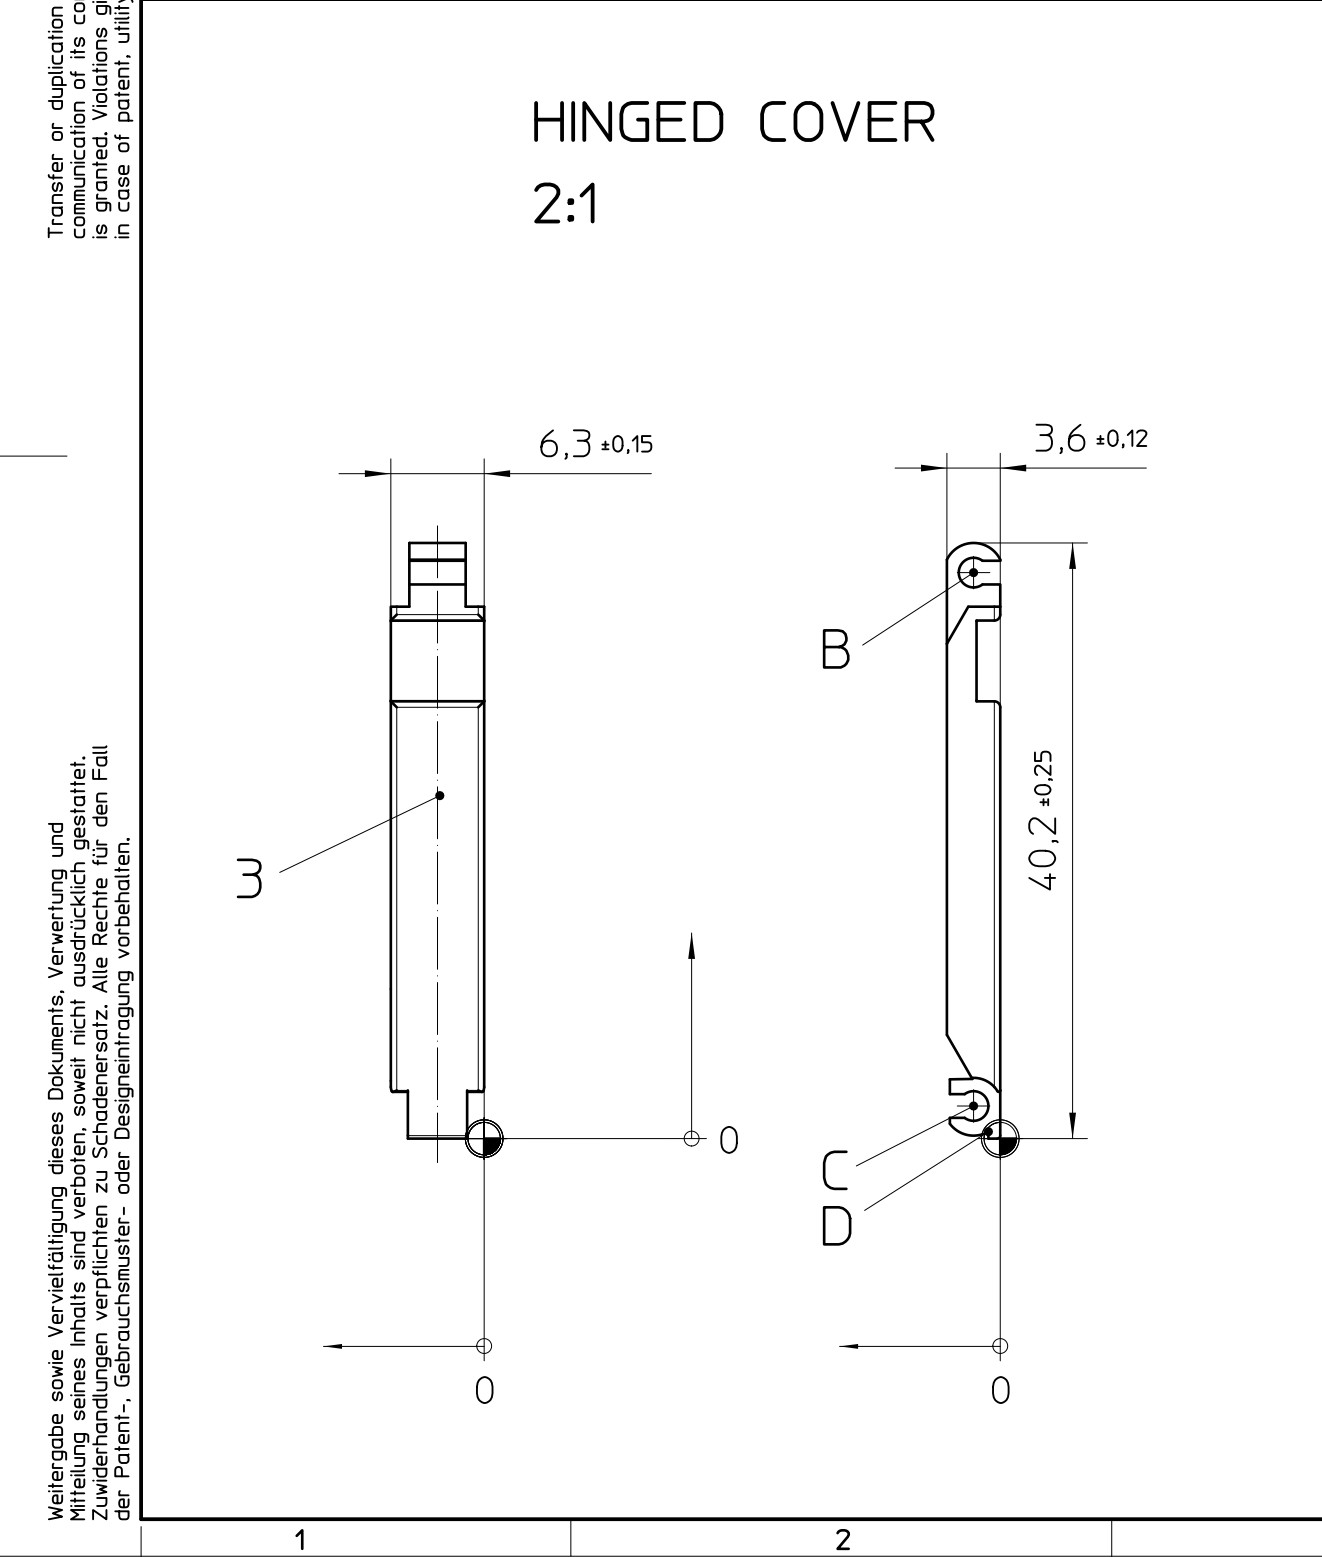
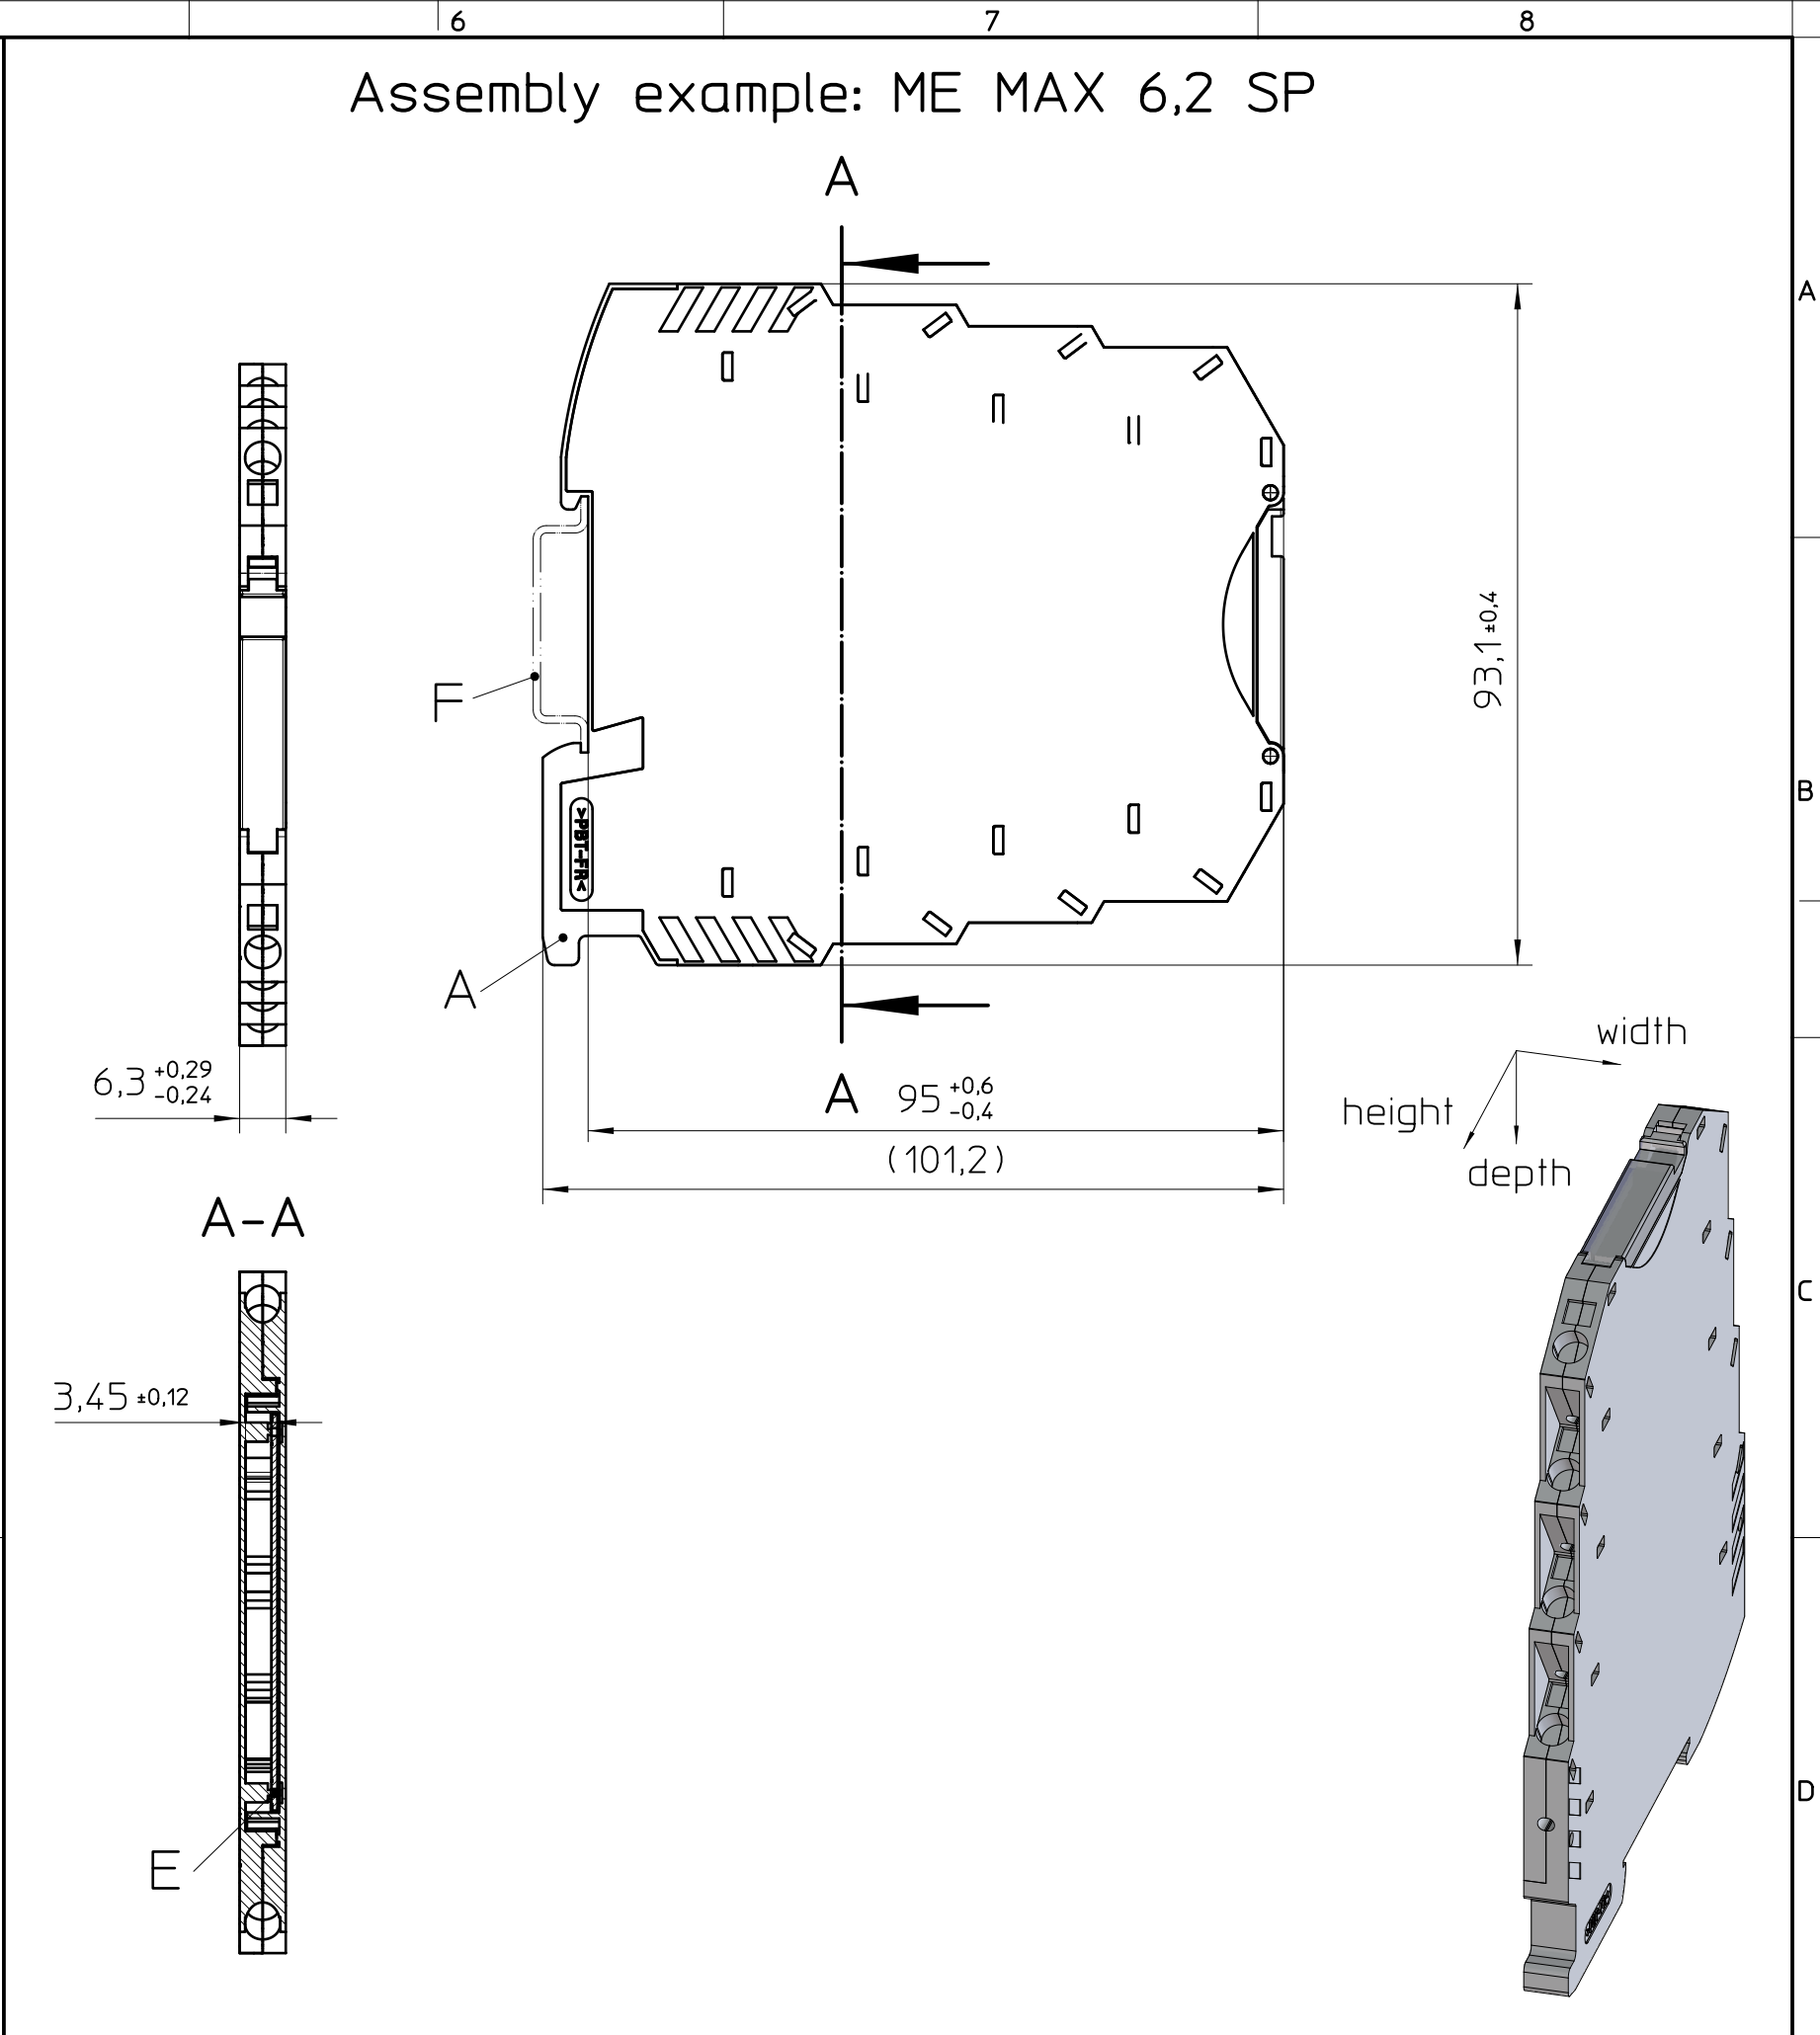
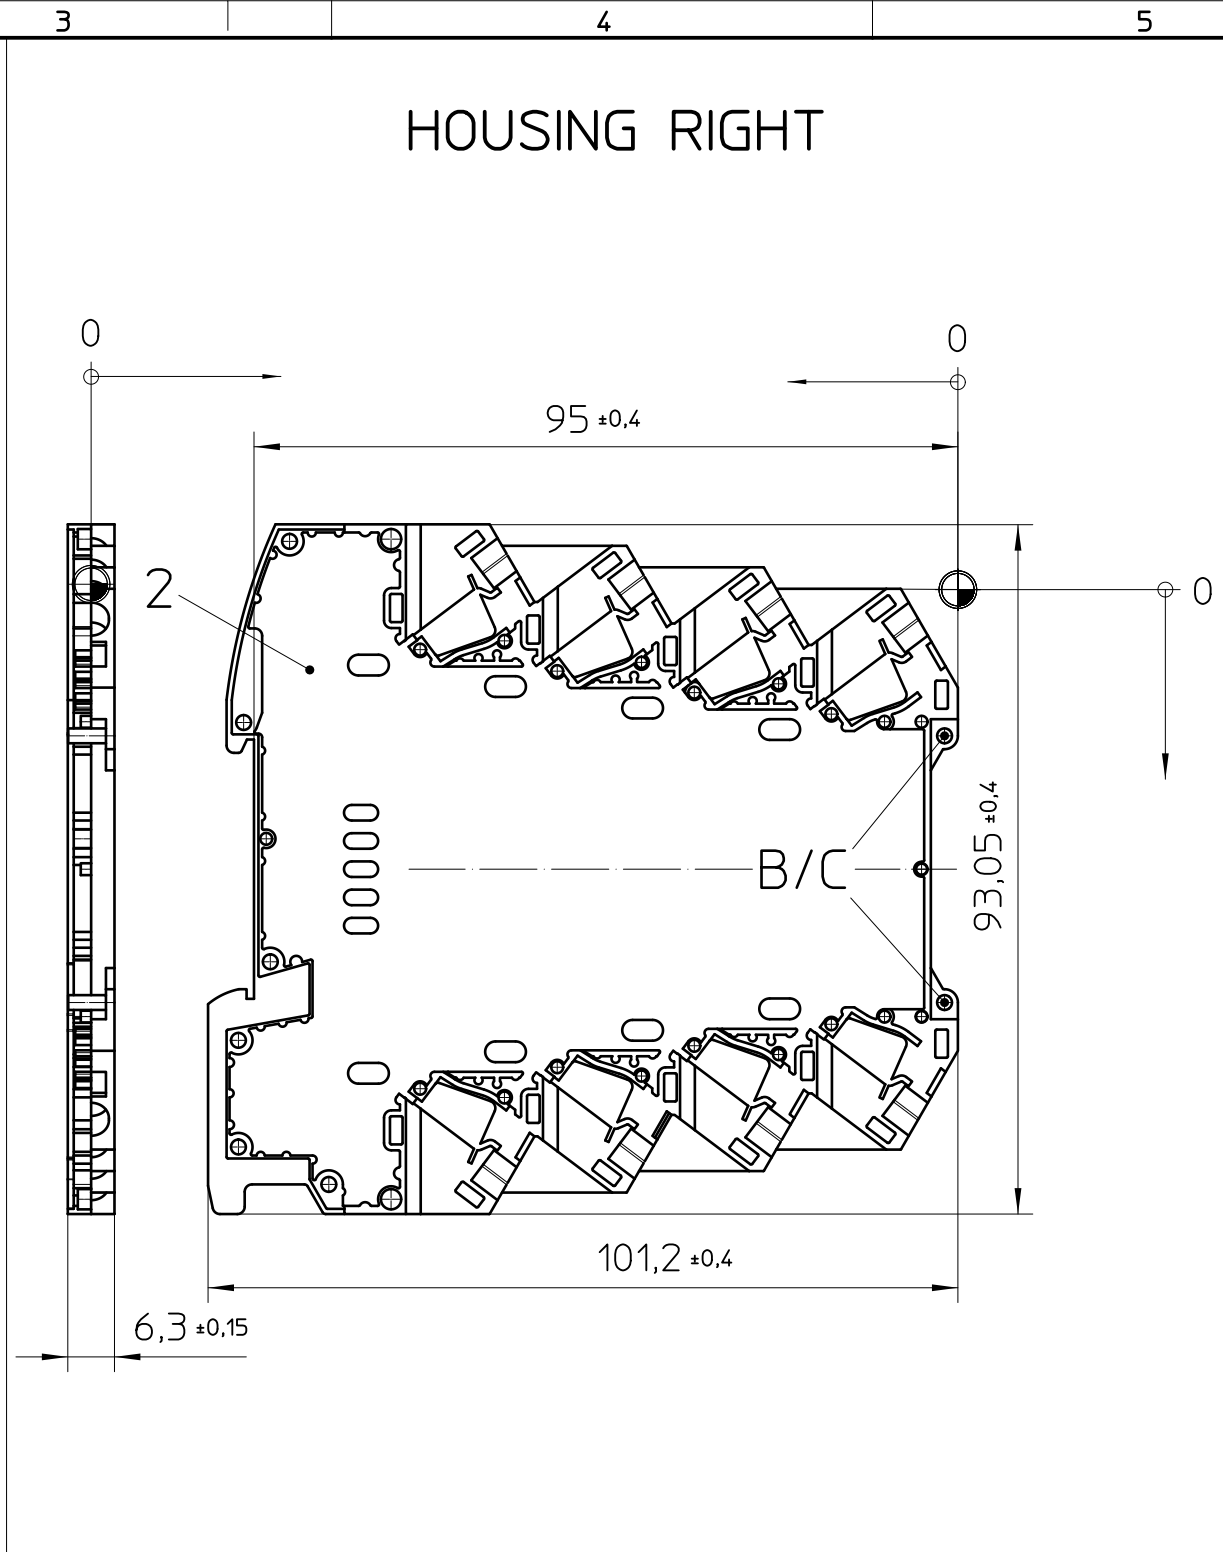


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

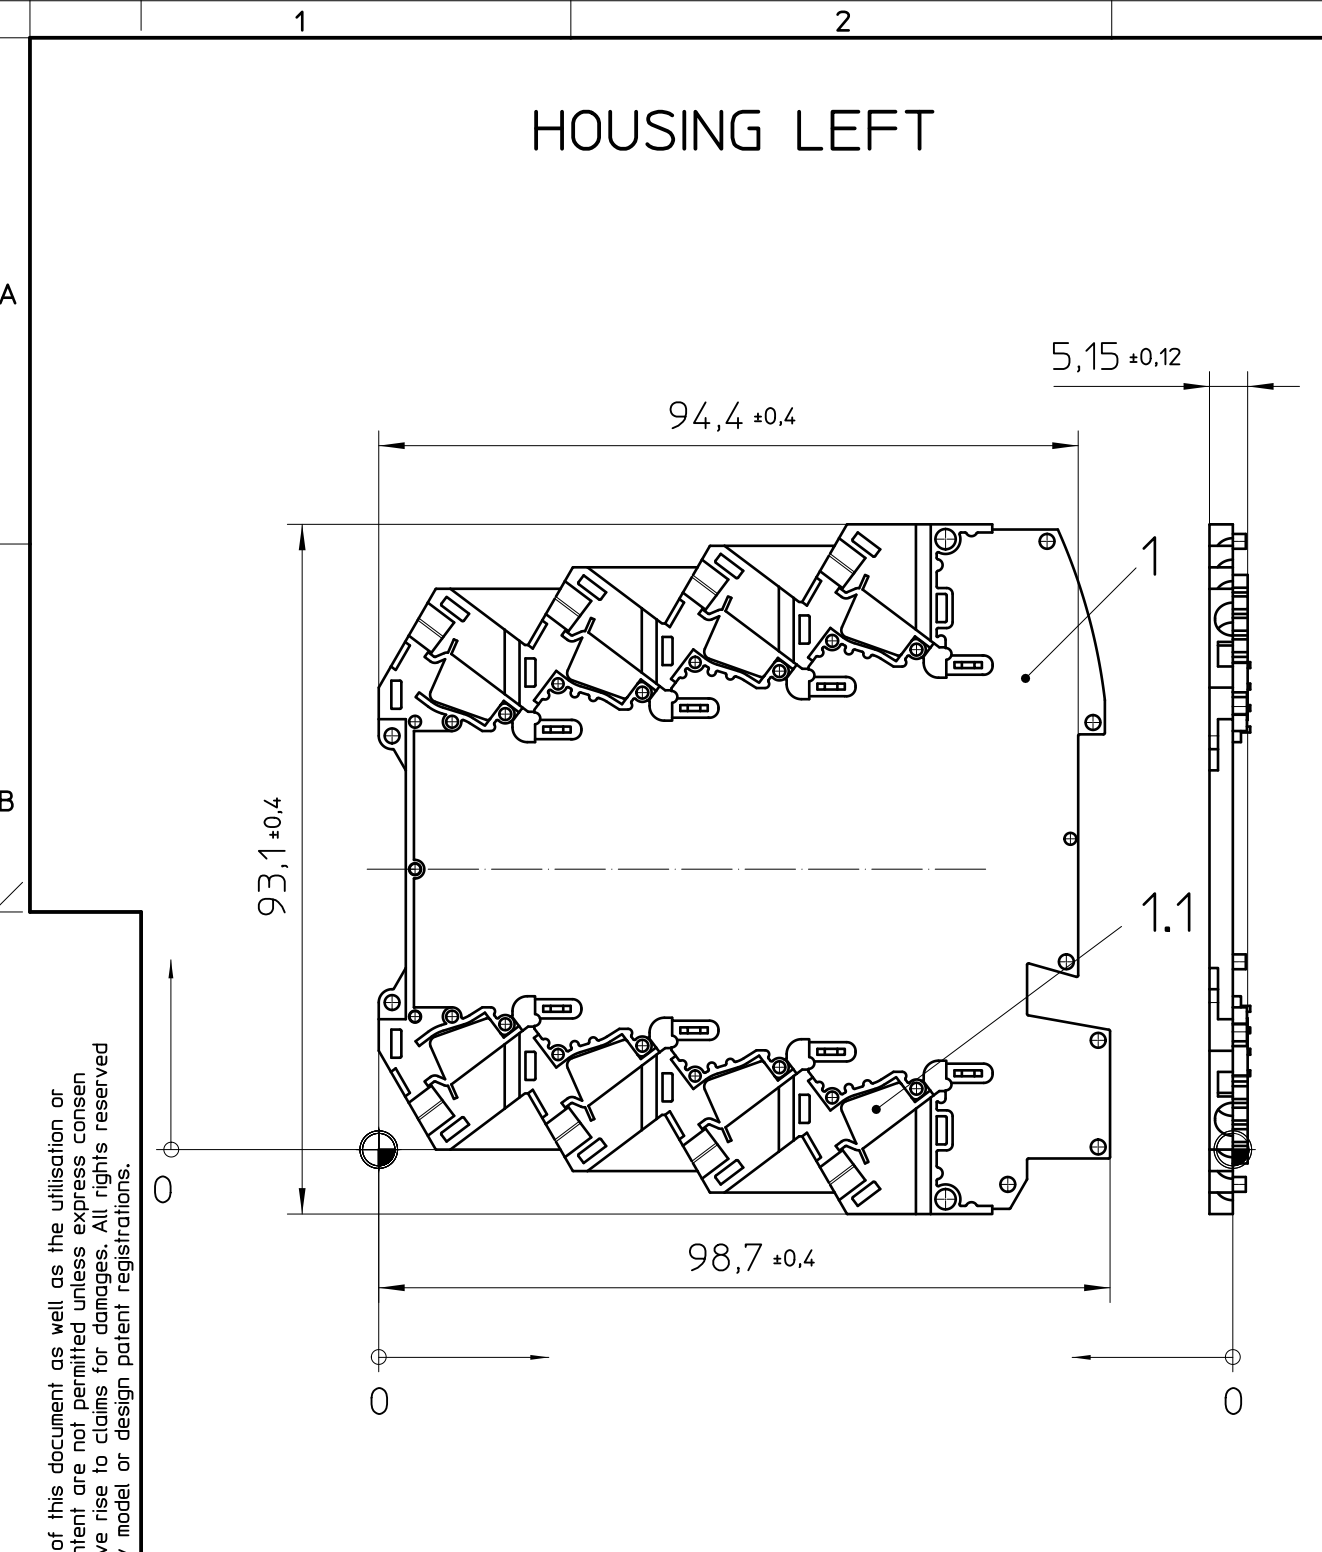

General Information:

- Simplified representation, exemplary shown in gray.
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Workpiece zero point for mechanical processing
- Tolerances for mechanical processing are ISO 2768-mk
- Tolerances for printing DIN ISO 2768-m
- Machining radii min. R1, further on request
- Web: www.phoenixcontact.com webcode: #0903

Additional Information:

- A) Elastic plastic lock
- B) Pivot bearing HINGED COVER
- C) Locking HINGED COVER
- D) Notch for locking release, by screw driver
- E) Recommended PCB outline on www.phoenixcontact.com webcode: #0512
- F) Mounting rail like EN 60715, TH 35-7,5 or mounting rail similar to EN 60715, TH 35-15x1,5

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	HOUSING LEFT	PBT
1.1	8	SPRING CONTACT	Cu, Sn plated + STL
2	1	HOUSING RIGHT	PBT
3	1	HINGED COVER	PC

	DIN A2	document-No. / RI 00871534 / 02	date 05.11.2025	scale 1:1
	ident.-No. 2713104	document-type TECDOC 2D_Productdrawing		
page 1	of 1	description ME MAX 6,2 SP 4-4 KMGY		