


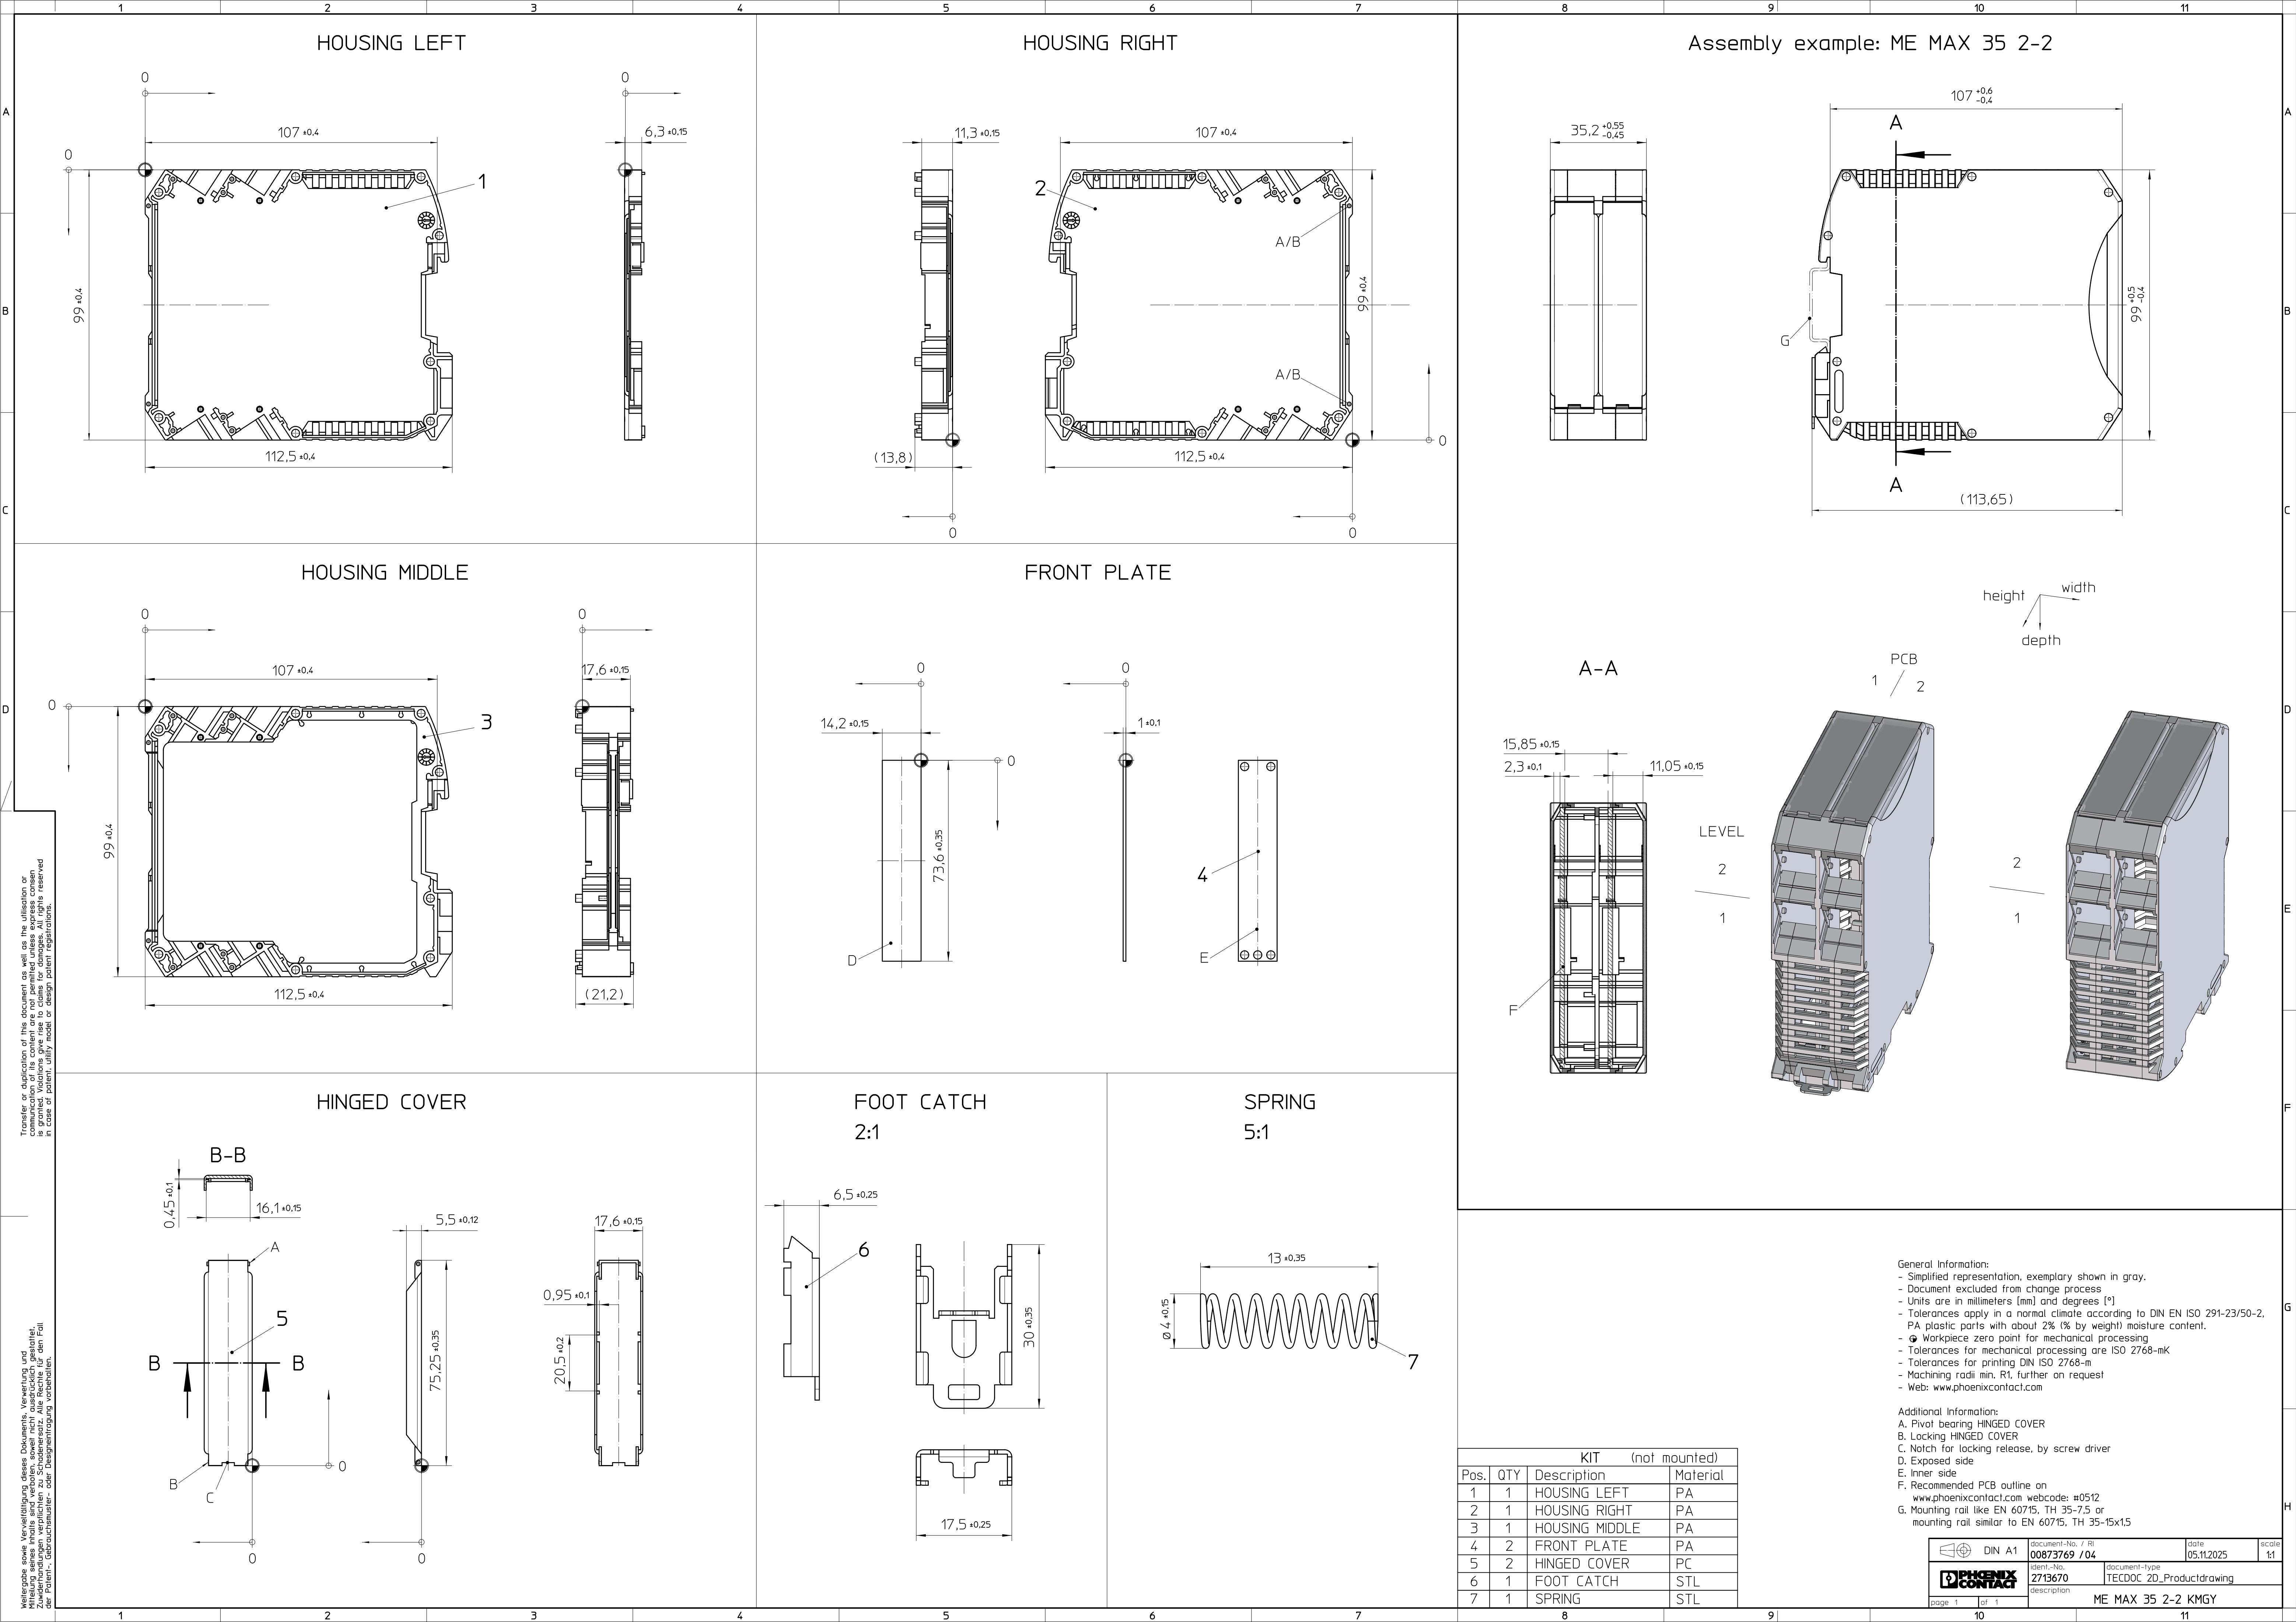

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is obtained from Phoenix Contact. All rights reserved. In case of patent, utility model or design patent registrations, the holder's name is reserved.

Weitergabe sowie Vervielfältigung dieses Dokuments, sowie die Nutzung oder Kommunikation seines Inhalts sind ohne schriftliche Genehmigung von Phoenix Contact. Alle Rechte vorbehalten. Im Falle von Patent-, Gebrauchsmuster- oder Designpatentregistrierungen ist der Name des Inhabers vorbehalten.

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	HOUSING LEFT	PA
2	1	HOUSING RIGHT	PA
3	1	HOUSING MIDDLE	PA
4	2	FRONT PLATE	PA
5	2	HINGED COVER	PC
6	1	FOOT CATCH	STL
7	1	SPRING	STL

- General Information:
- Simplified representation, exemplary shown in gray.
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2.
 - PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing are ISO 2768-mK
 - Tolerances for printing DIN ISO 2768-m
 - Machining radii min, R1, further on request
 - Web: www.phoenixcontact.com
- Additional Information:
- A. Pivot bearing HINGED COVER
 - B. Locking HINGED COVER
 - C. Notch for locking release, by screw driver
 - D. Exposed side
 - E. Inner side
 - F. Recommended PCB outline on www.phoenixcontact.com webcode: #0512
 - G. Mounting rail like EN 60715, TH 35-7.5 or mounting rail similar to EN 60715, TH 35-15x15

		DIN A1		document-No. / Ri		date		scale	
				00873769 / 04		05.11.2025		1:1	
		ident.-No.		document-type					
		2713670		TECDOC 2D_Productdrawing					
		description		ME MAX 35 2-2 KMGY					
page 1		of 1							