




HOUSING LEFT

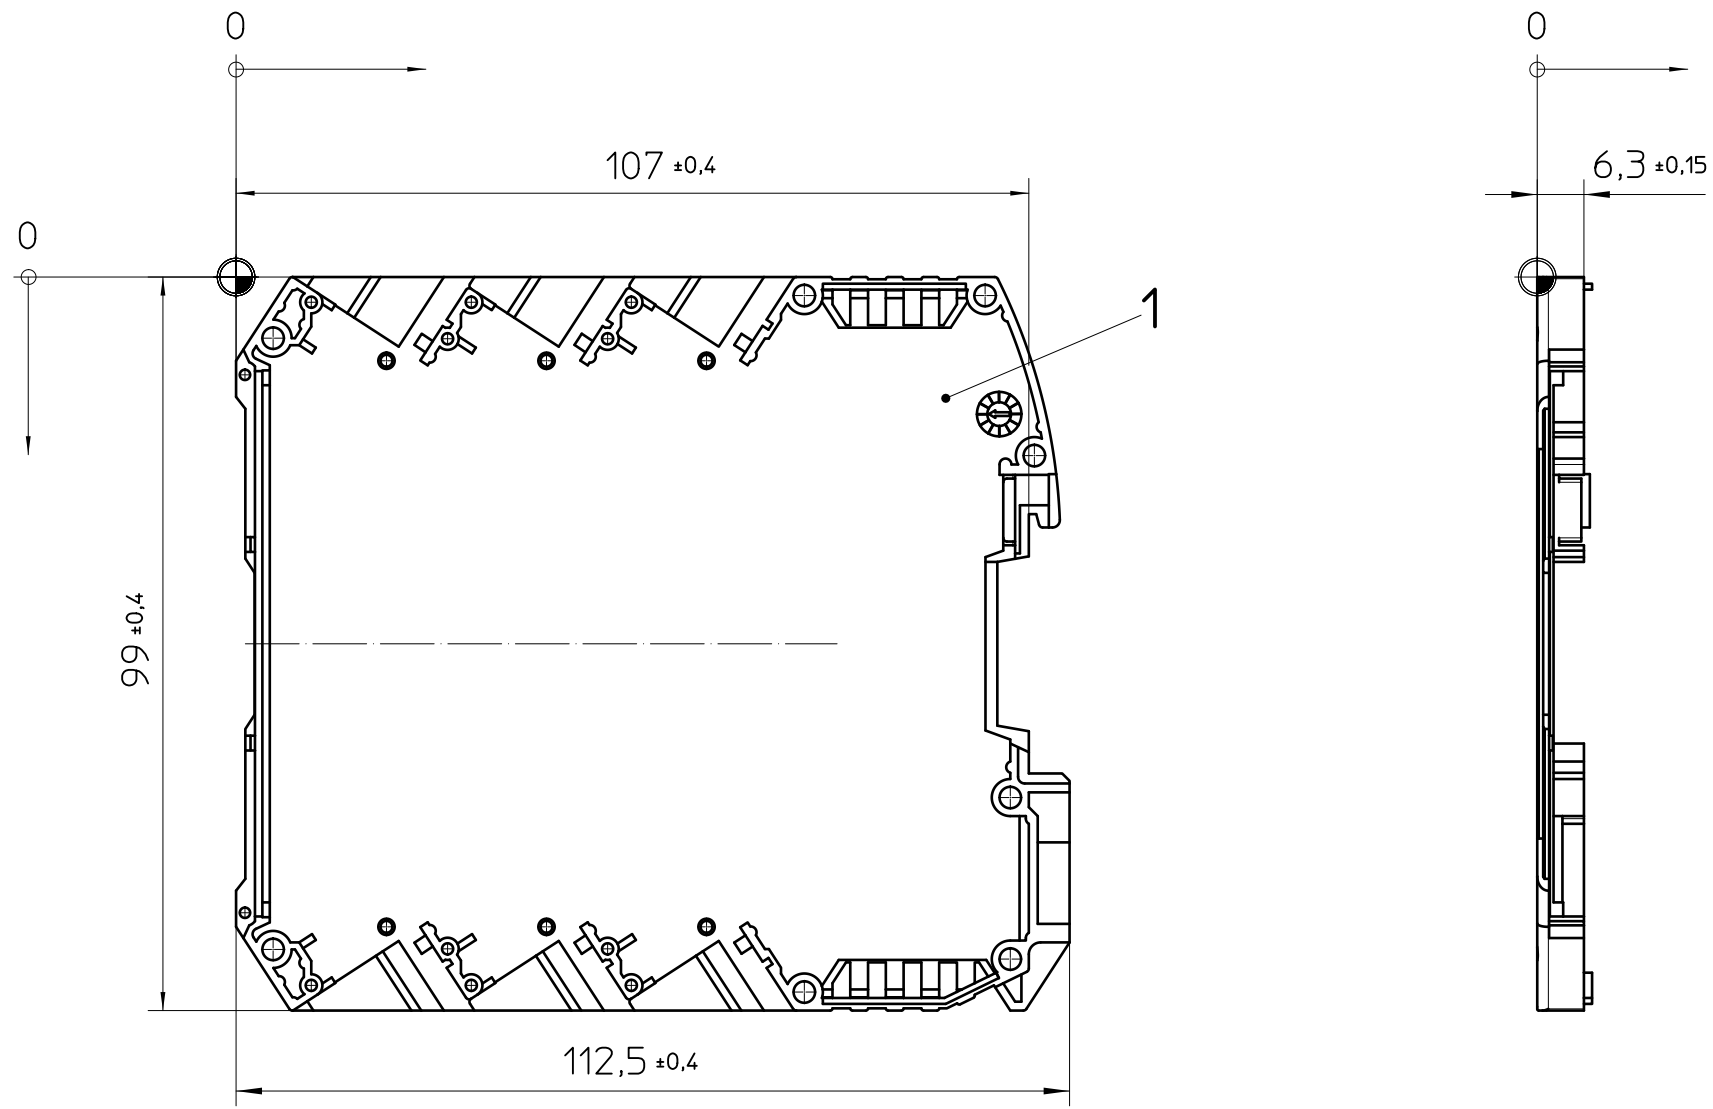


HOUSING RIGHT

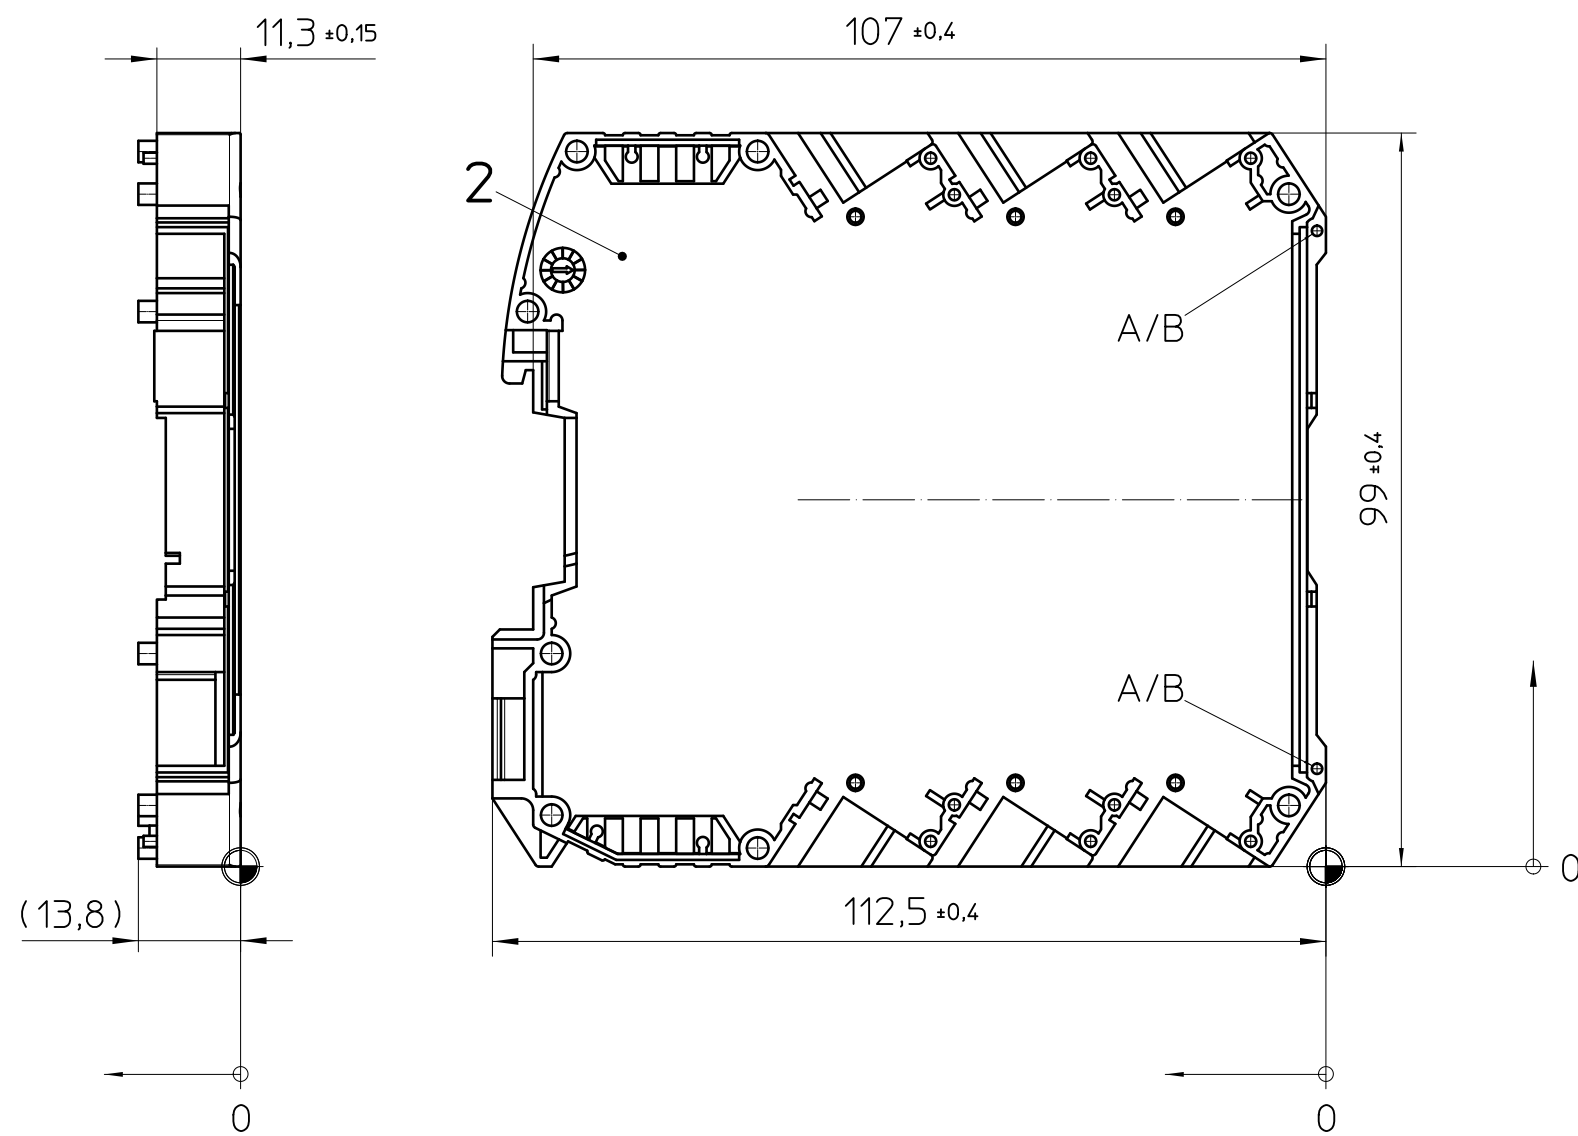


Assembly example: ME MAX 35 3-3

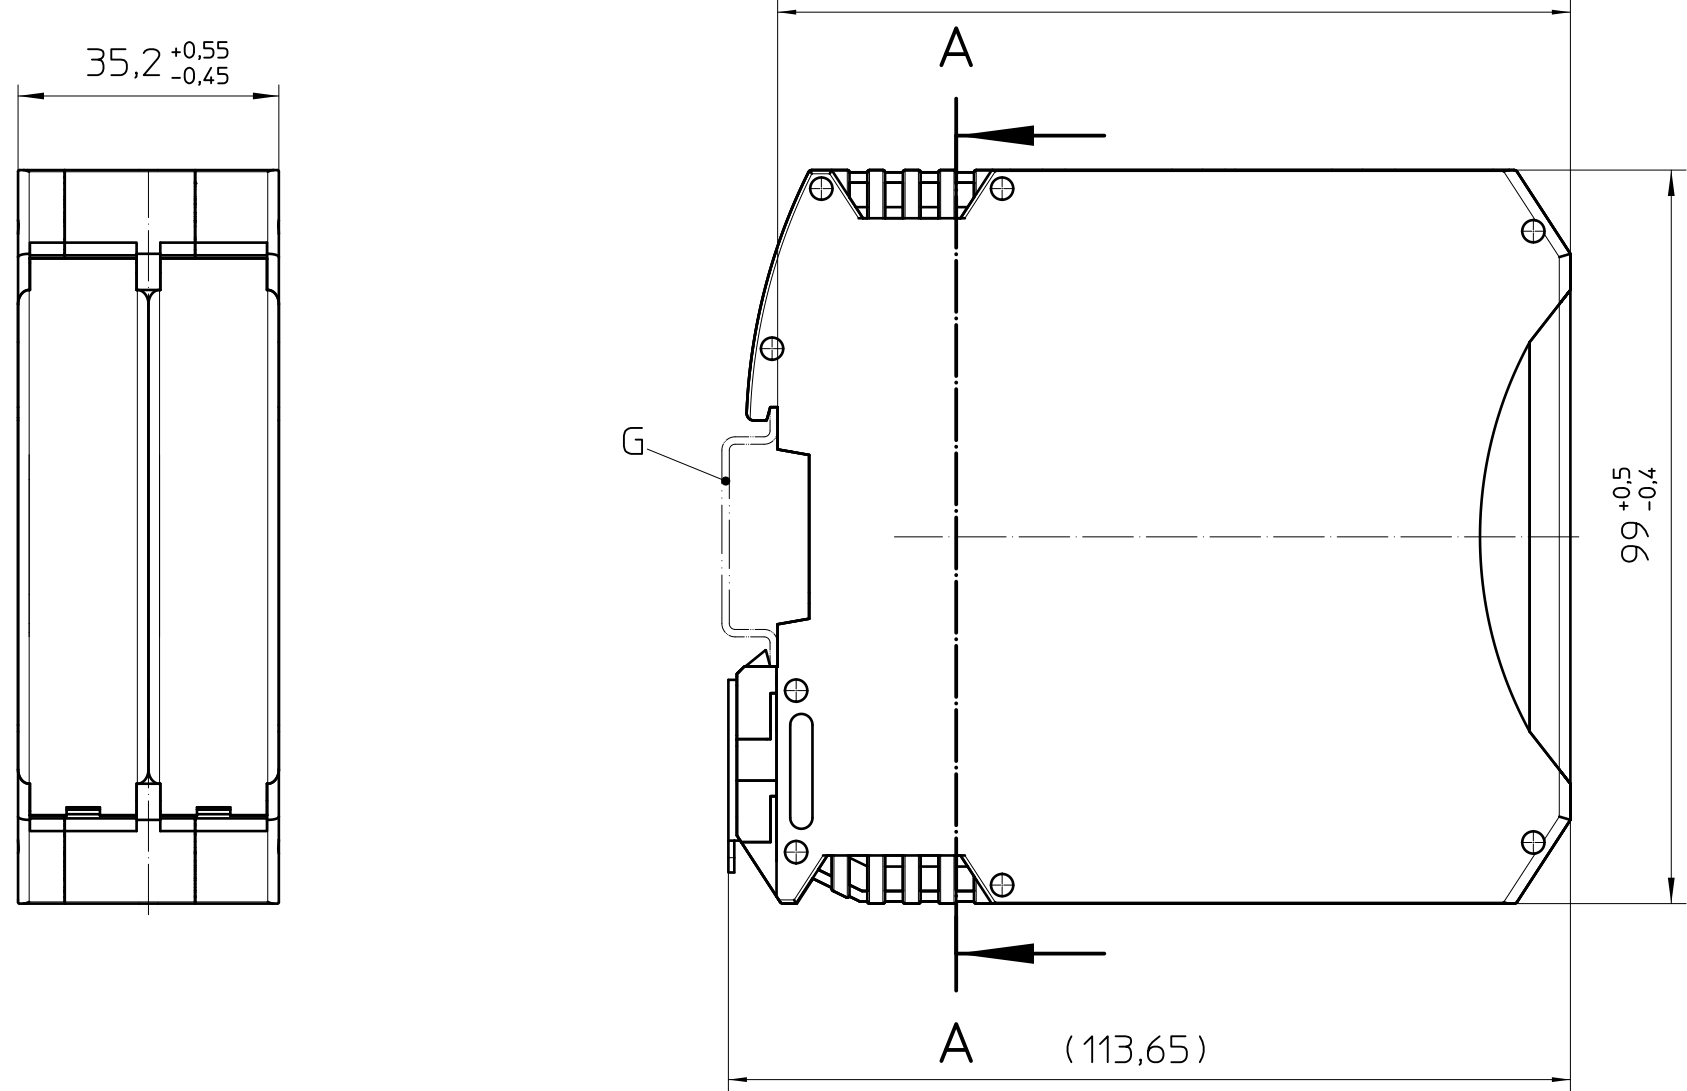


HOUSING MIDDLE

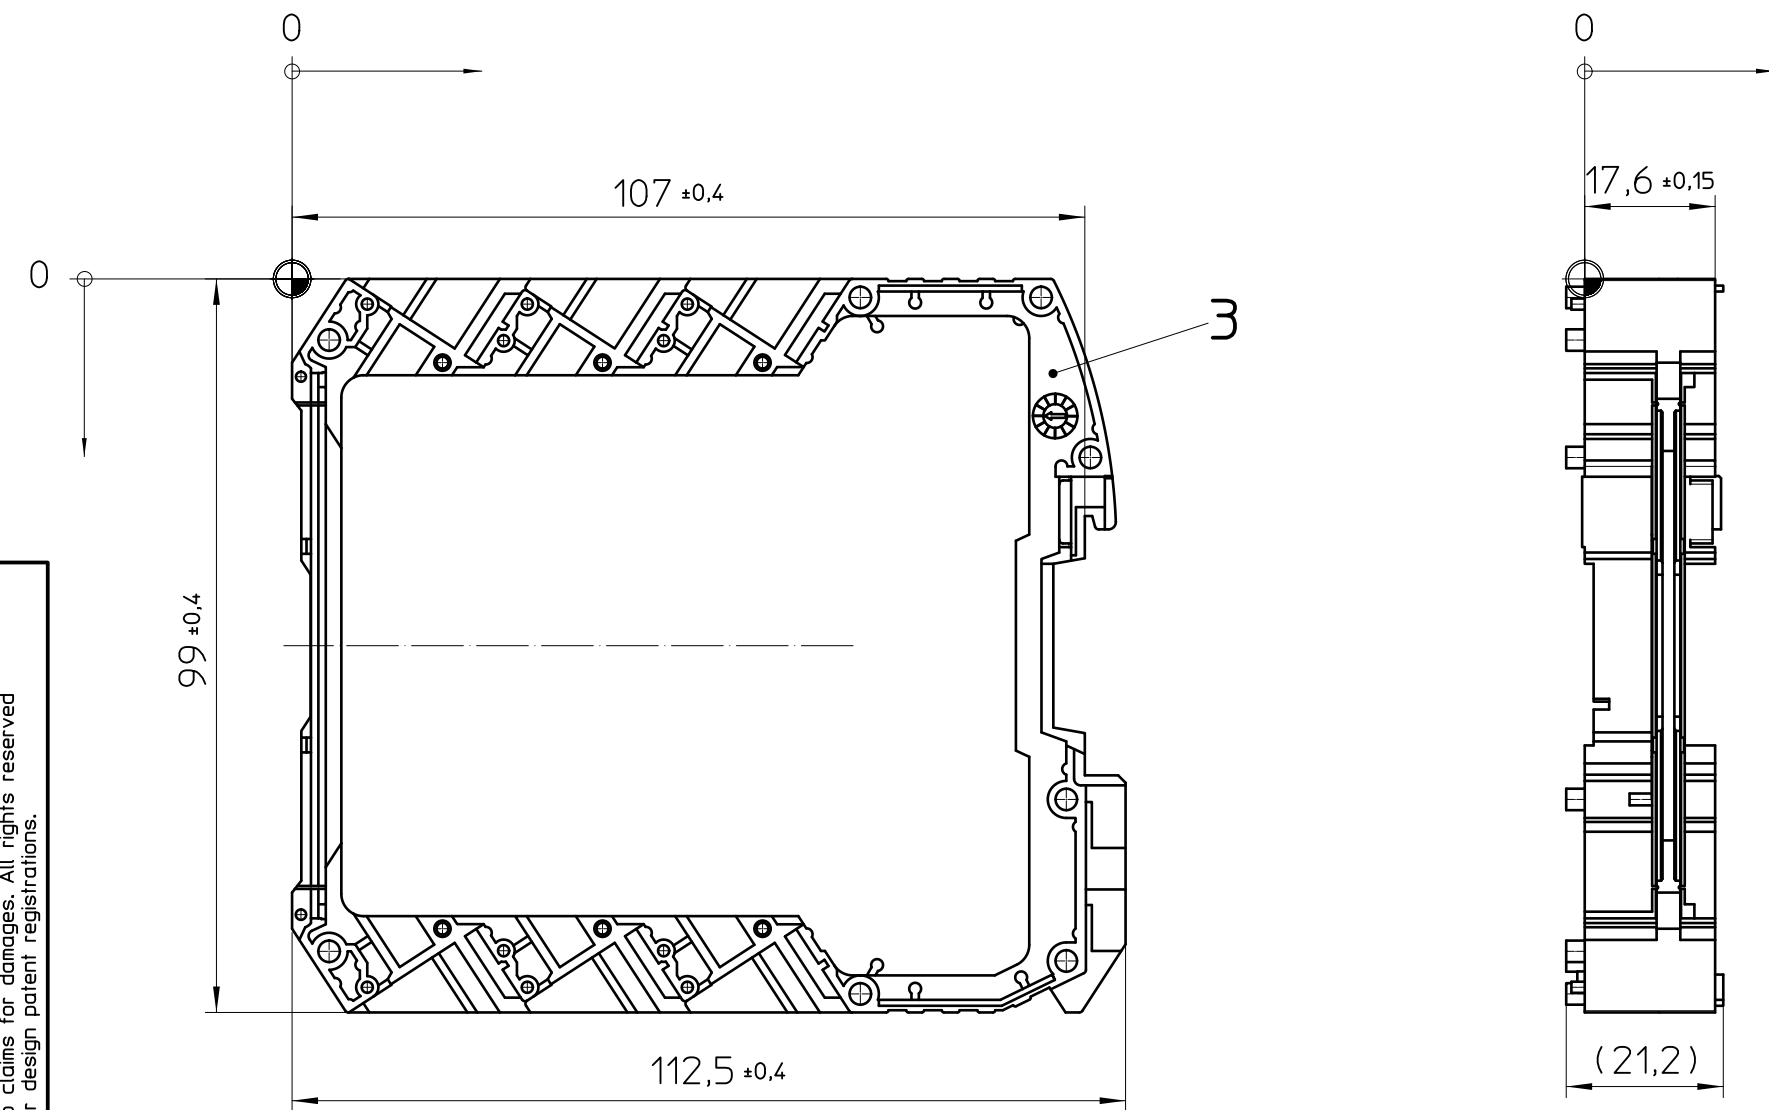


FRONT PLATE

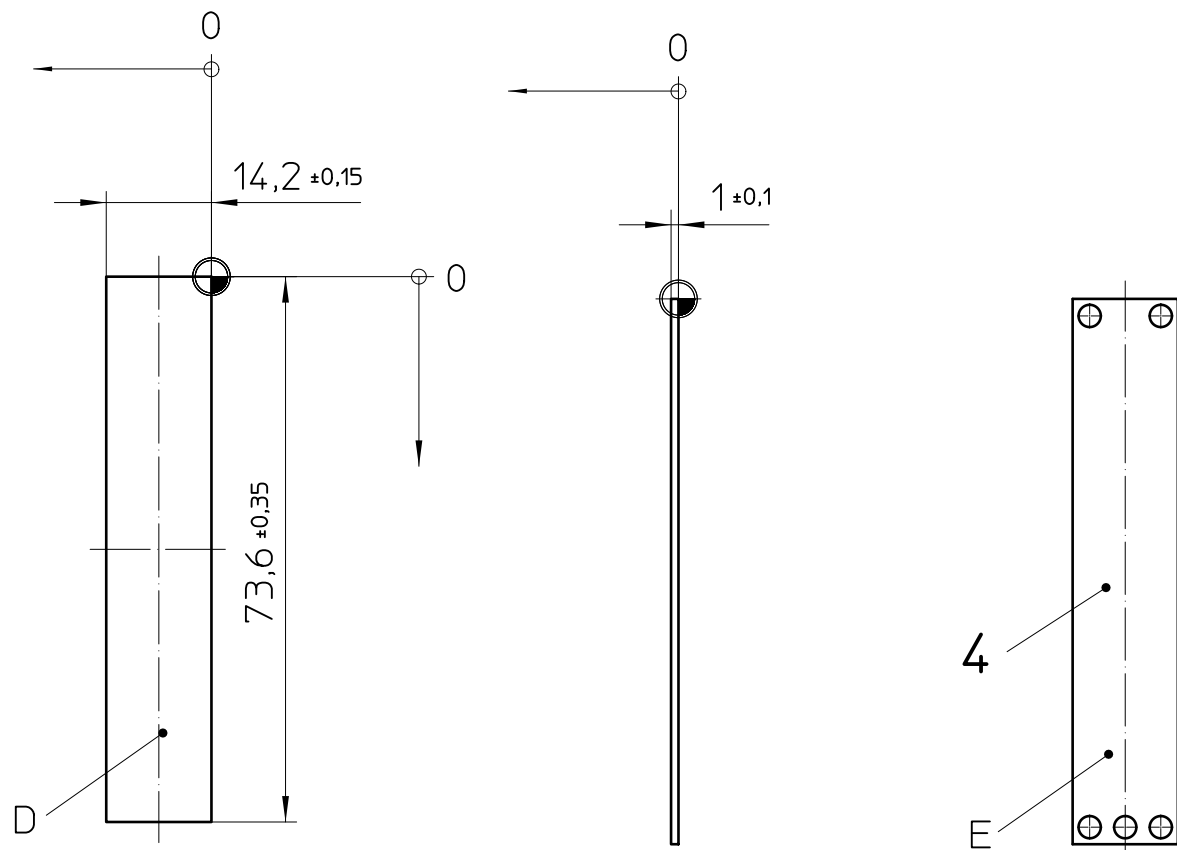

A-A

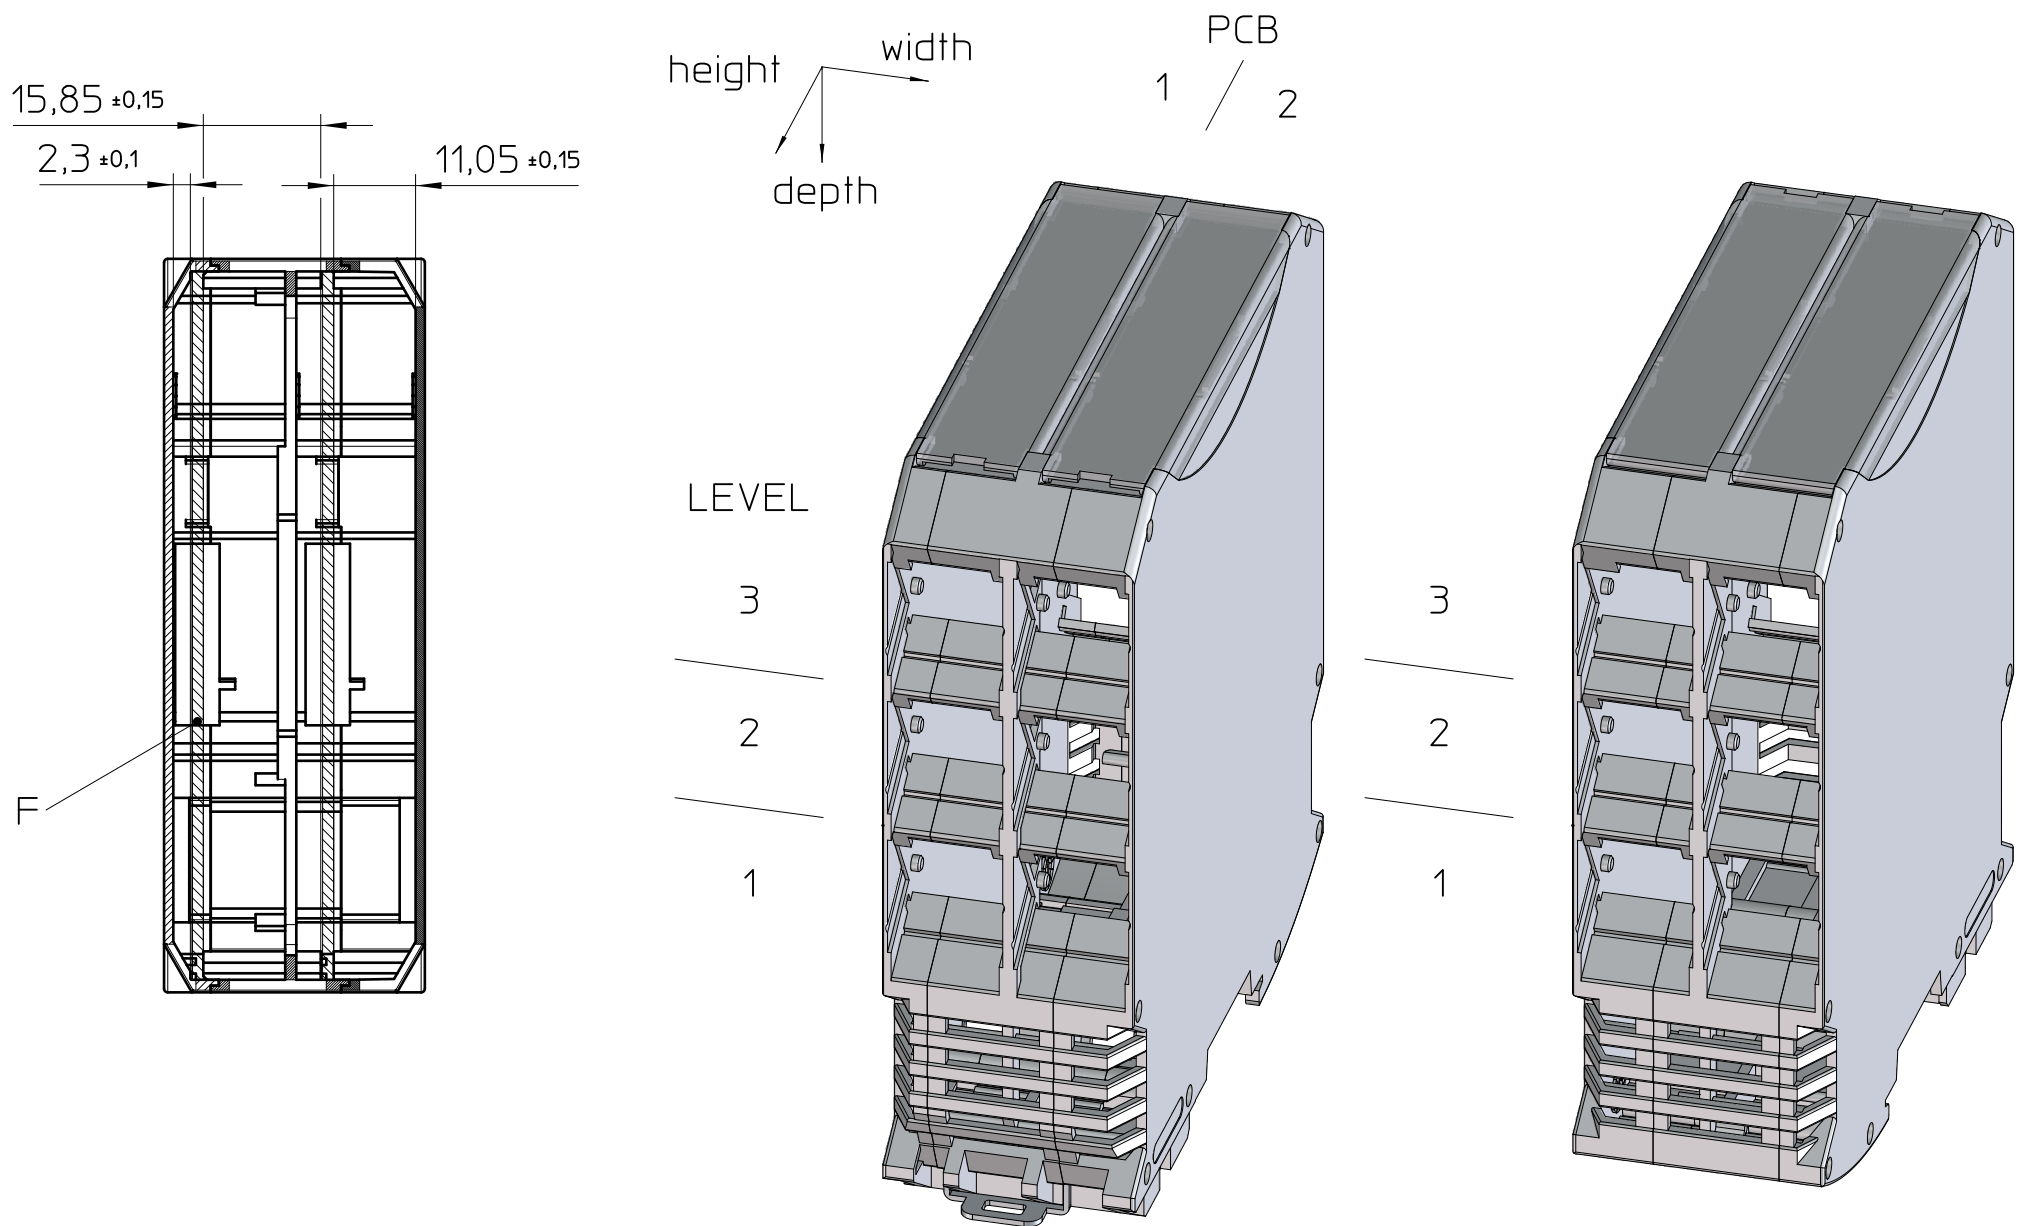


HINGED COVER

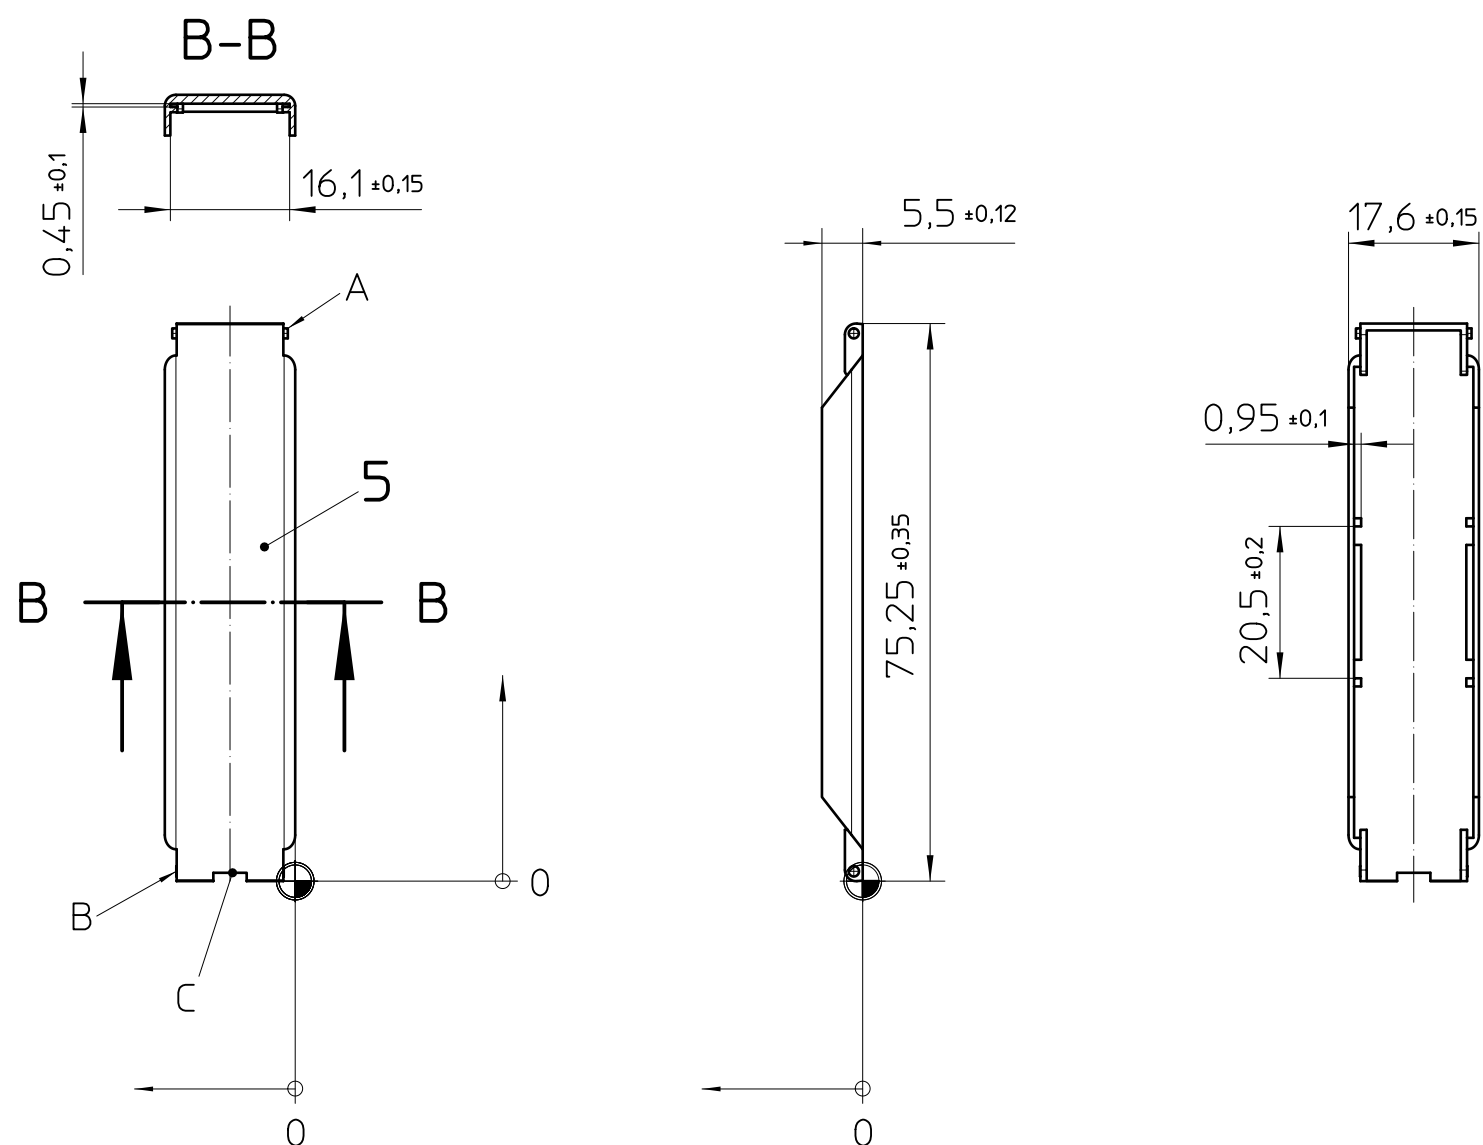


FOOT CATCH

2:1

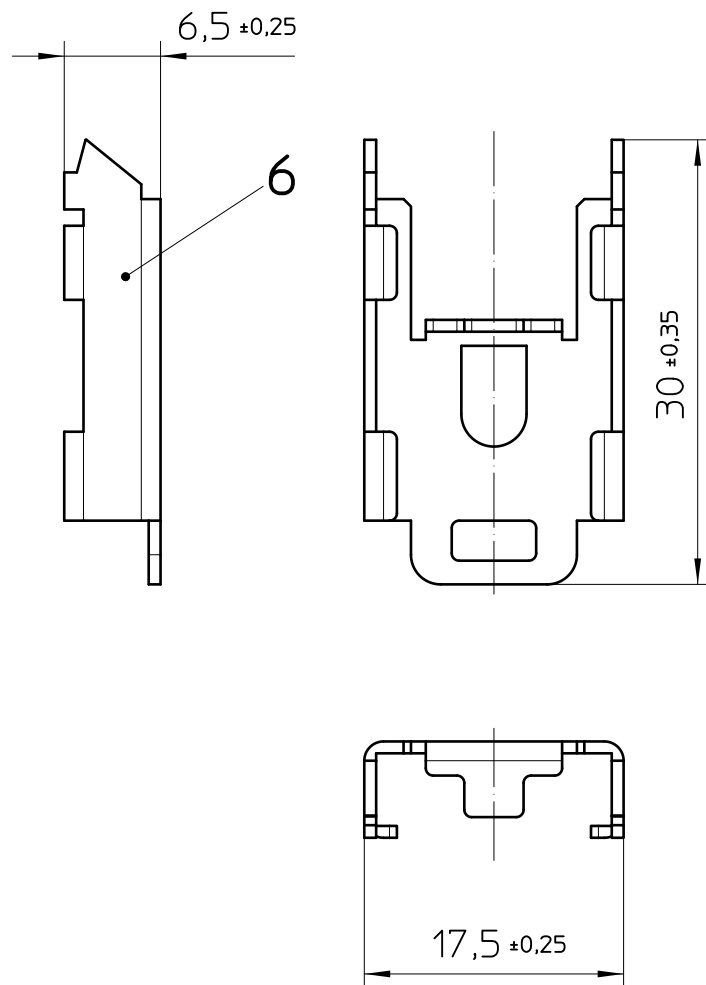

SPRING

5:1

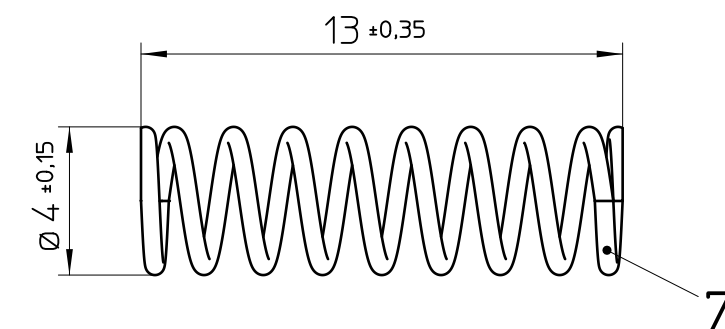

- General Information:
- Simplified representation, exemplary shown in gray.
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing are ISO 2768-mK
 - Tolerances for printing DIN ISO 2768-m
 - Machining radii min. R1, further on request
 - Web: www.phoenixcontact.com

- Additional Information:
- A. Pivot bearing HINGED COVER
 - B. Locking HINGED COVER
 - C. Notch for locking release, by screw driver
 - D. Exposed side
 - E. Inner side
 - F. Recommended PCB outline on www.phoenixcontact.com webcode: #0512
 - G. Mounting rail like EN 60715, TH 35-7.5 or mounting rail similar to EN 60715, TH 35-15x1.5

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	HOUSING LEFT	PA
2	1	HOUSING RIGHT	PA
3	1	HOUSING MIDDLE	PA
4	2	FRONT PLATE	PA
5	2	HINGED COVER	PC
6	1	FOOT CATCH	STL
7	1	SPRING	STL

DIN A1		document-No. / Ri	date	scale
00873621 / 04		2713696	05.11.2025	1:1
ident.-No.		document-type		
2713696		TECDOC 2D_Productdrawing		
page 1		description		
of 1		ME MAX 35 3-3 KMGY		