


A
B
C
D


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent has been obtained from the Phoenix Contact AG. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Der Fall der Patent-, Gebrauchsmuster- oder Designschutzrechte vorbehalten.


HOUSING LEFT

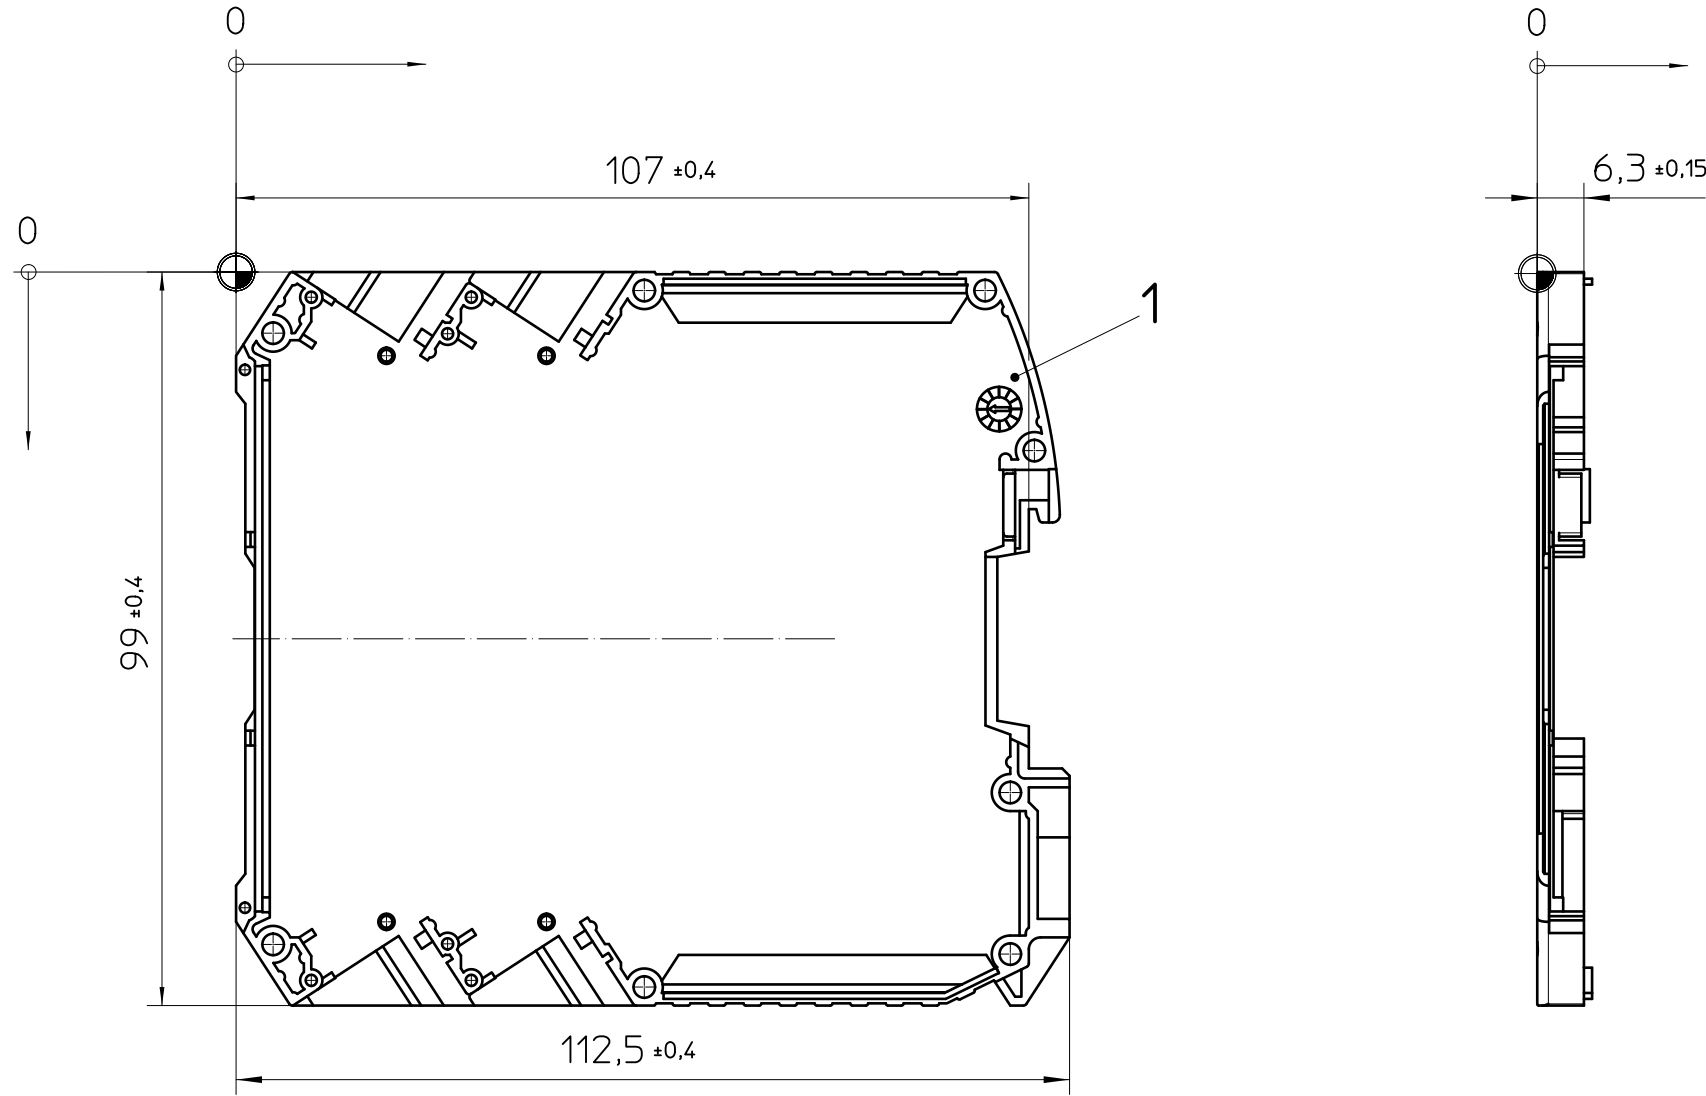


HOUSING RIGHT

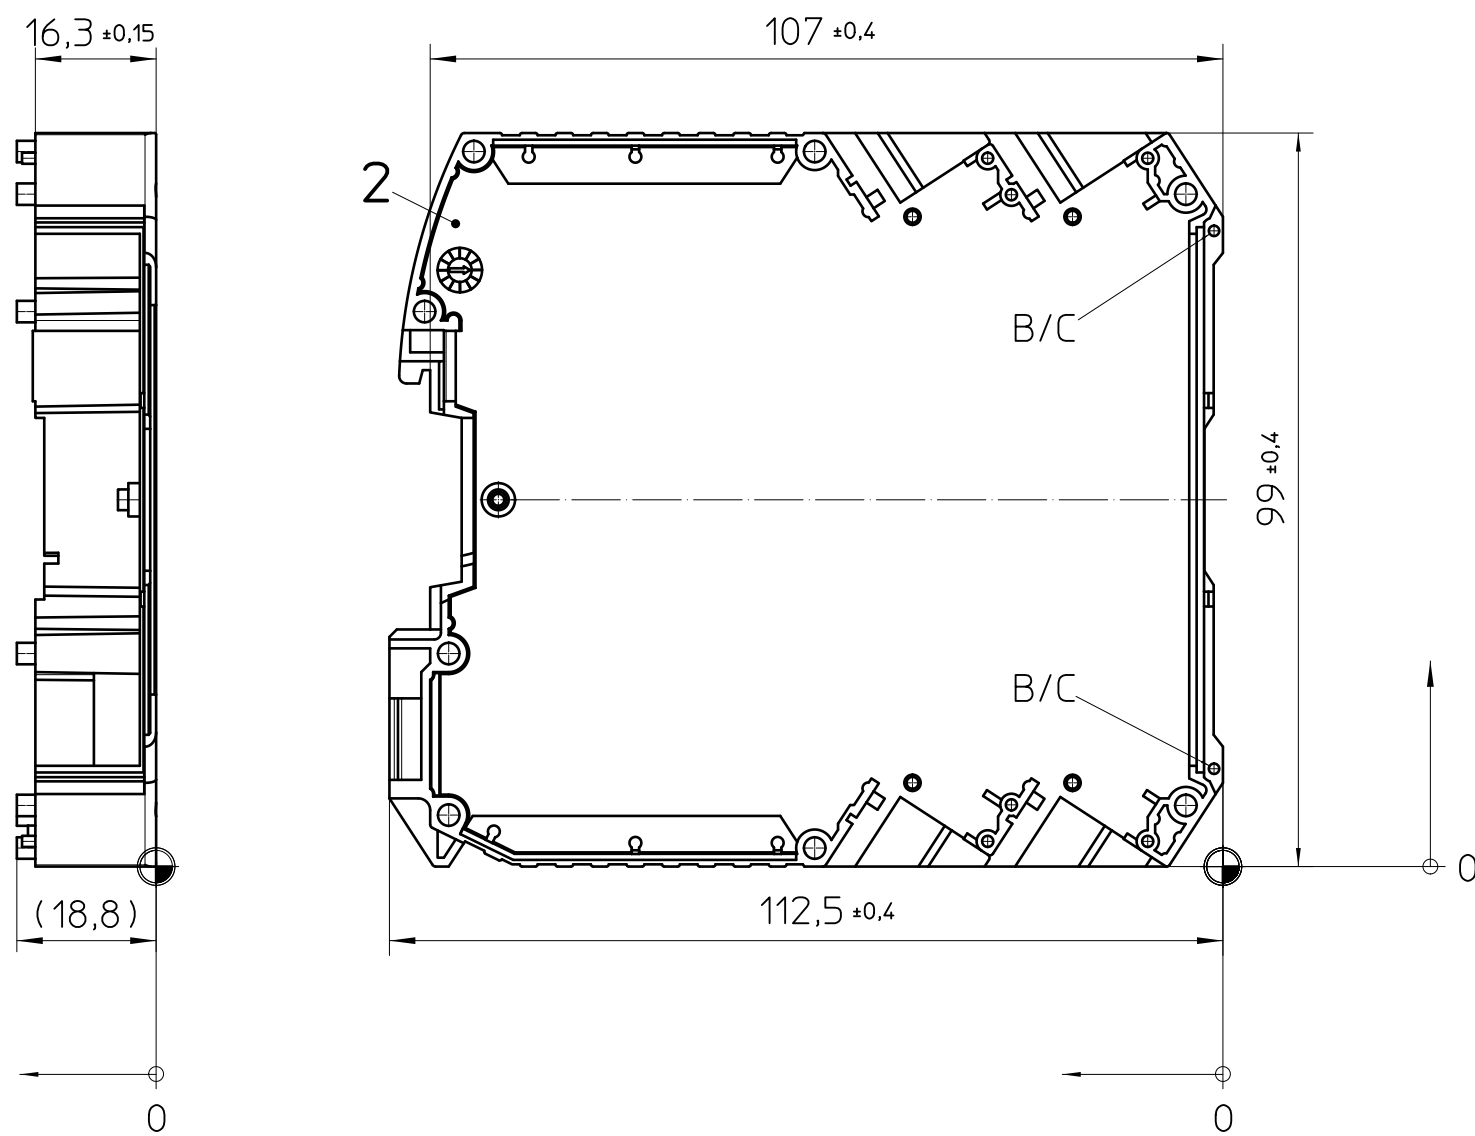



HOUSING MIDDLE

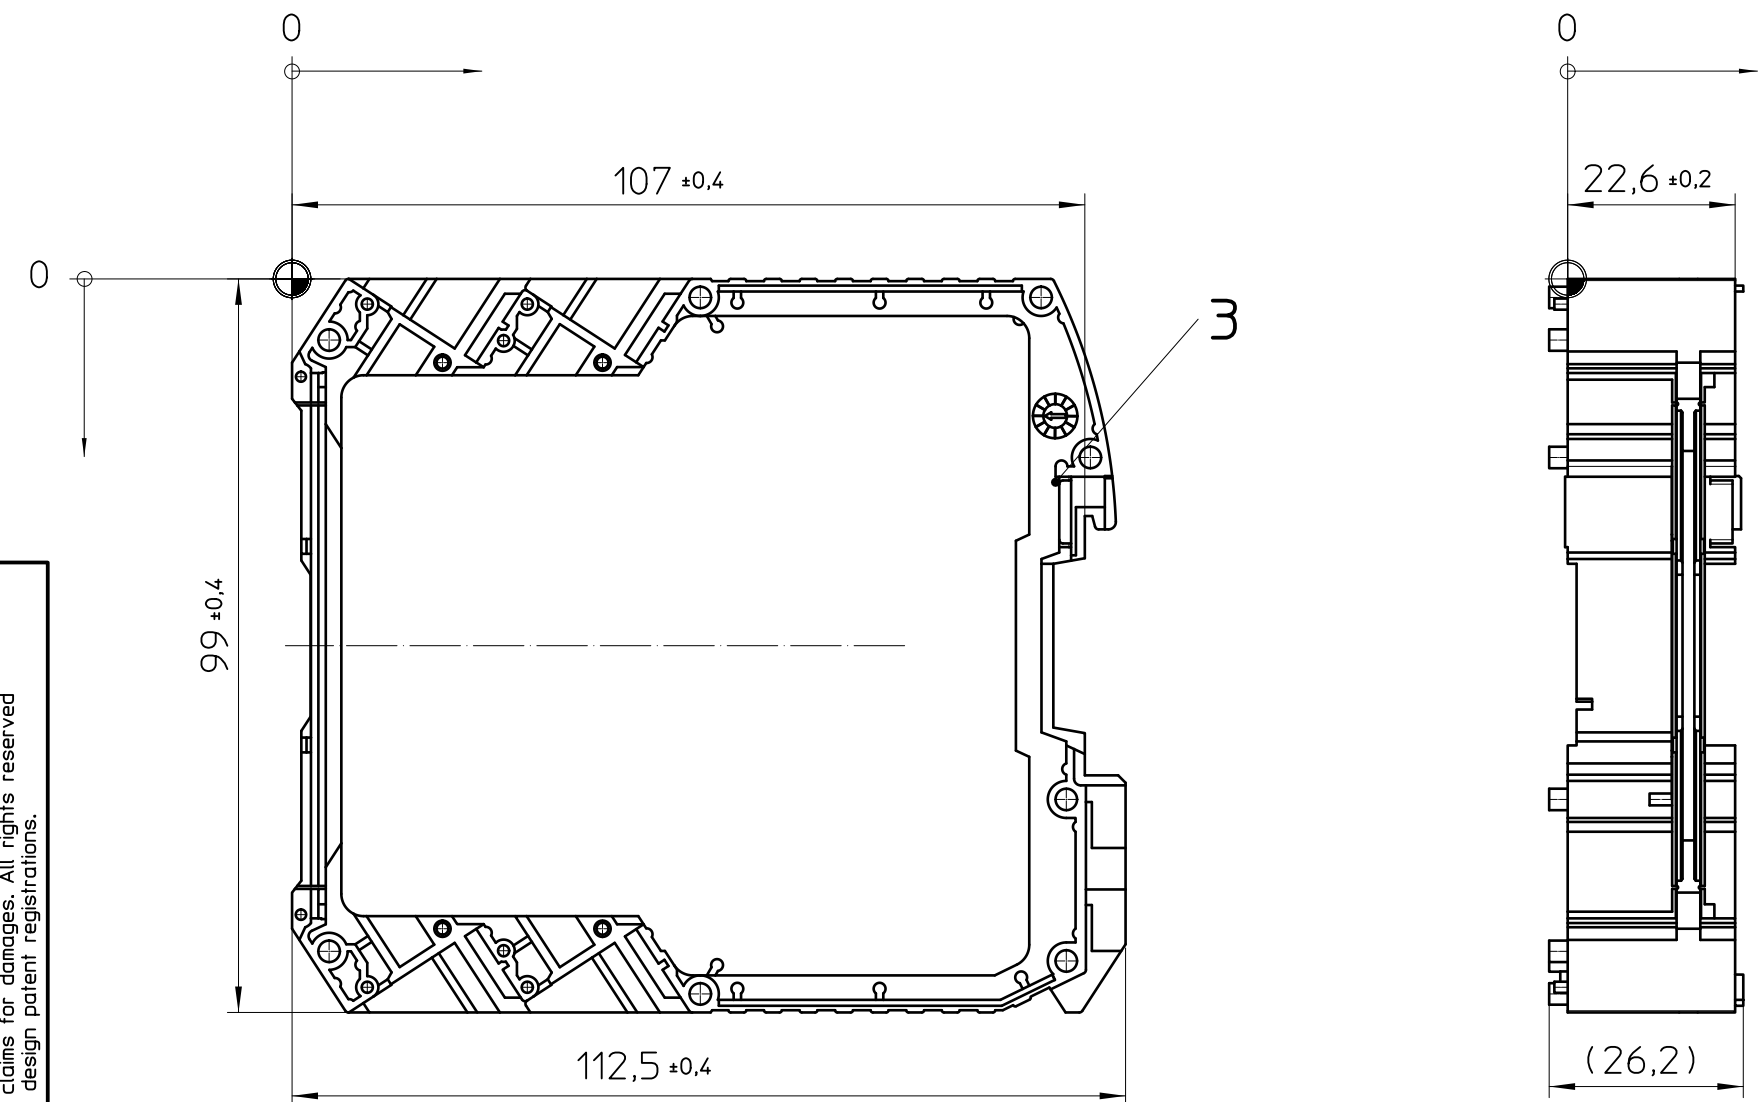


FRONT PLATE

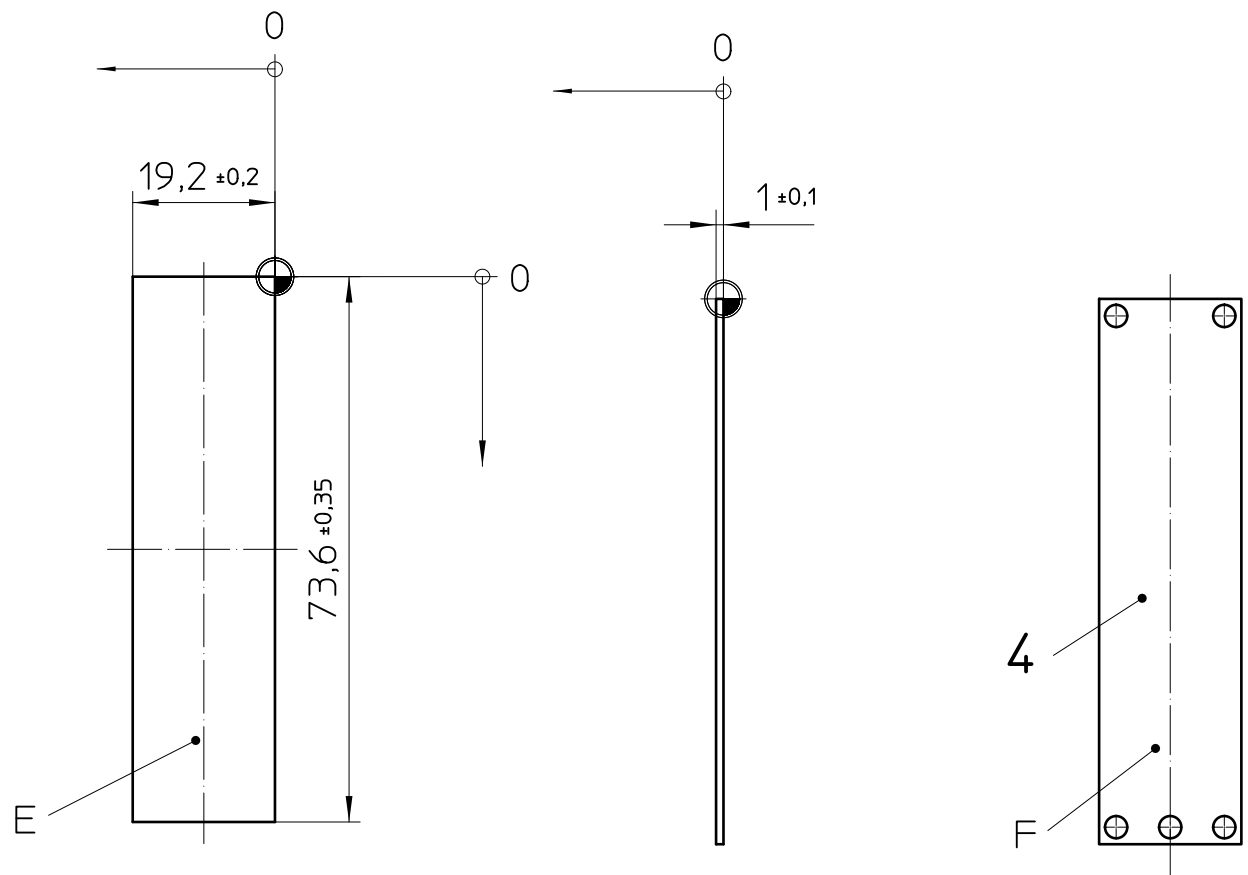


Assembly example: ME MAX 45 G 2-2

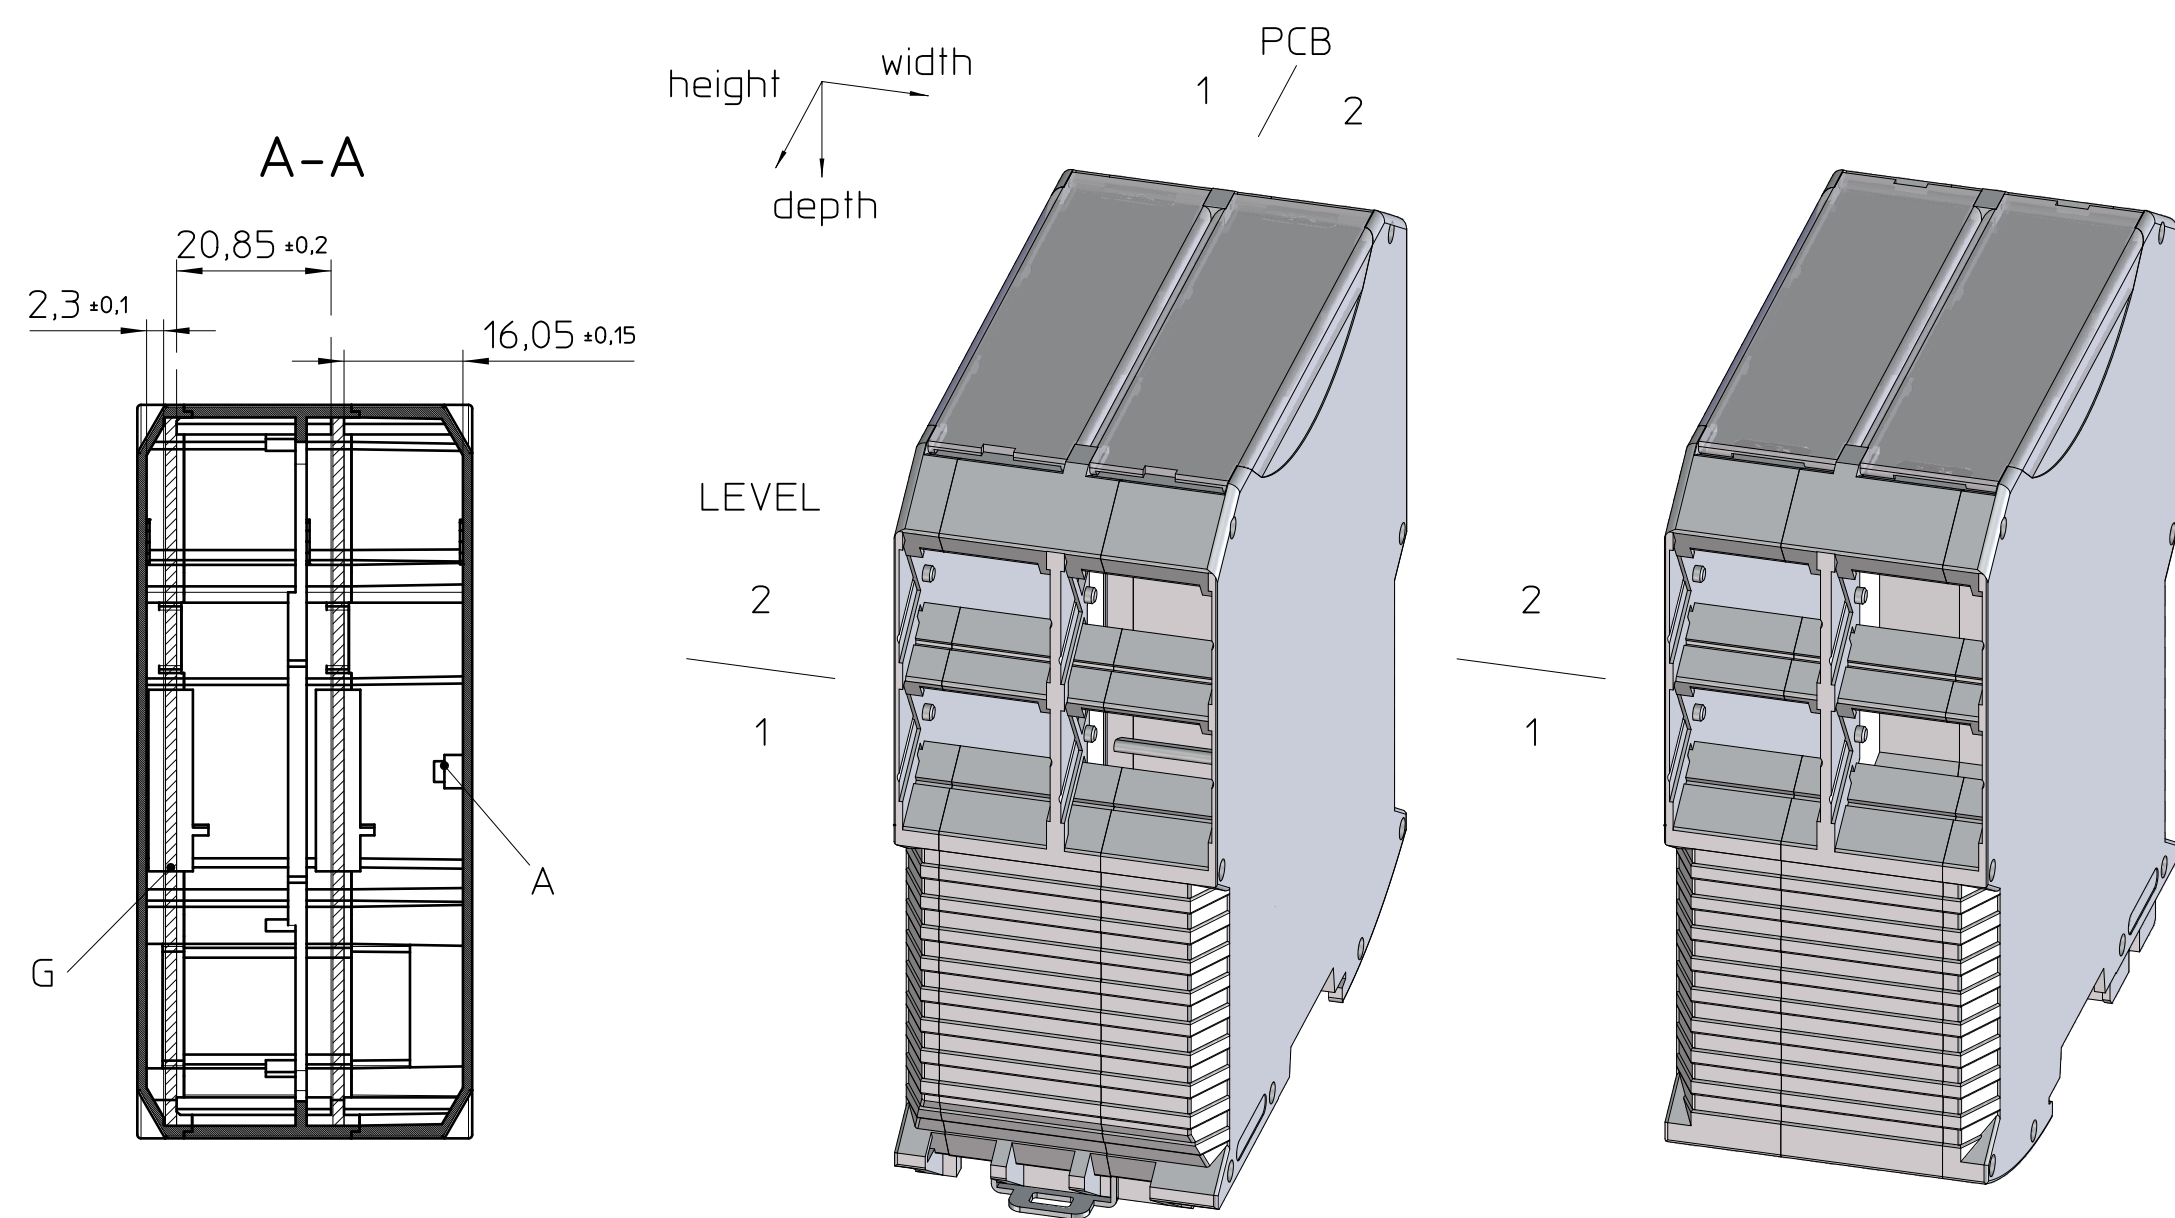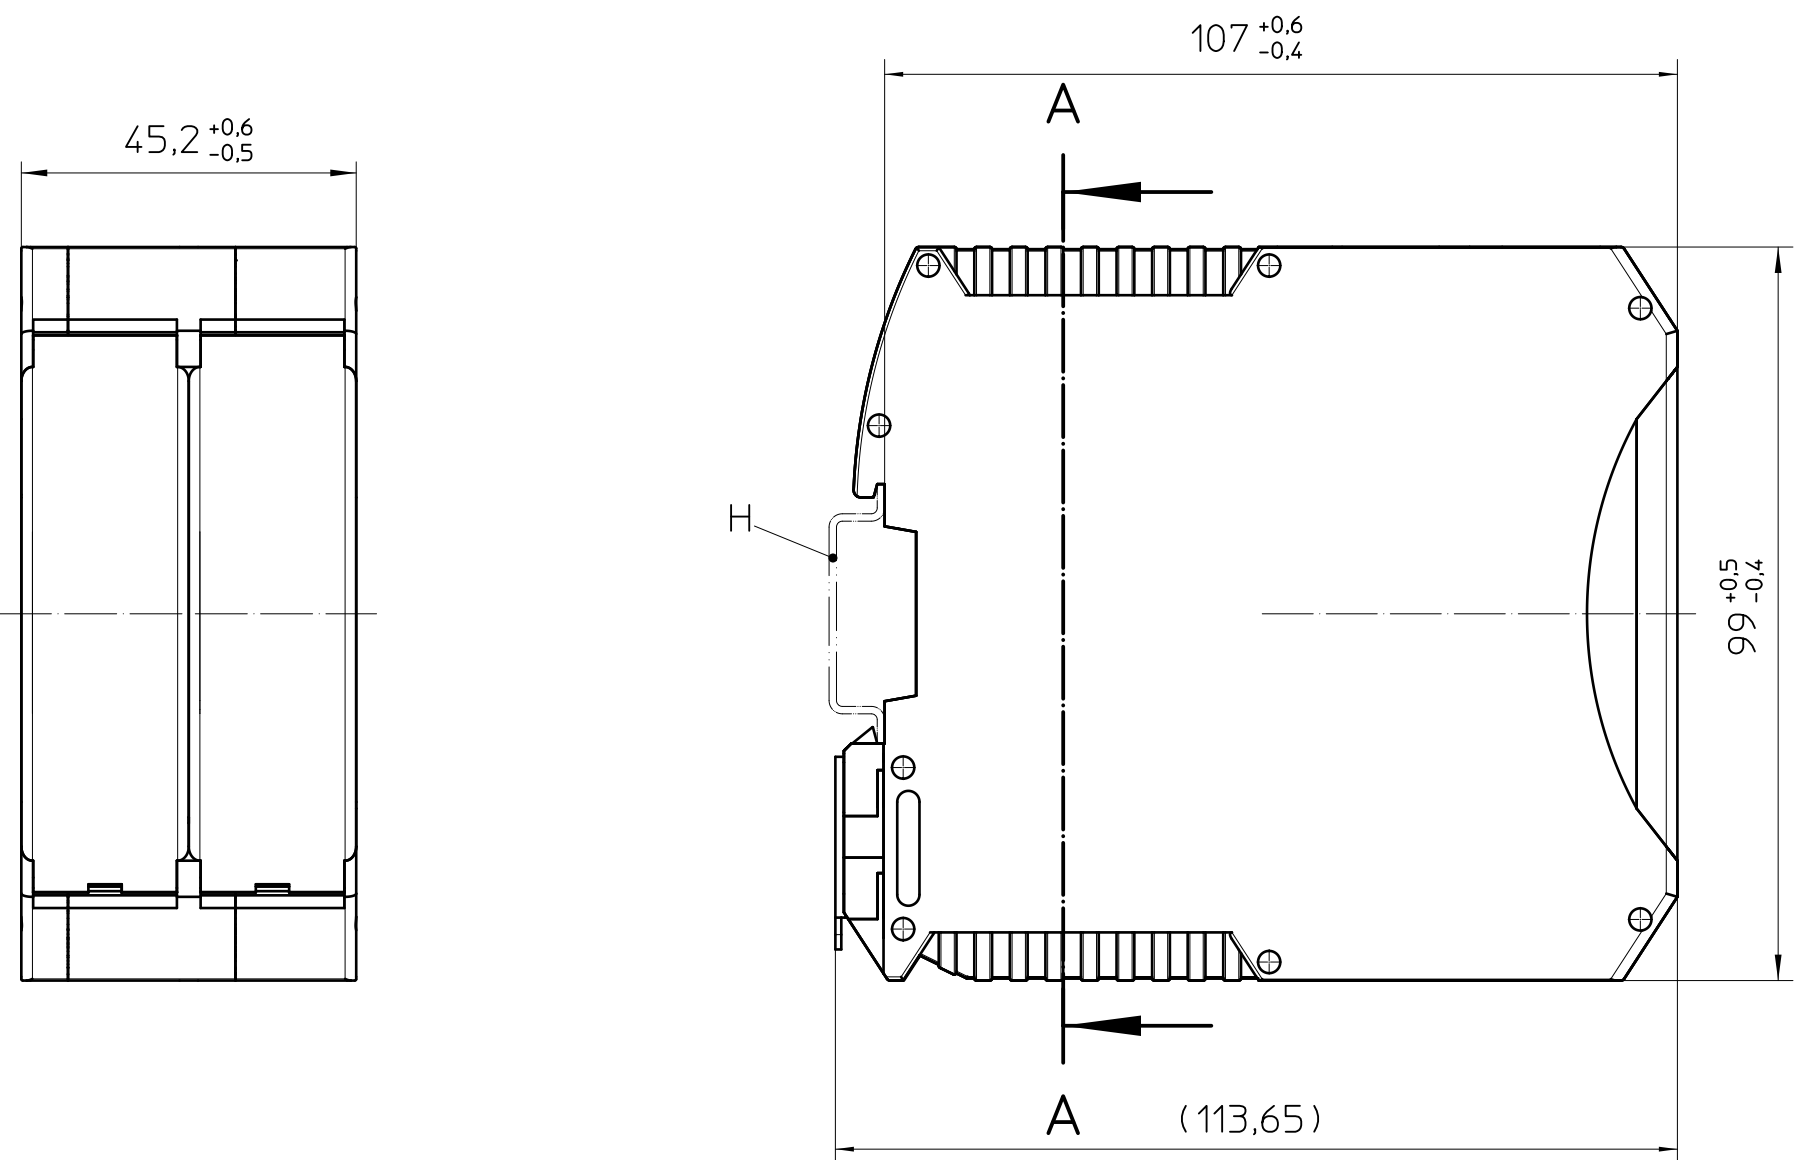


HINGED COVER

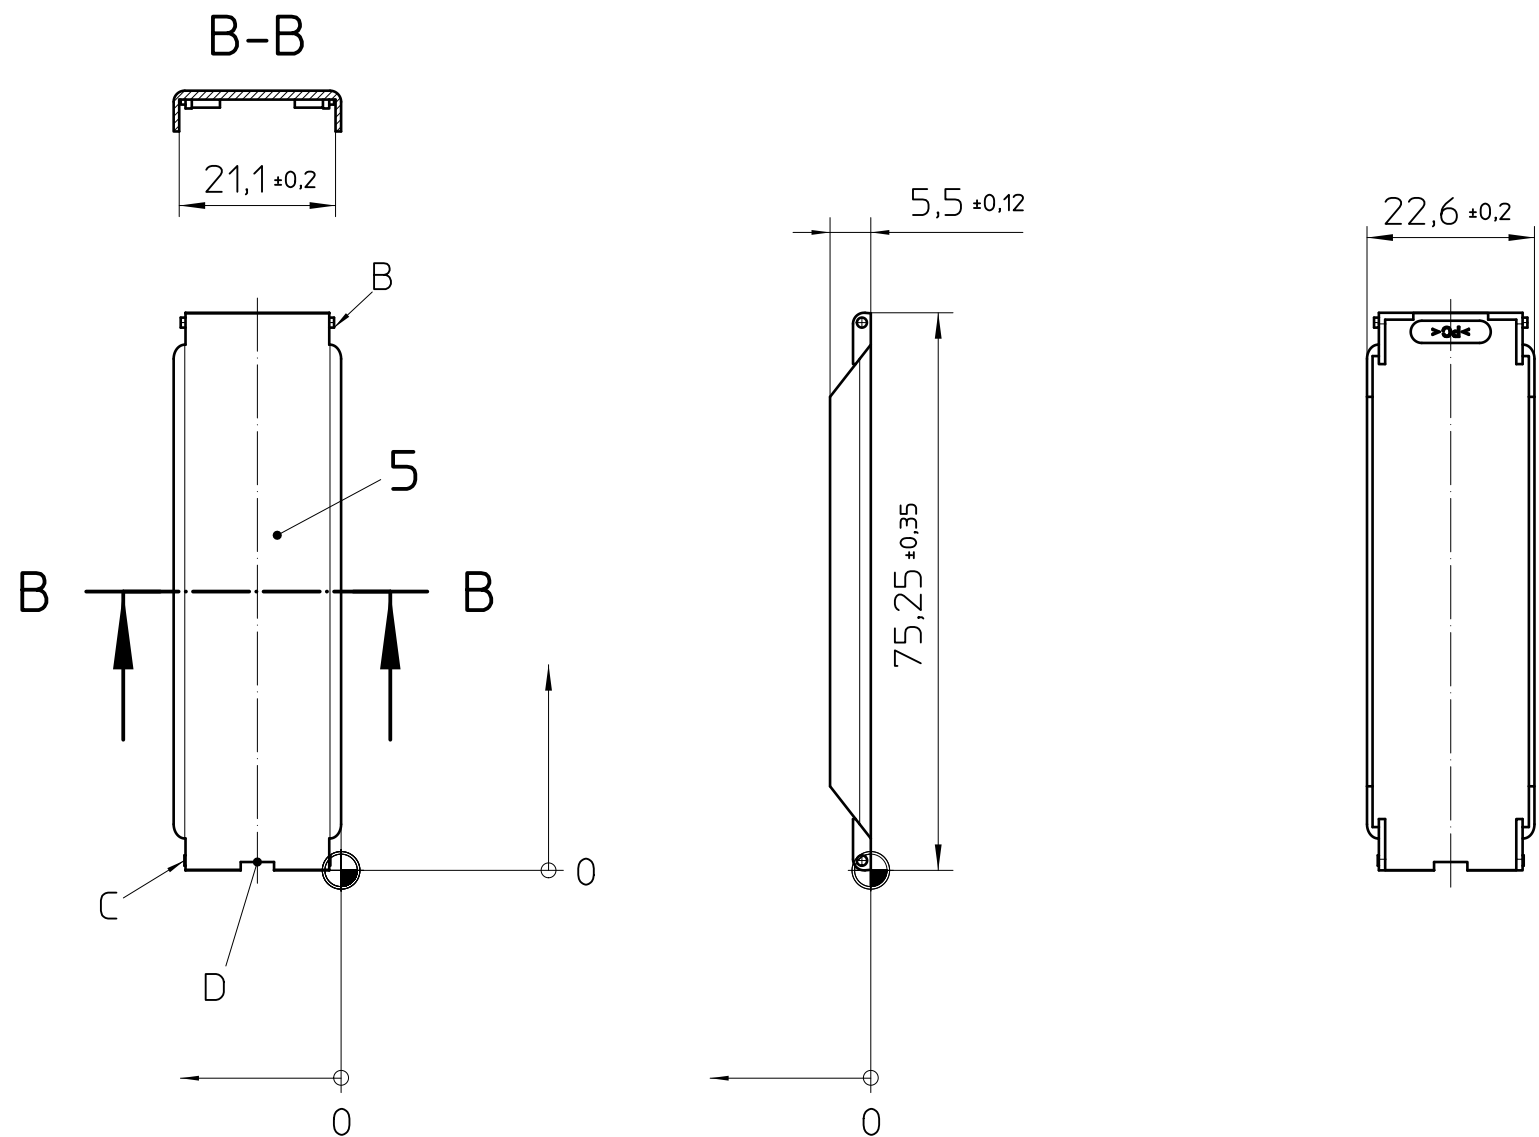

FOOT CATCH
2:1

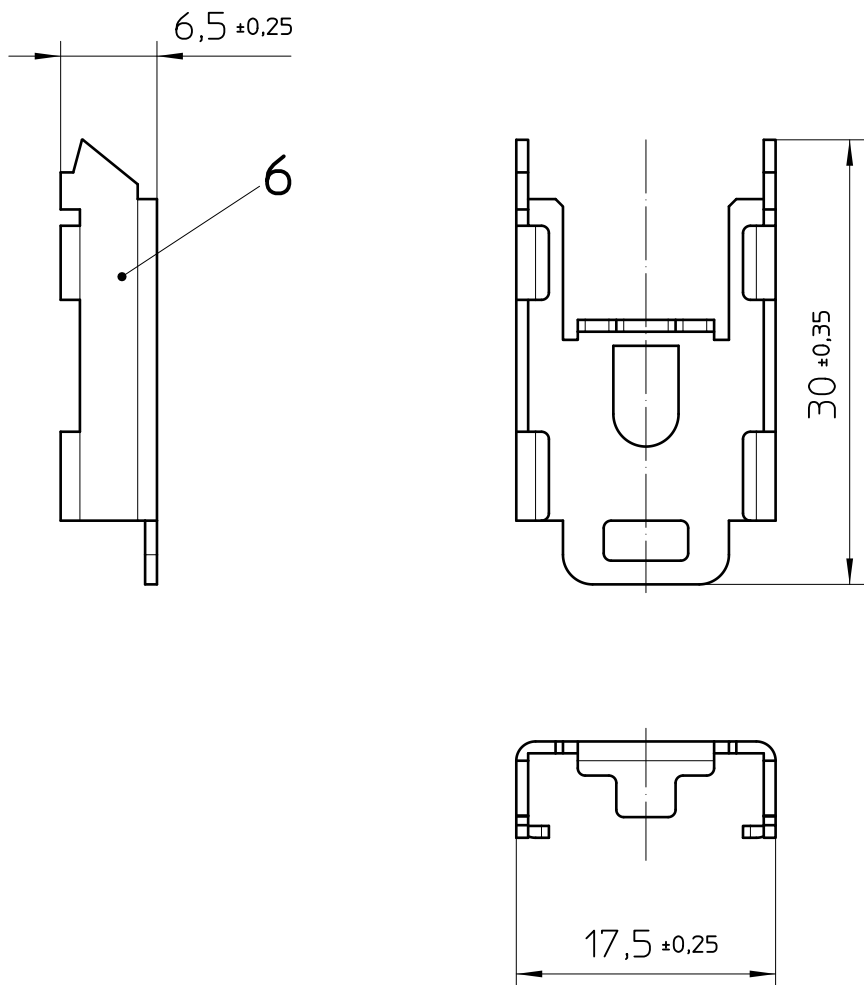

SPRING
5:1

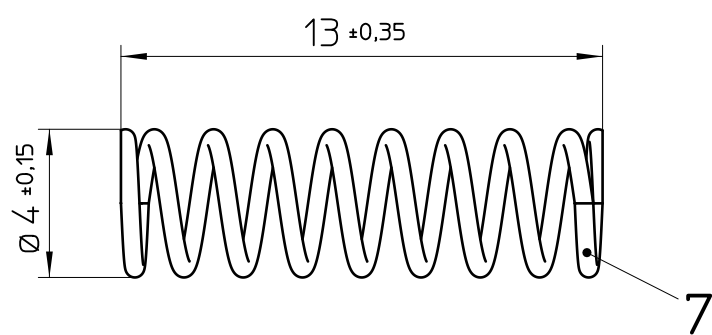

- General Information
- Simplified representation, exemplary shown in gray.
 - Document excluded from change process
 - Dimensions in millimeters [mm], angles in degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2.
 - PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing are ISO 2768-mK
 - Tolerances for printing DIN ISO 2768-m
 - Machining radii min. R1, further on request
 - Web: www.phoenixcontact.com

- Additional information
- A. Attachment point for the optional PCB
 - B. Pivot bearing HINGED COVER
 - C. Locking HINGED COVER
 - D. Notch for locking release, by screw driver
 - E. Exposed side
 - F. Inner side
 - G. Recommended PCB outline on www.phoenixcontact.com webcode: #0512
 - H. Mounting rail like EN 60715: TH 35-7.5 or mounting rail TH 35-15x1.5 similar to EN 60715

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	HOUSING LEFT	PA
2	1	HOUSING RIGHT	PA
3	1	HOUSING MIDDLE	PA
4	2	FRONT PLATE	PA
5	2	HINGED COVER	PC
6	1	FOOT CATCH	STL
7	1	SPRING	STL

DIN A1		document-No. / Ri	date	scale
00877686 / 03		2713719	05.11.2025	1:1
Phoenix Contact		document-type	TECDOC 2D_Productdrawing	
page 1		of 1		ME MAX 45 G 2-2 KMGY