

HOUSING LEFT


Technical drawing of the HOUSING LEFT, showing a front view and a side view.

The front view (left) shows a square frame with dimensions:


- Width: 107 ± 0.4
- Height: 99 ± 0.4
- Bottom width: 112.5 ± 0.4

The side view (right) shows a depth of 6.3 ± 0.15 .

The drawing includes a coordinate system with X and Y axes and a section line A-A.

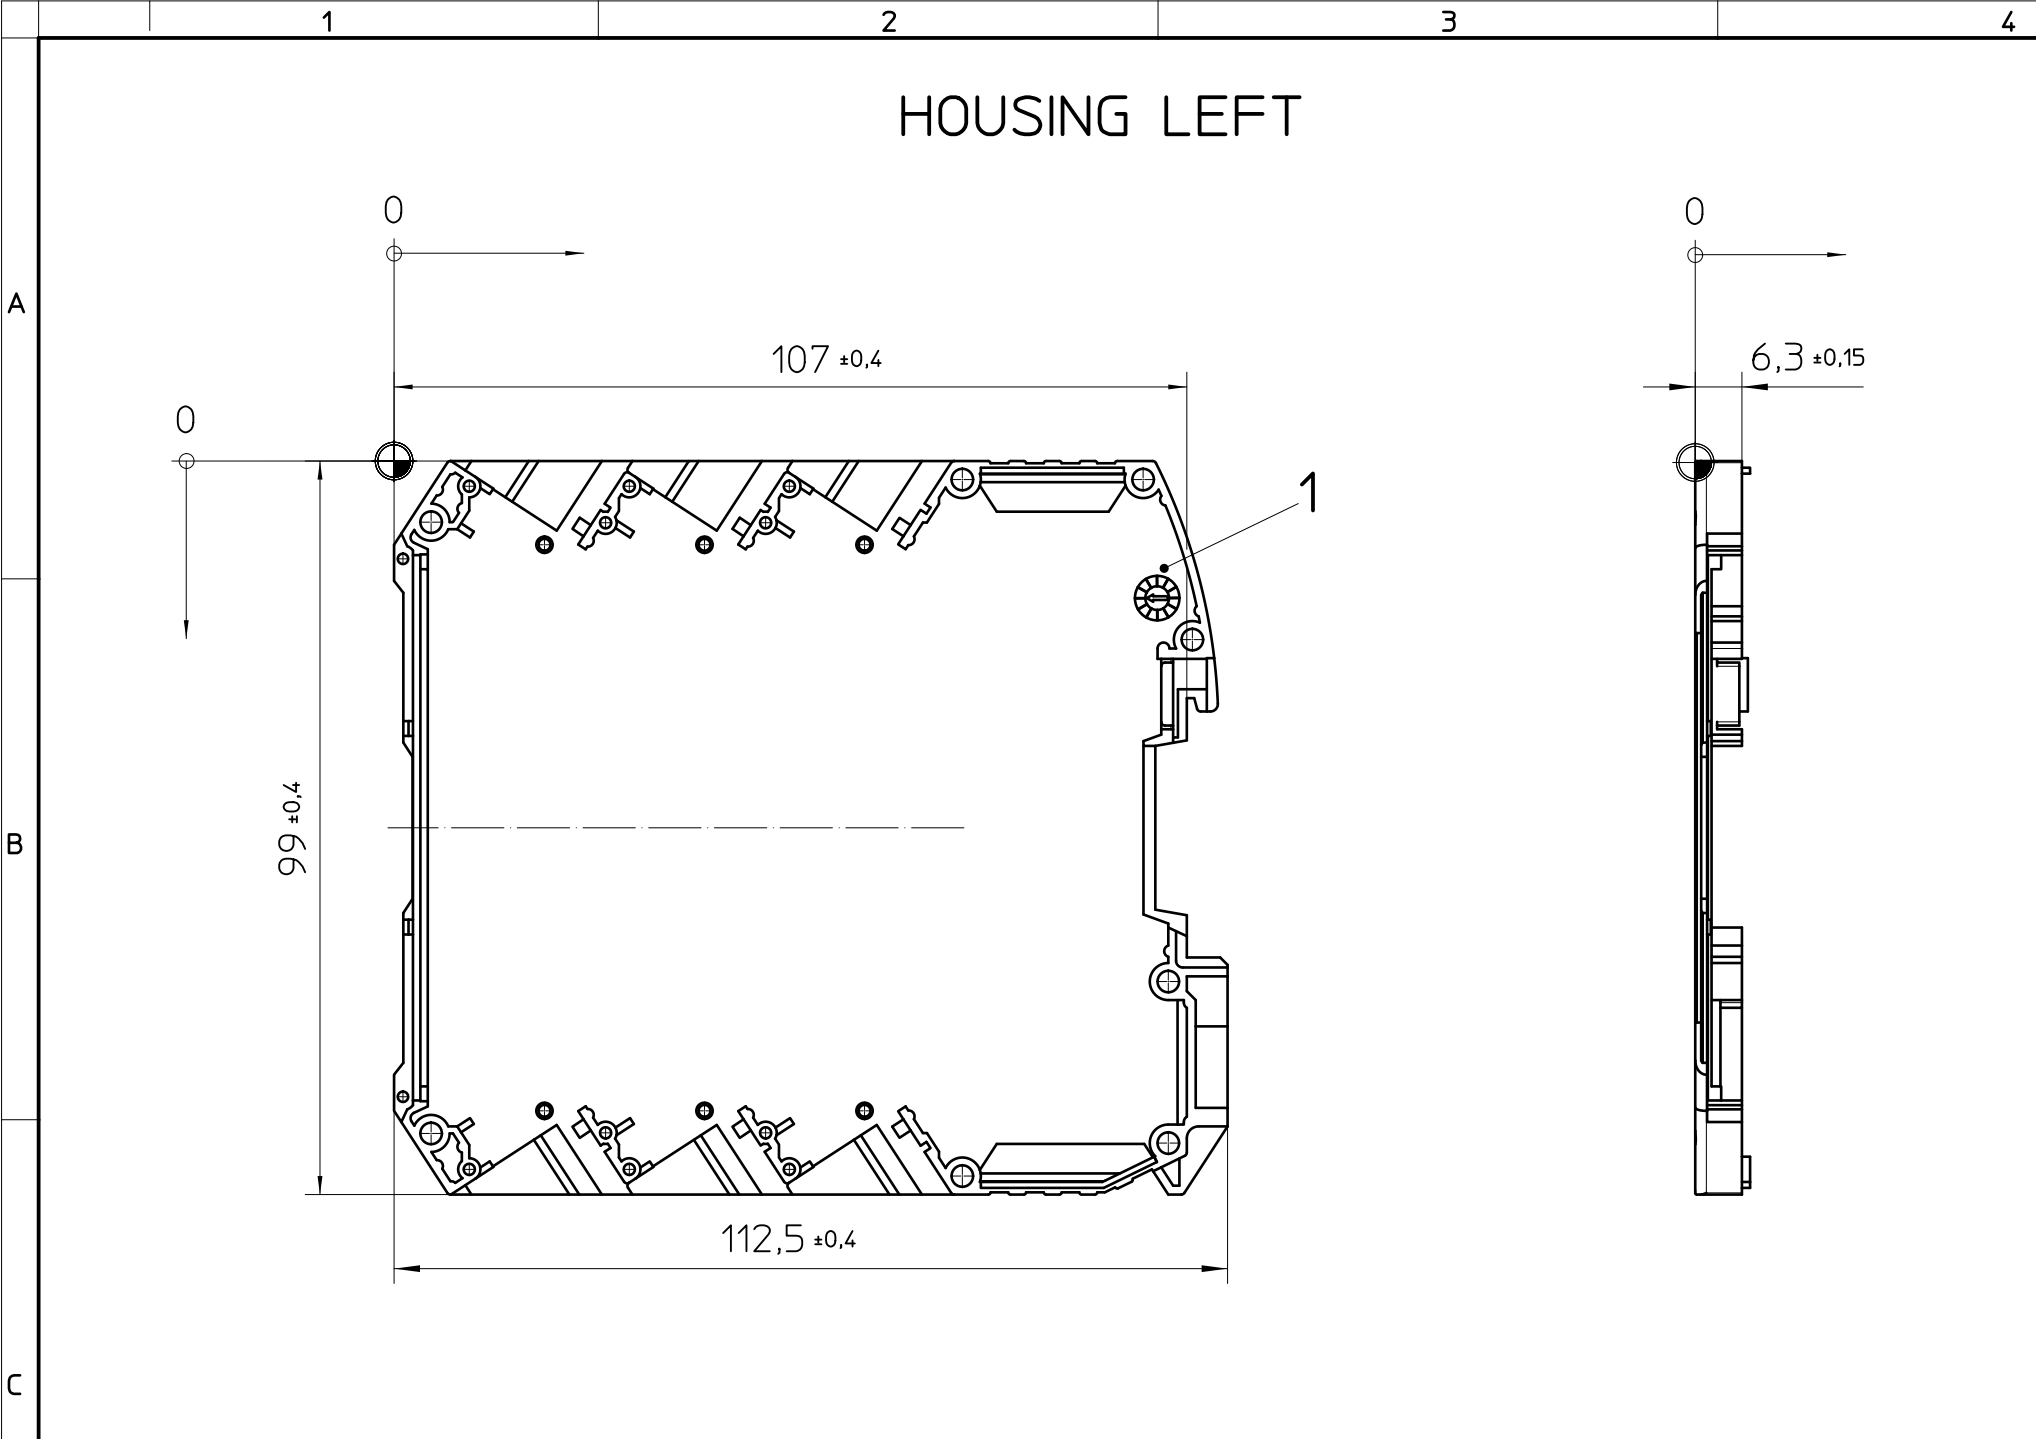

HOUSING RIGHT

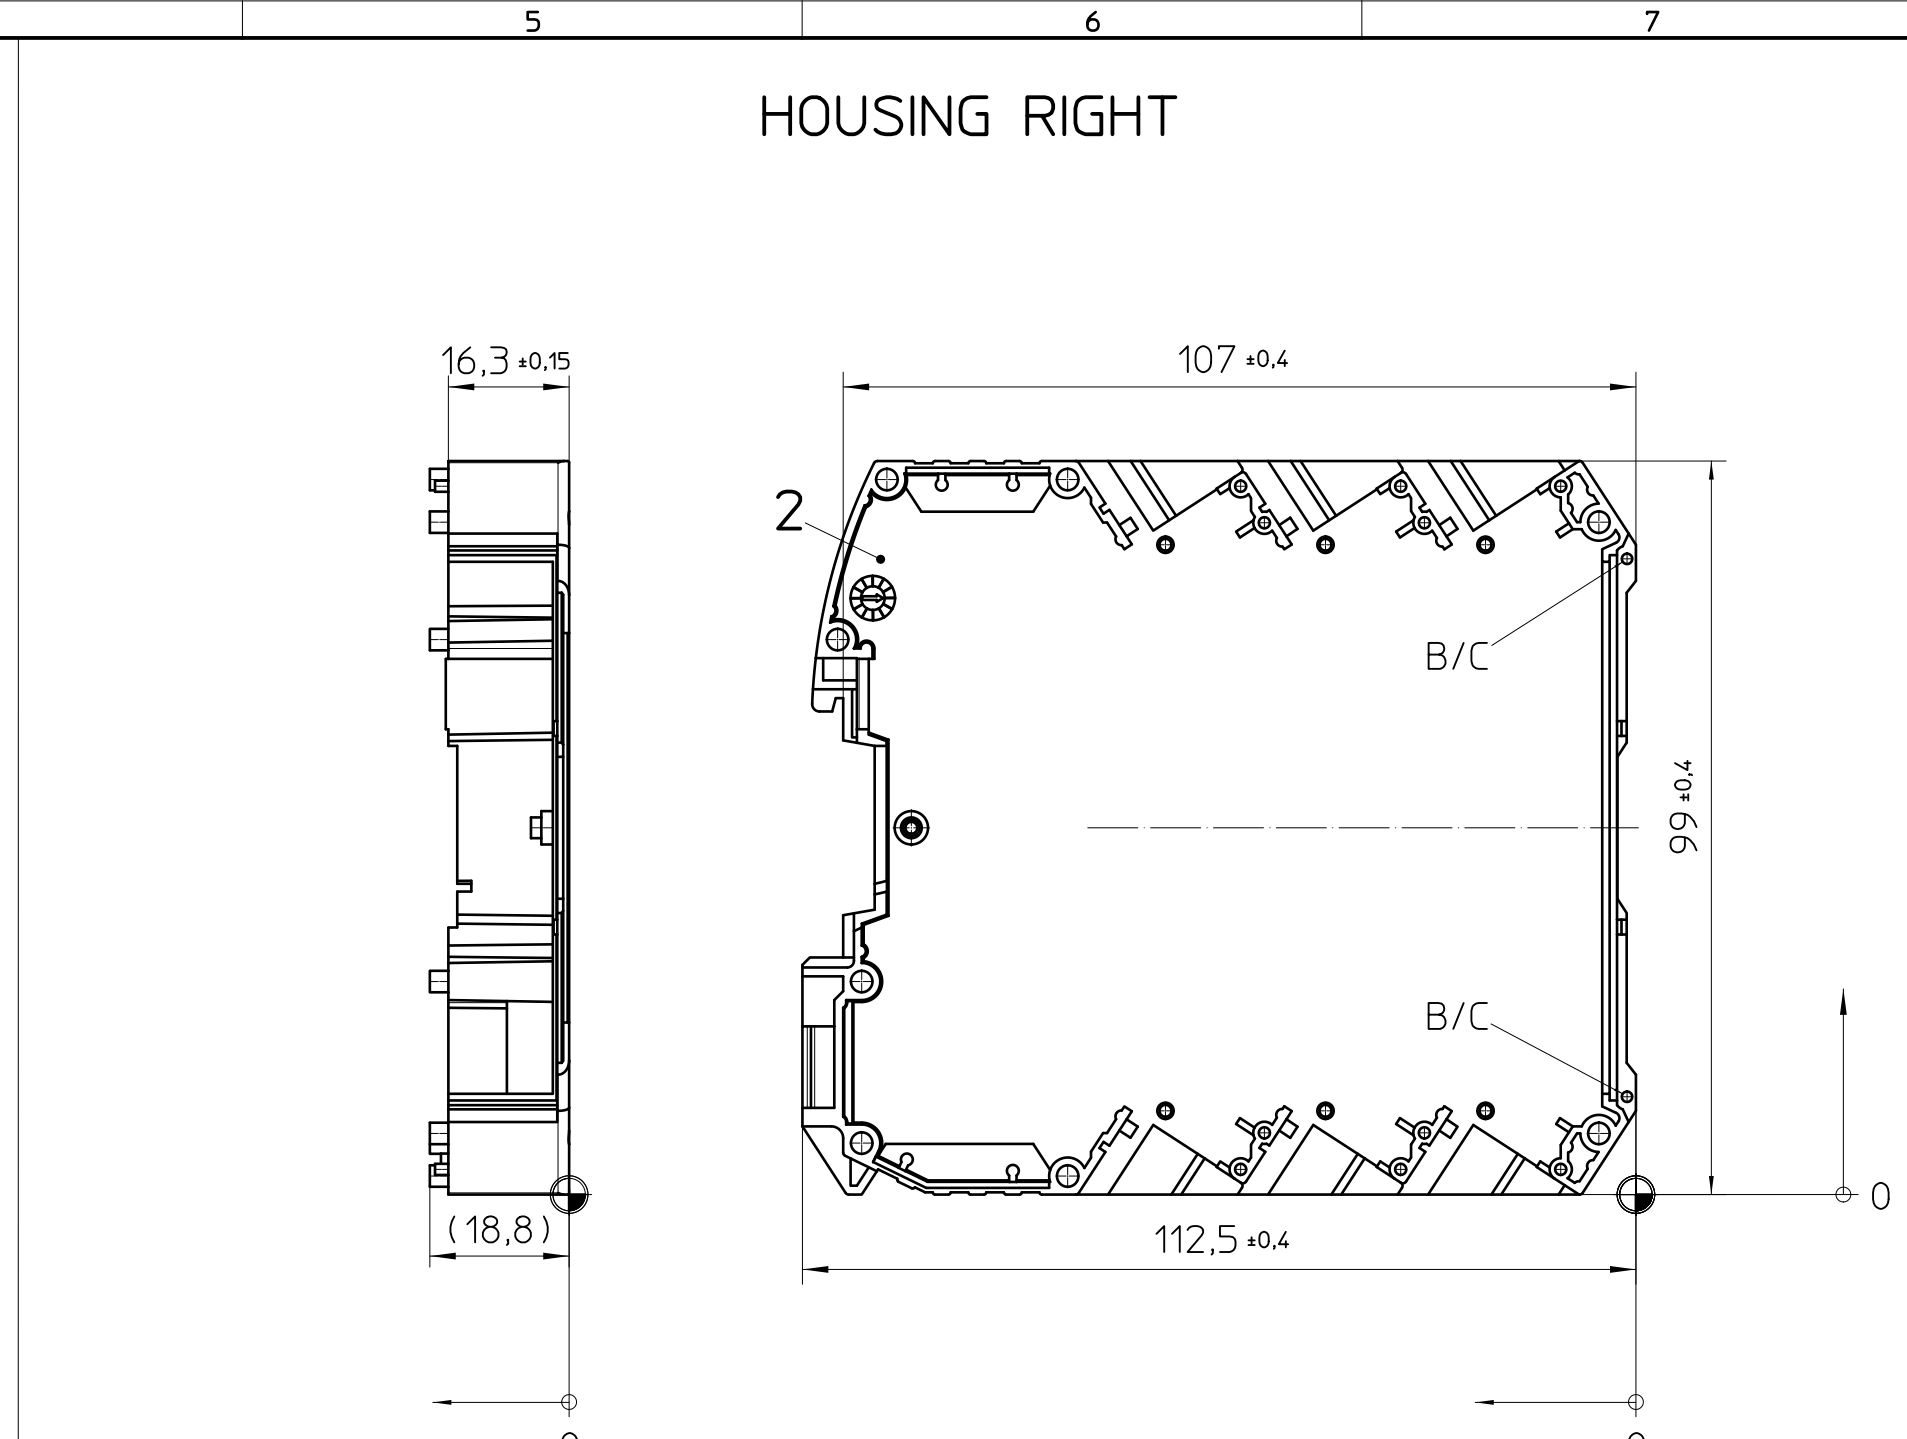

Assembly example: ME MAX 45 G 3-3

45.2 ± 0.6 / -0.5

107 ± 0.6 / -0.4

99 ± 0.5 / -0.4

(113.65)

A

H

A-A

2.3 ± 0.1

20.85 ± 0.2

16.05 ± 0.15

LEVEL

3

2

1


PCB

1 / 2

height

width

depth

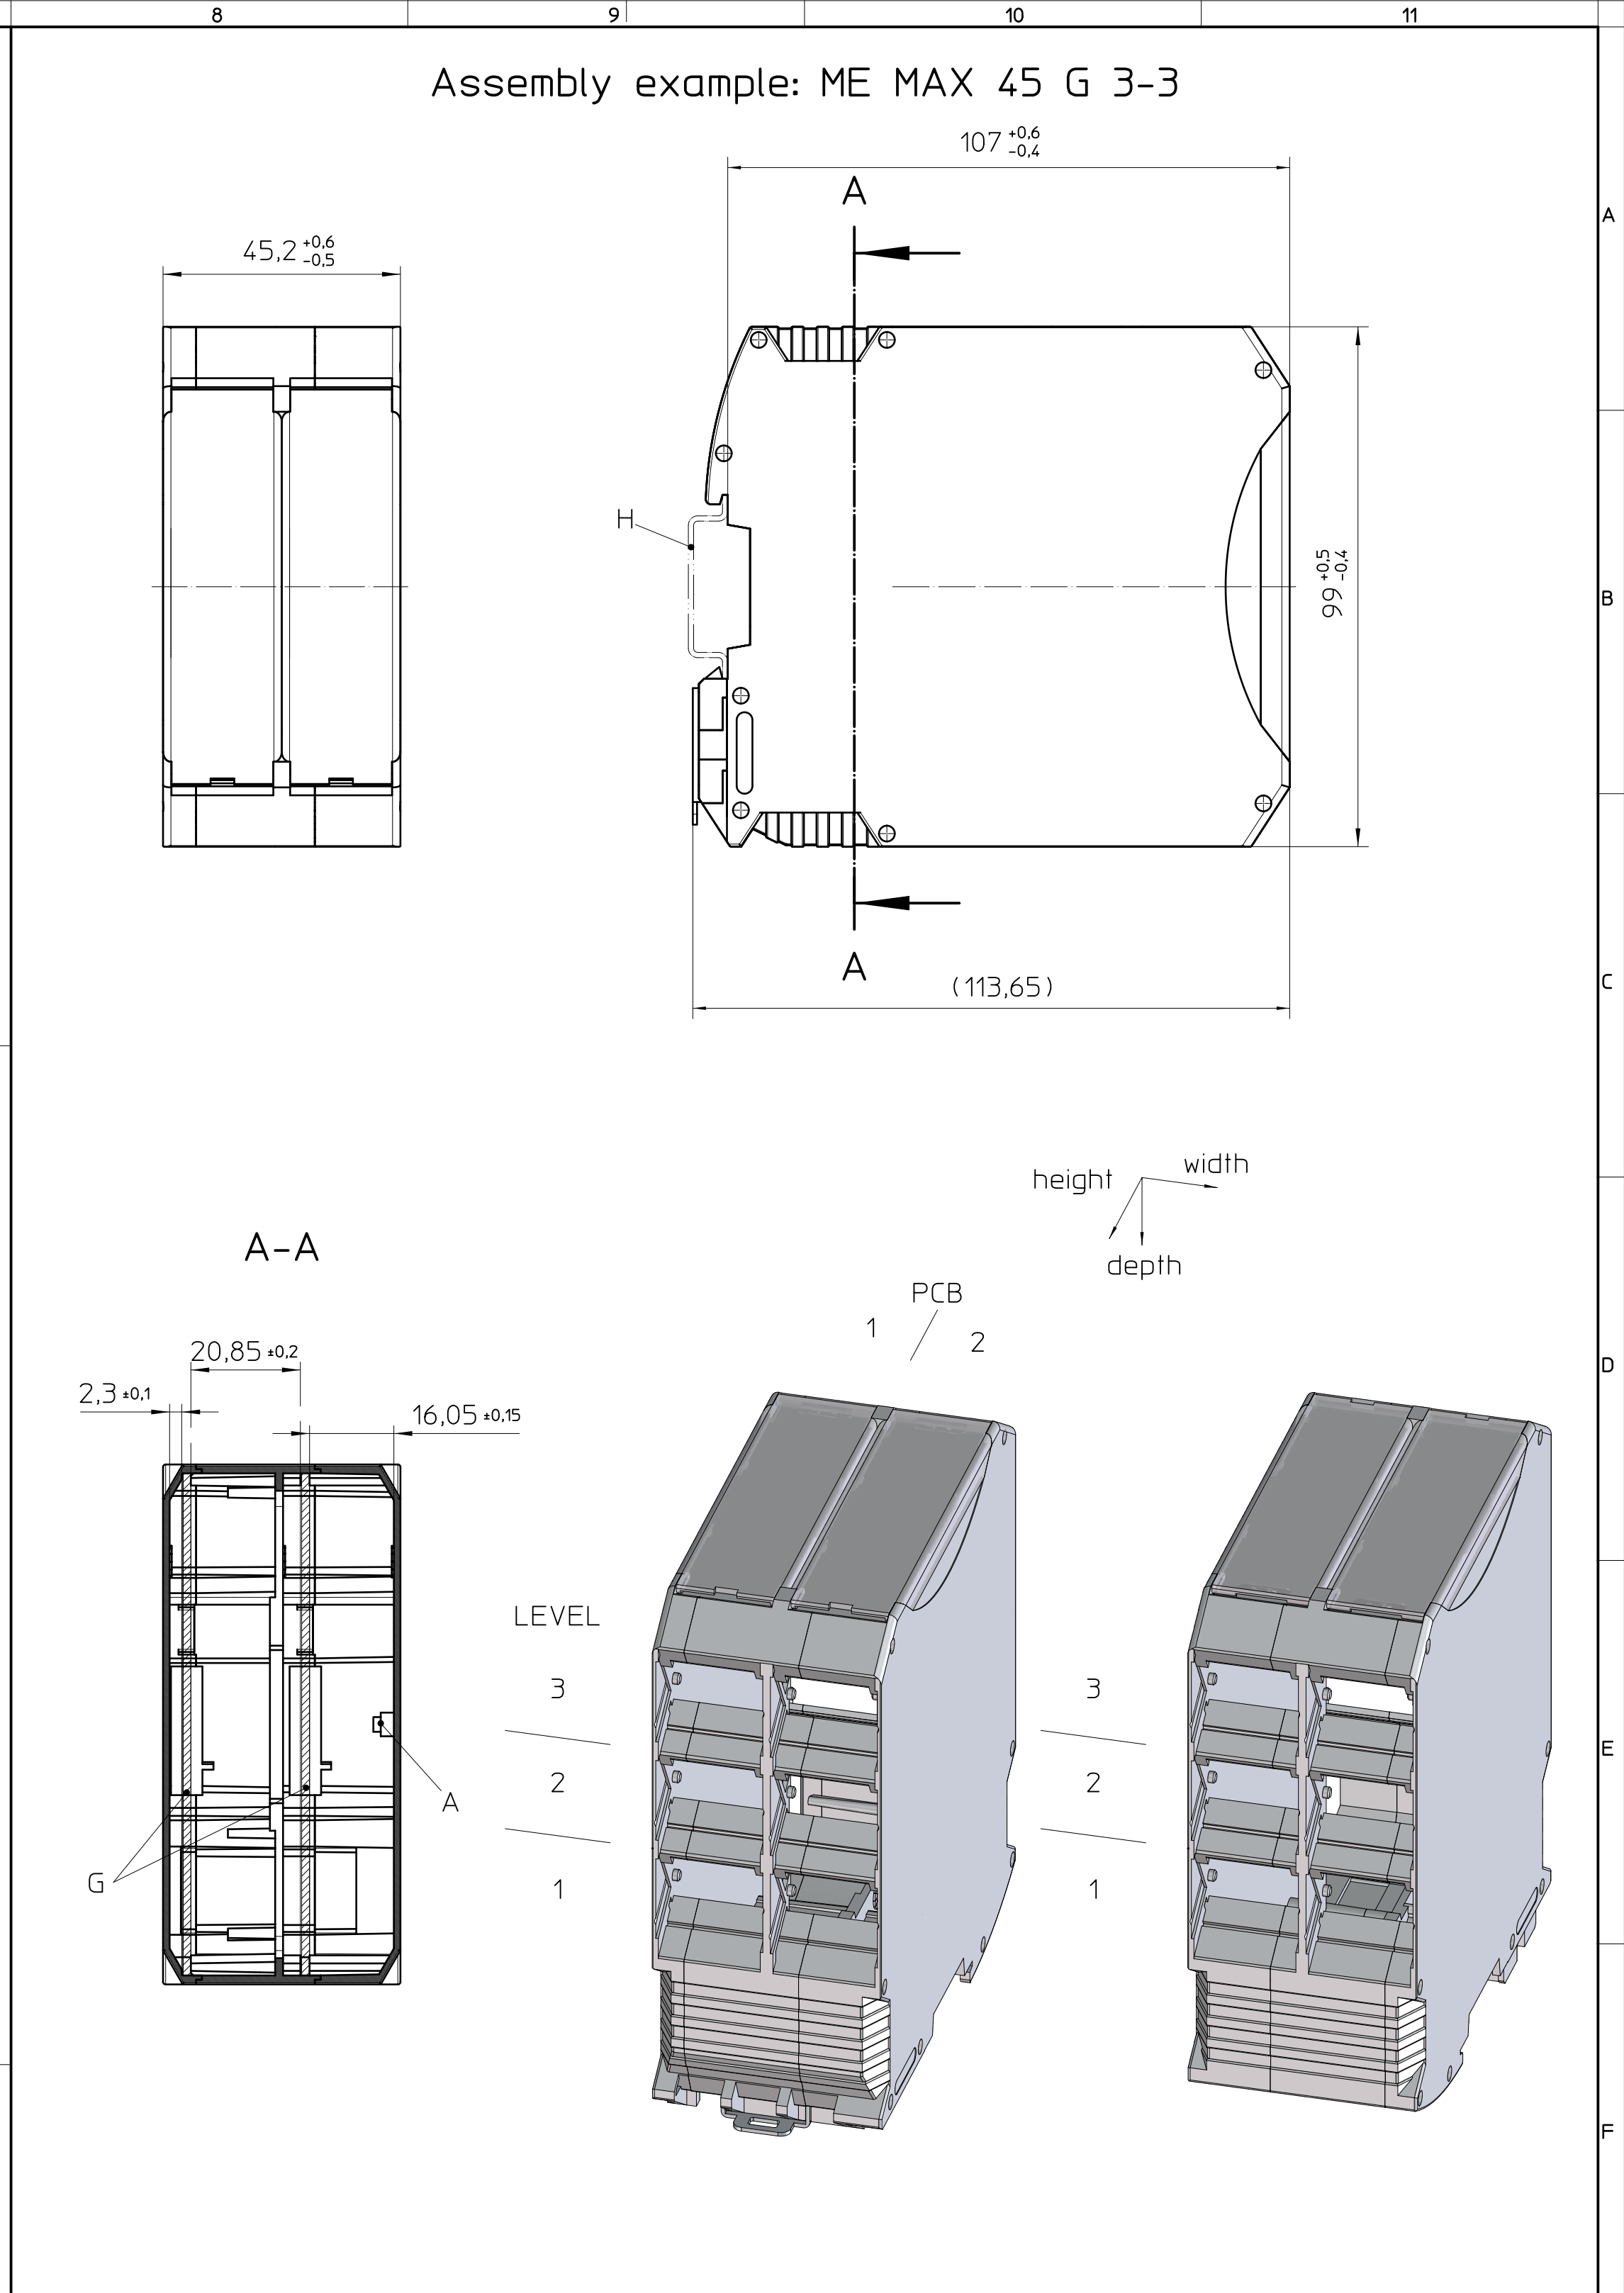

HINGED COVER

Transfer or duplication of this communication of its content is prohibited in case of patent law.

Wiedergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Weiterleitung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Verlagsverletzung vorbehalten.

B-B

21,1 ± 0,2

B

5

B

C

D

0

0


5,5 ± 0,12

75,25 ± 0,35

0

0

22,6 ± 0,2

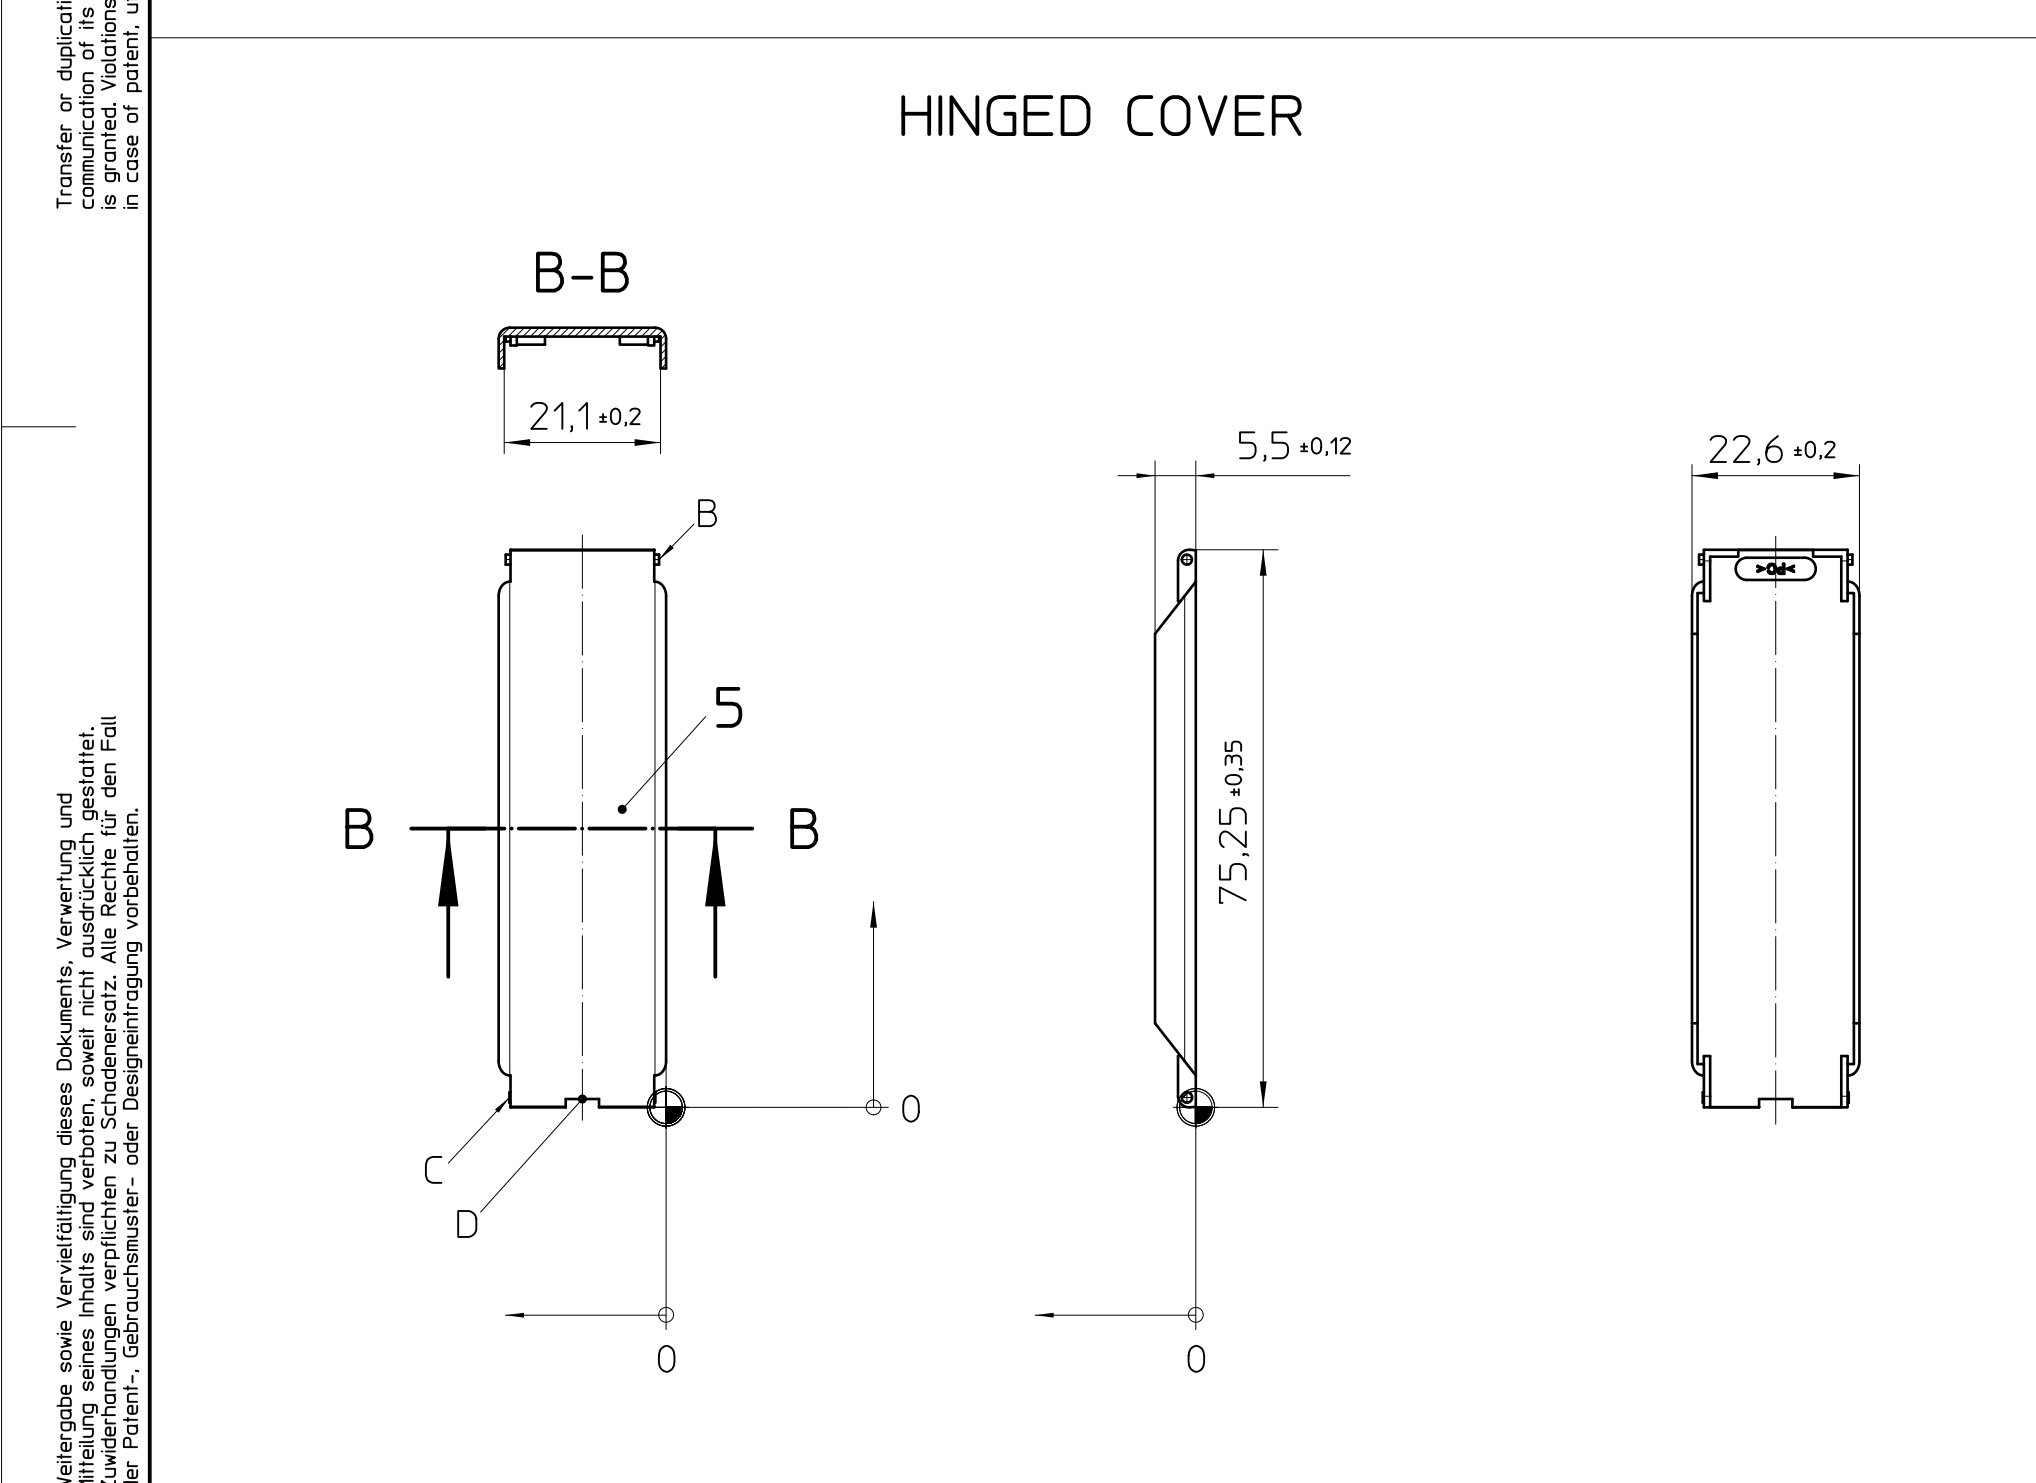

FOOT CATCH


2:1

6,5 $\pm 0,25$

6

30 $\pm 0,35$

17,5 $\pm 0,25$

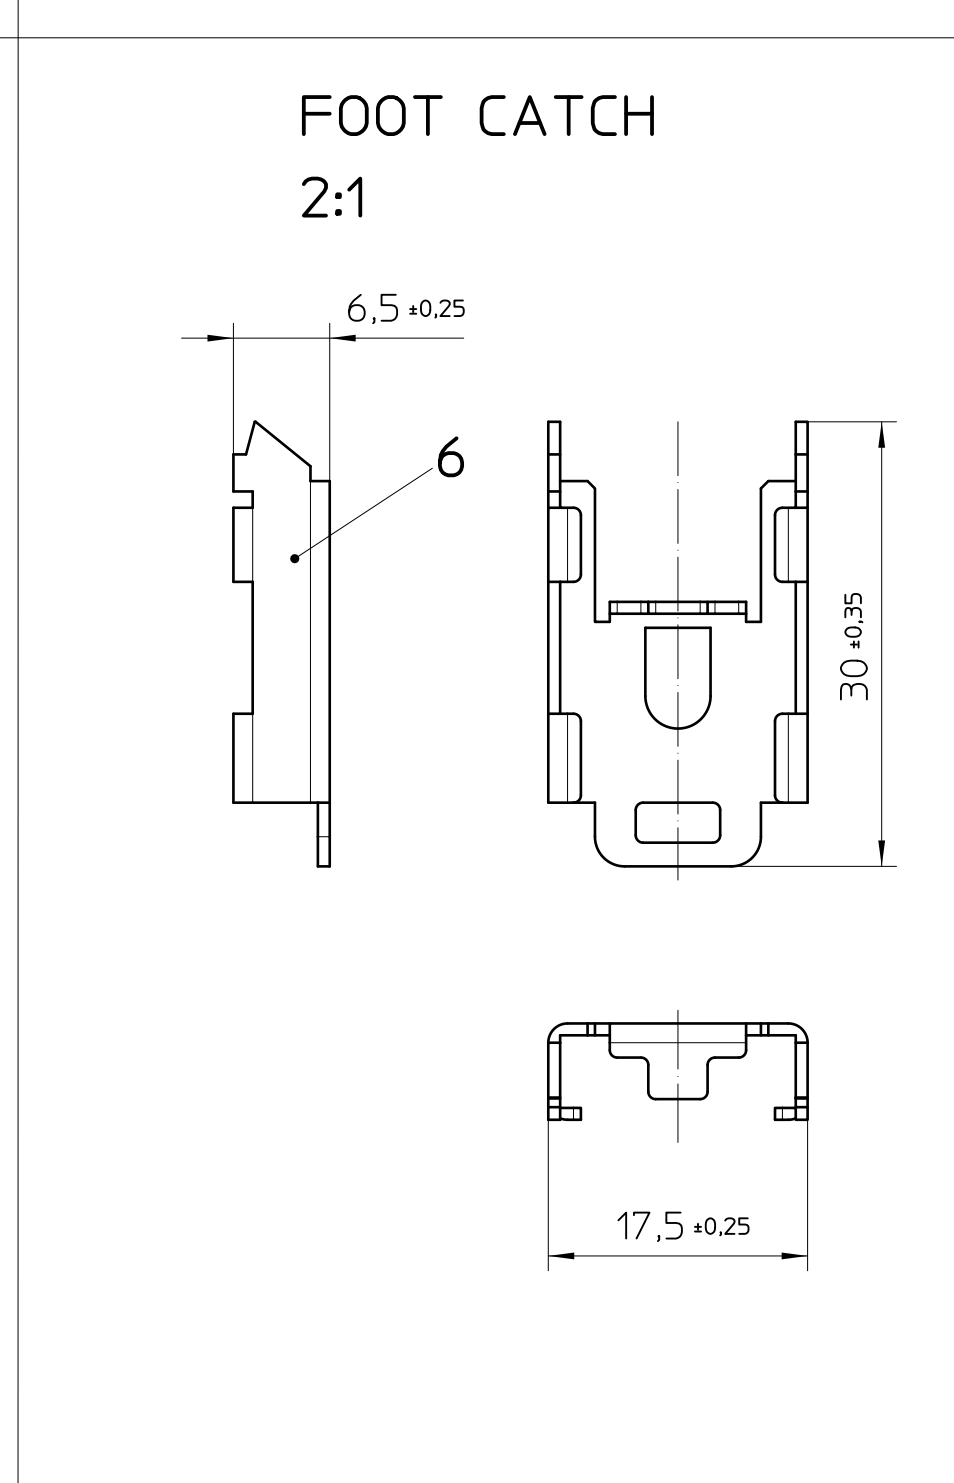


SPRING

5:1

Technical drawing of a helical spring. The drawing shows a side view of the spring with the following dimensions:

- Outer diameter: $\varnothing 4 \pm 0.15$
- Length: 13 ± 0.35
- A label **7** points to the end of the spring.

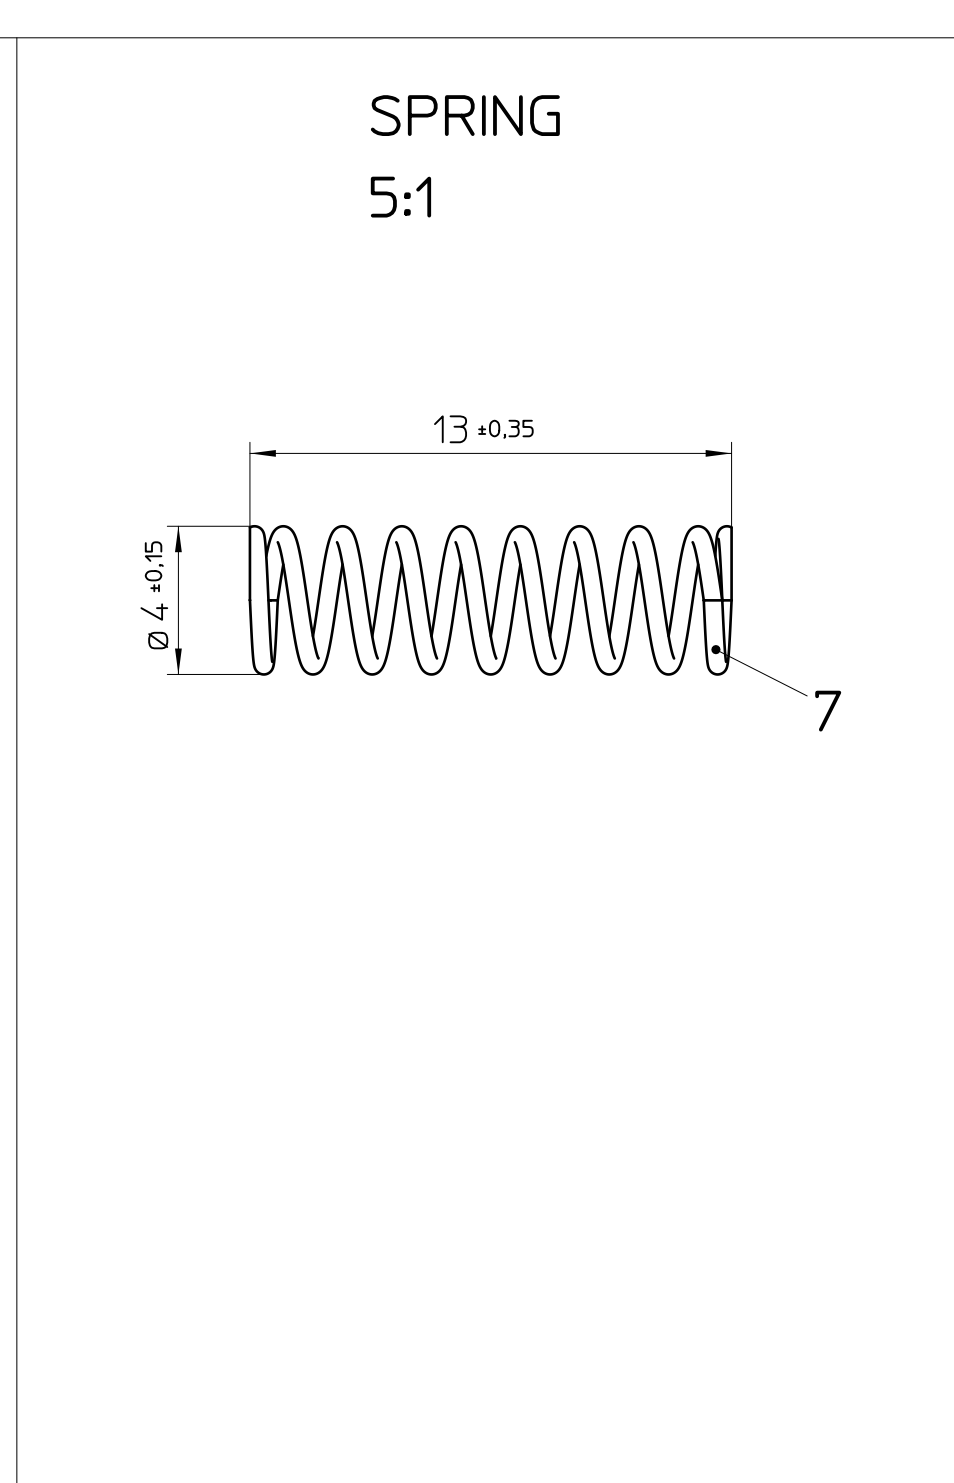

General Information - Simplified representation, exemplary shown in gray. - Document excluded from change process - Dimensions in millimeters [mm], angles in degrees [°] - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2. - PA plastic parts with about 2% (% by weight) moisture content. -  Workpiece zero point for mechanical processing - Tolerances for mechanical processing are ISO 2768-mK - Tolerances for printing DIN ISO 2768-m - Machining radii min. R1, further on request - Web: www.phoenixcontact.com																																			
Additional information A. Attachment point for the optional PCB B. Pivot bearing HINGED COVER C. Locking HINGED COVER D. Notch for locking release, by screw driver E. Exposed side F. Inner side G. Recommended PCB outline on H. Mounting rail like EN 60715; TH 35-7.5 or mounting rail TH 35-15x15 similar to EN 60715																																			
<table border="1"> <thead> <tr> <th>Pos.</th><th>QTY</th><th>Description</th><th>Material</th></tr> </thead> <tbody> <tr> <td>1</td><td>1</td><td>HOUSING LEFT</td><td>PA</td></tr> <tr> <td>2</td><td>1</td><td>HOUSING RIGHT</td><td>PA</td></tr> <tr> <td>3</td><td>1</td><td>HOUSING MIDDLE</td><td>PA</td></tr> <tr> <td>4</td><td>2</td><td>FRONT PLATE</td><td>PA</td></tr> <tr> <td>5</td><td>2</td><td>HINGED COVER</td><td>PC</td></tr> <tr> <td>6</td><td>1</td><td>FOOT CATCH</td><td>STL</td></tr> <tr> <td>7</td><td>1</td><td>SPRING</td><td>STL</td></tr> </tbody> </table>				Pos.	QTY	Description	Material	1	1	HOUSING LEFT	PA	2	1	HOUSING RIGHT	PA	3	1	HOUSING MIDDLE	PA	4	2	FRONT PLATE	PA	5	2	HINGED COVER	PC	6	1	FOOT CATCH	STL	7	1	SPRING	STL
Pos.	QTY	Description	Material																																
1	1	HOUSING LEFT	PA																																
2	1	HOUSING RIGHT	PA																																
3	1	HOUSING MIDDLE	PA																																
4	2	FRONT PLATE	PA																																
5	2	HINGED COVER	PC																																
6	1	FOOT CATCH	STL																																
7	1	SPRING	STL																																
		DIN A1	<table border="1"> <tr> <td>document-No. / RI</td><td>date</td><td>scale</td></tr> <tr> <td>00877062 / 03</td><td>05.11.2025</td><td>1:1</td></tr> </table>	document-No. / RI	date	scale	00877062 / 03	05.11.2025	1:1																										
document-No. / RI	date	scale																																	
00877062 / 03	05.11.2025	1:1																																	
		document-No. 2713926	document-type TECDOC 2D_Productdrawing																																
page 1 of 1		description ME MAX 45 G 3-3 KMGY																																	

General Information - Simplified representation, exemplary shown in gray. - Document excluded from change process - Dimensions in millimeters [mm], angles in degrees [°] - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2. - PA plastic parts with about 2% (% by weight) moisture content. -  Workpiece zero point for mechanical processing - Tolerances for mechanical processing are ISO 2768-mK - Tolerances for printing DIN ISO 2768-m - Machining radii min. R1, further on request - Web: www.phoenixcontact.com			
Additional information A. Attachment point for the optional PCB B. Pivot bearing HINGED COVER C. Locking HINGED COVER D. Notch for locking release, by screw driver E. Exposed side F. Inner side G. Recommended PCB outline on H. Mounting rail like EN 60715; TH 35-7.5 or mounting rail TH 35-15x15 similar to EN 60715			
		DIN A1	document-No. / RI 00877062 / 03
		ident.-No. 2713926	document-type TECD0C_2D_Productdrawing
page 1 of 1		description ME MAX 45 G 3-3 KMGY	

General Information - Simplified representation, exemplary shown in gray. - Document excluded from change process - Dimensions in millimeters [mm], angles in degrees [°] - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2. - PA plastic parts with about 2% (% by weight) moisture content. -  Workpiece zero point for mechanical processing - Tolerances for mechanical processing are ISO 2768-mK - Tolerances for printing DIN ISO 2768-m - Machining radii min. R1, further on request - Web: www.phoenixcontact.com			
Additional information A. Attachment point for the optional PCB B. Pivot bearing HINGED COVER C. Locking HINGED COVER D. Notch for locking release, by screw driver E. Exposed side F. Inner side G. Recommended PCB outline on H. Mounting rail like EN 60715; TH 35-7.5 or mounting rail TH 35-15x15 similar to EN 60715			
		DIN A1	document-No. / RI 00877062 / 03
		ident.-No. 2713926	document-type TECD0C_2D_Productdrawing
page 1 of 1		description ME MAX 45 G 3-3 KMGY	

General Information - Simplified representation, exemplary shown in gray. - Document excluded from change process - Dimensions in millimeters [mm], angles in degrees [°] - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2. - PA plastic parts with about 2% (% by weight) moisture content. -  Workpiece zero point for mechanical processing - Tolerances for mechanical processing are ISO 2768-mK - Tolerances for printing DIN ISO 2768-m - Machining radii min. R1, further on request - Web: www.phoenixcontact.com			
Additional information A. Attachment point for the optional PCB B. Pivot bearing HINGED COVER C. Locking HINGED COVER D. Notch for locking release, by screw driver E. Exposed side F. Inner side G. Recommended PCB outline on H. Mounting rail like EN 60715; TH 35-7.5 or mounting rail TH 35-15x15 similar to EN 60715			
		DIN A1	document-No. / RI 00877062 / 03
		ident.-No. 2713926	document-type TECD0C_2D_Productdrawing
page 1 of 1		description ME MAX 45 G 3-3 KMGY	

weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Verbreitung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Insbesondere ist die Weitergabe oder Verwertung dieses Dokuments zum Fall von Patent-, Gebrauchsmuster- oder Designantrag vorbehalten.

weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Verbreitung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Insbesondere ist die Weitergabe oder Verwertung dieses Dokuments zum Fall von Patent-, Gebrauchsmuster- oder Designantrag vorbehalten.