



Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is obtained from Phoenix Contact. All rights reserved. In case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Den Fall der Patent-, Gebrauchsmuster- oder Designregistrations vorbehalten.


HOUSING LEFT

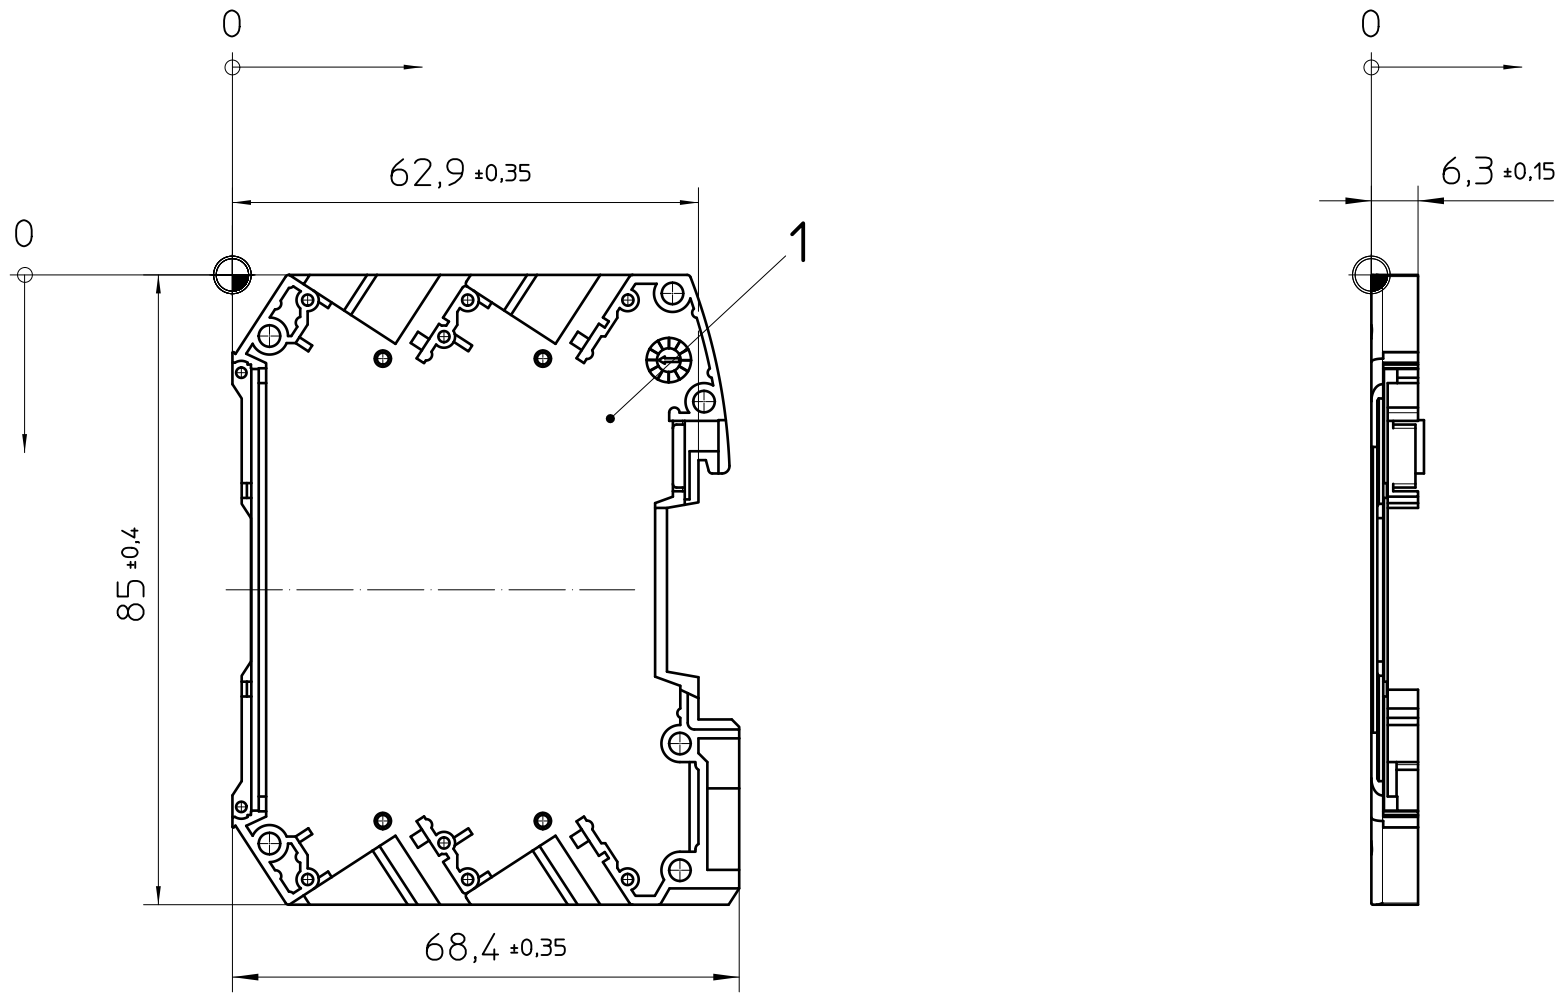


HOUSING RIGHT

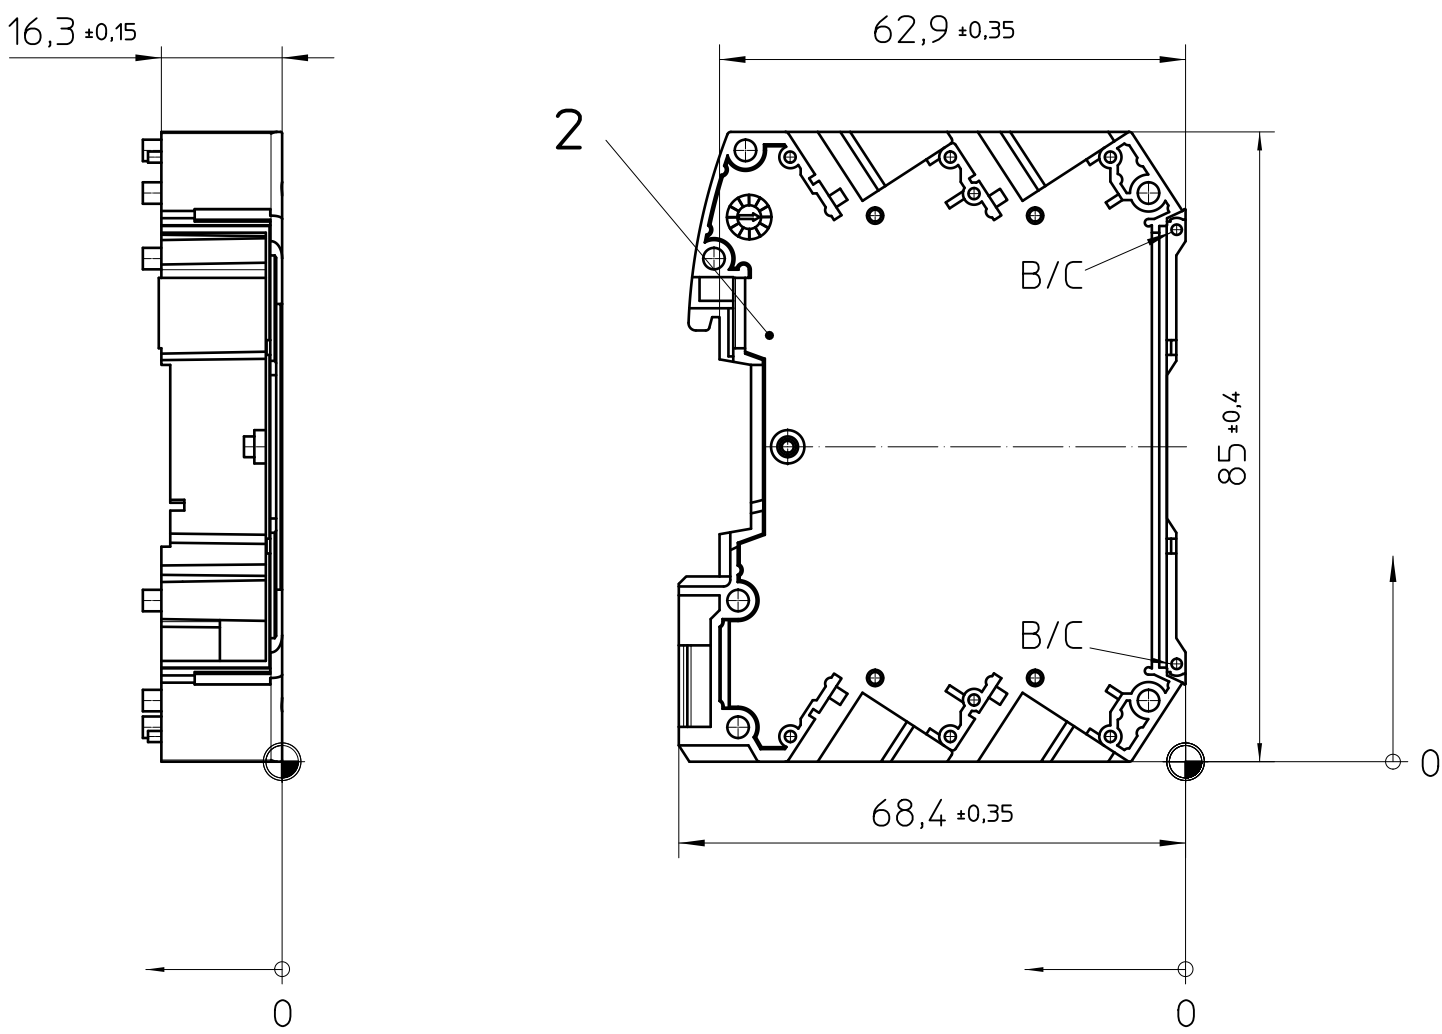




Assembly example: ME MAX 22,5 SF G 2-2

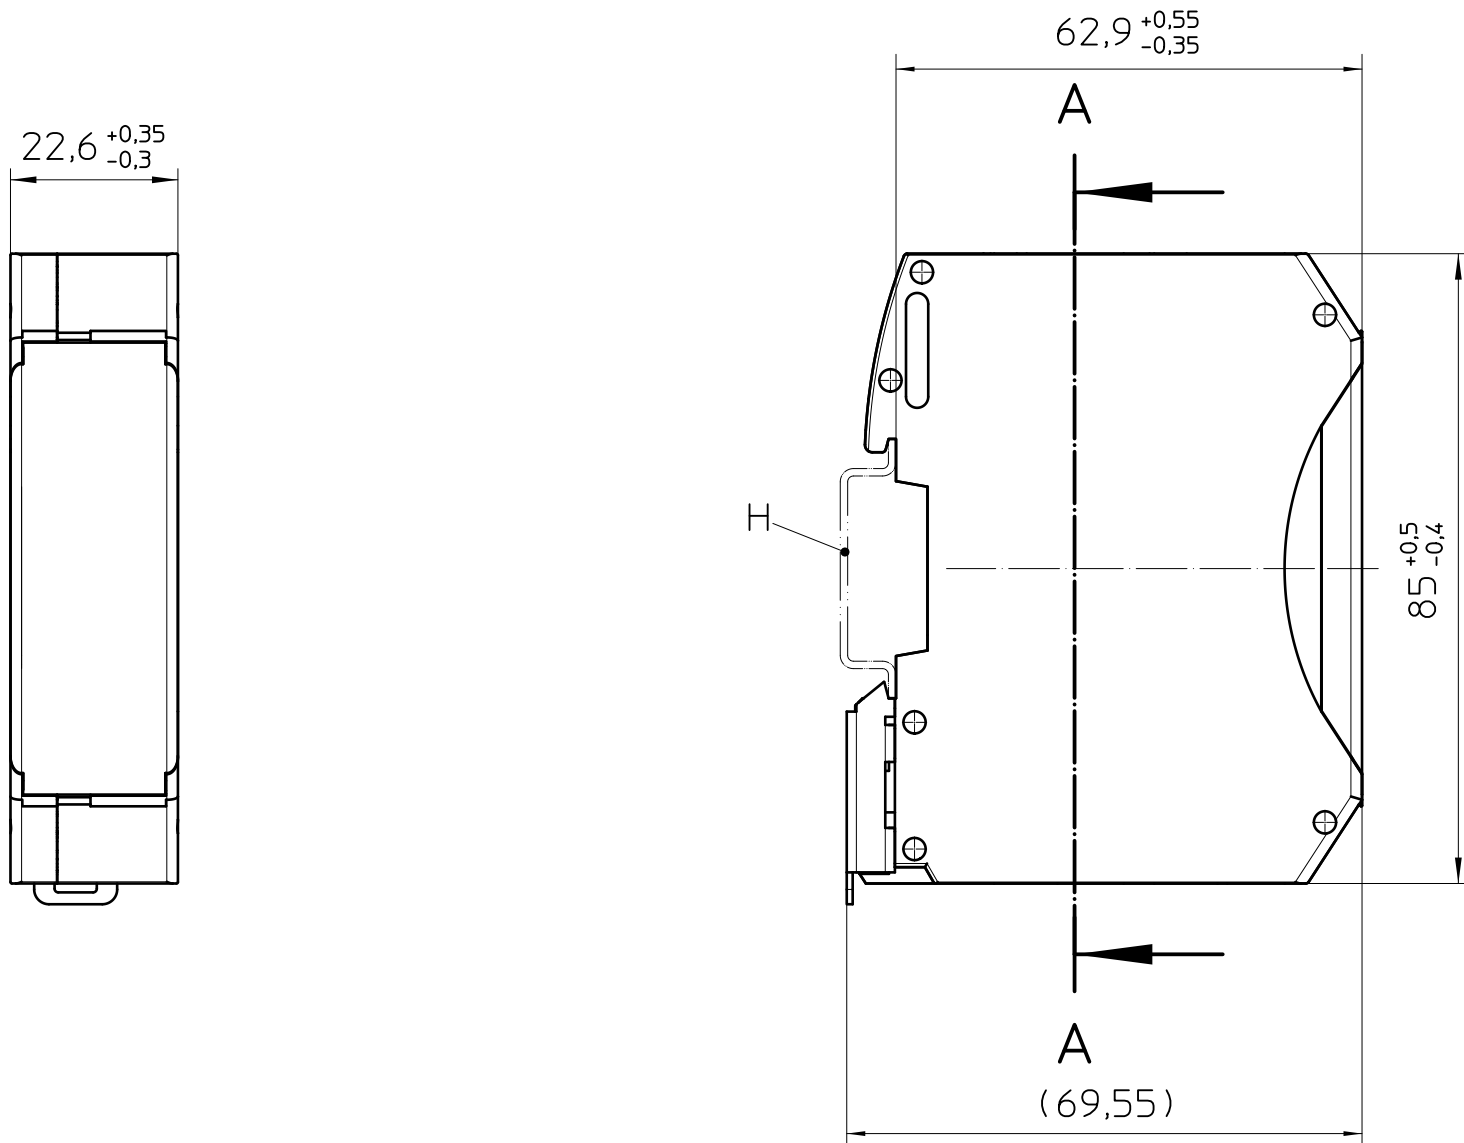


FRONT PLATE

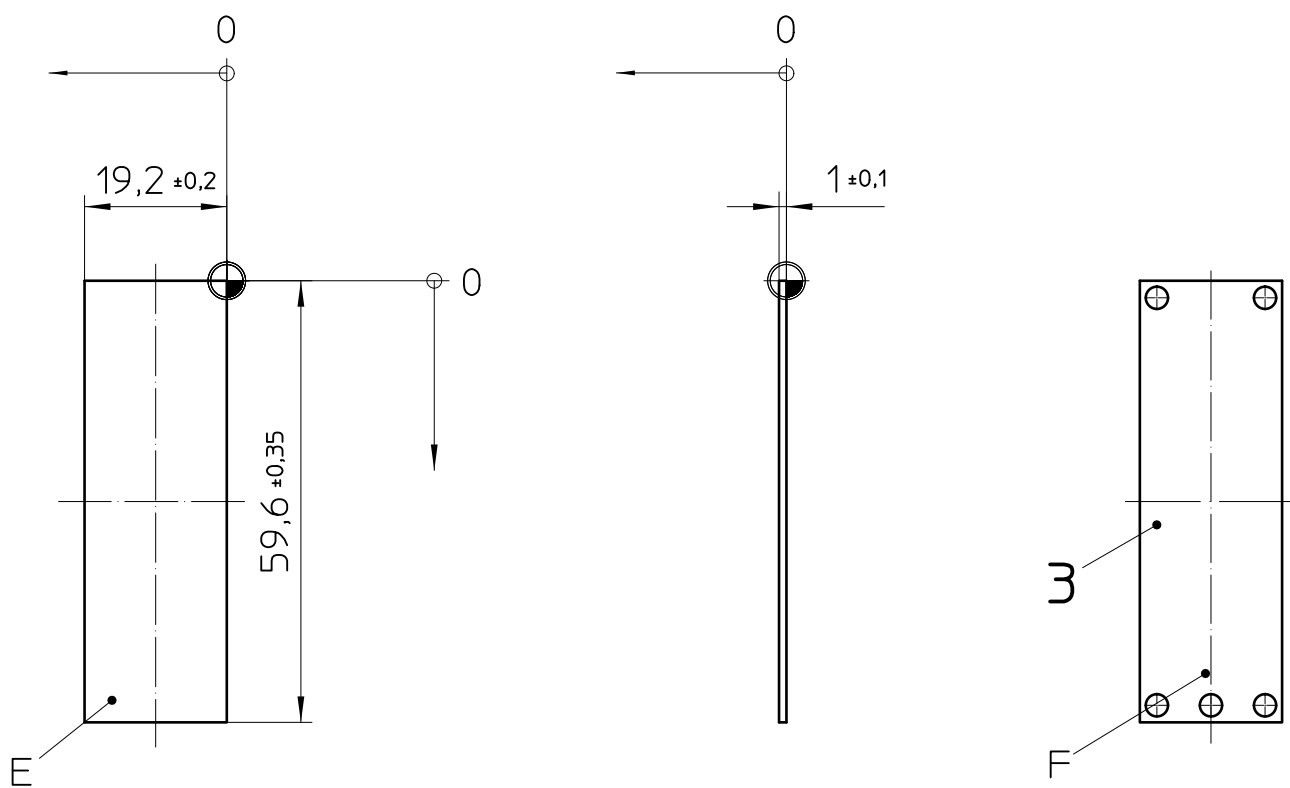


HINGED COVER

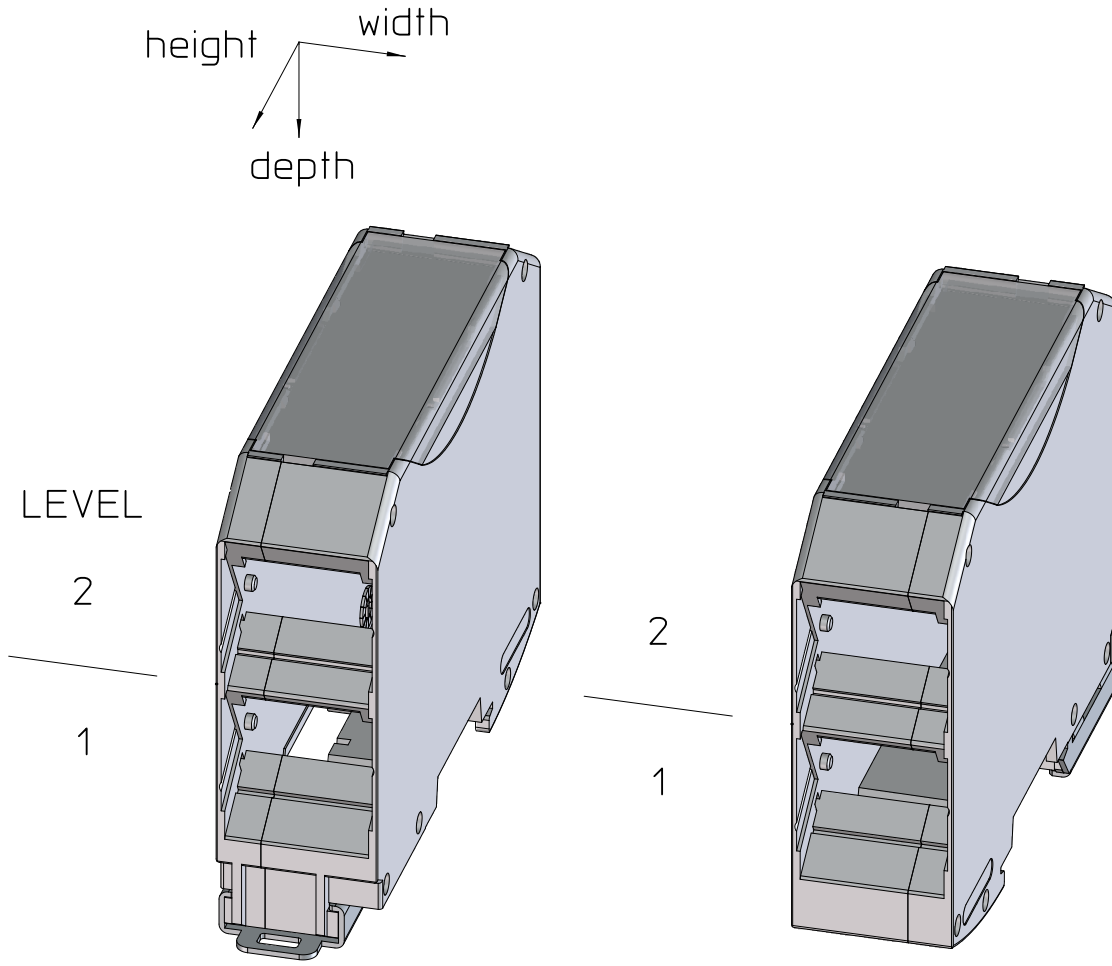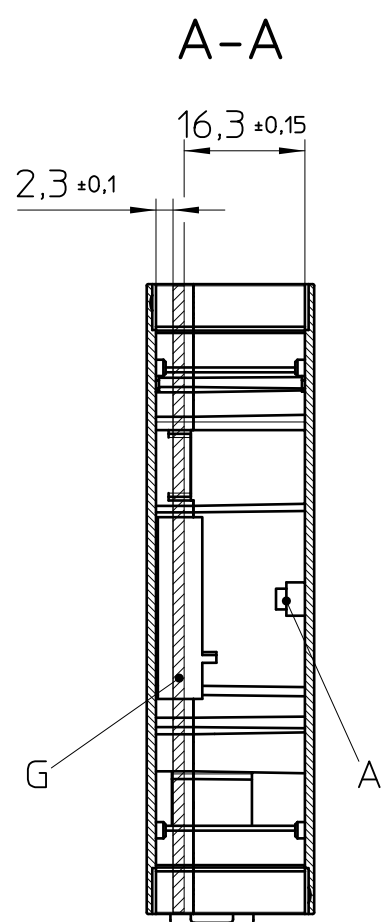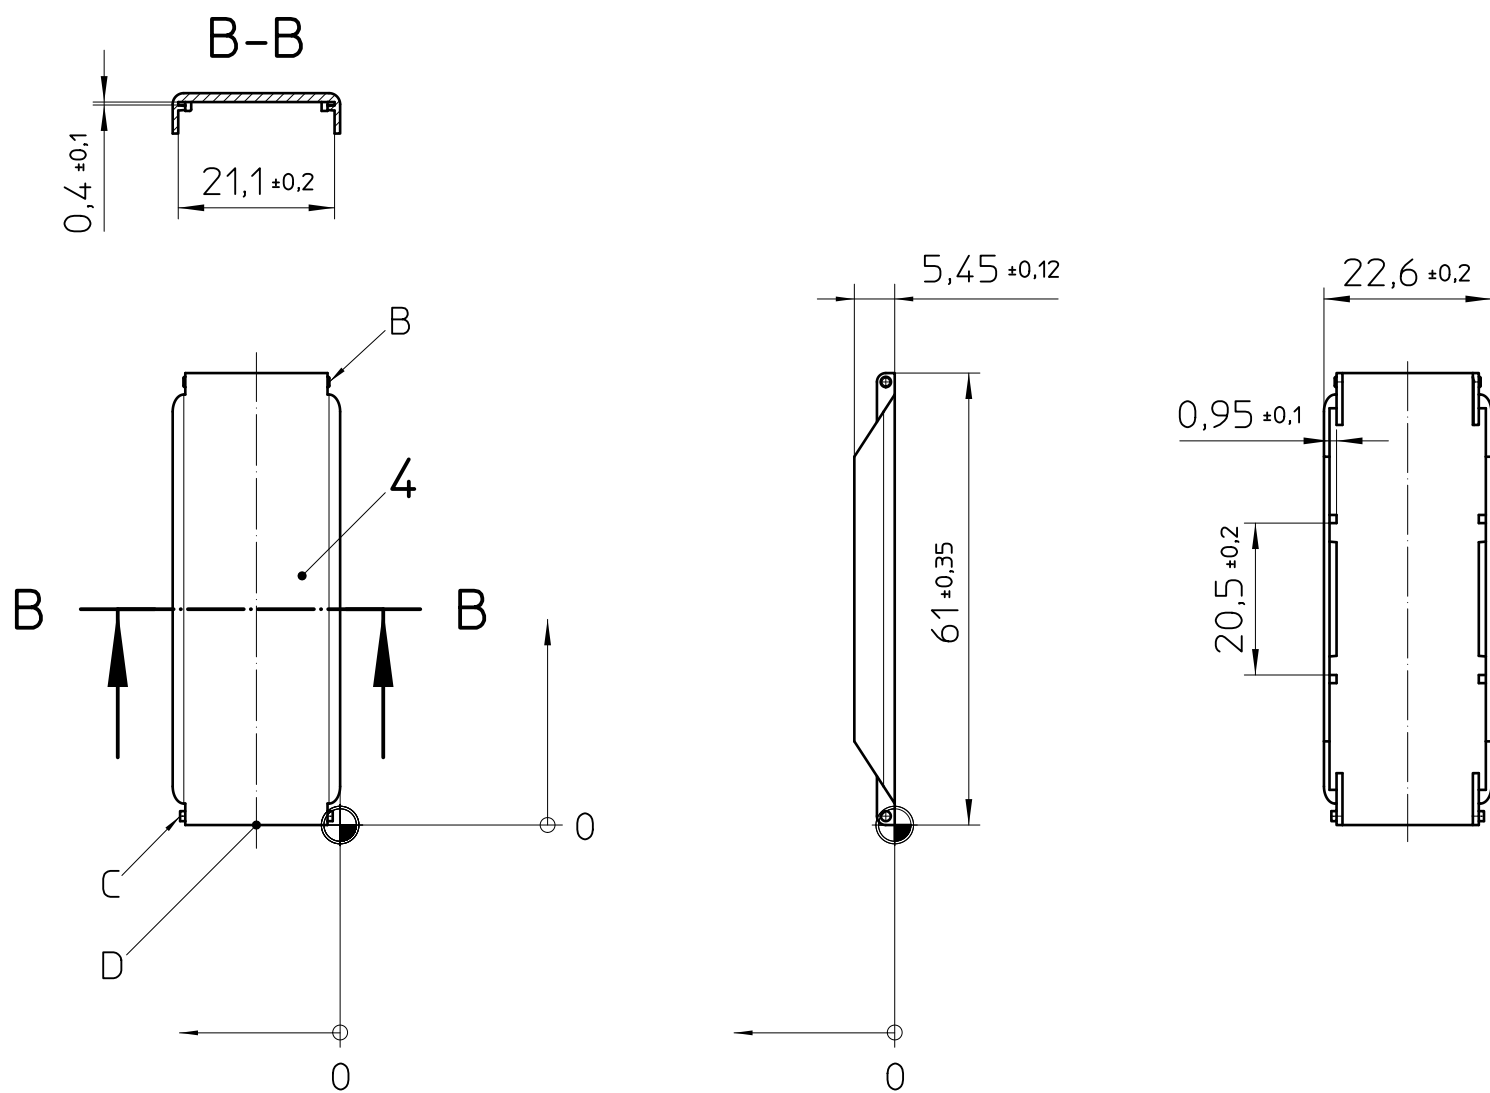

FOOT CATCH
2:1

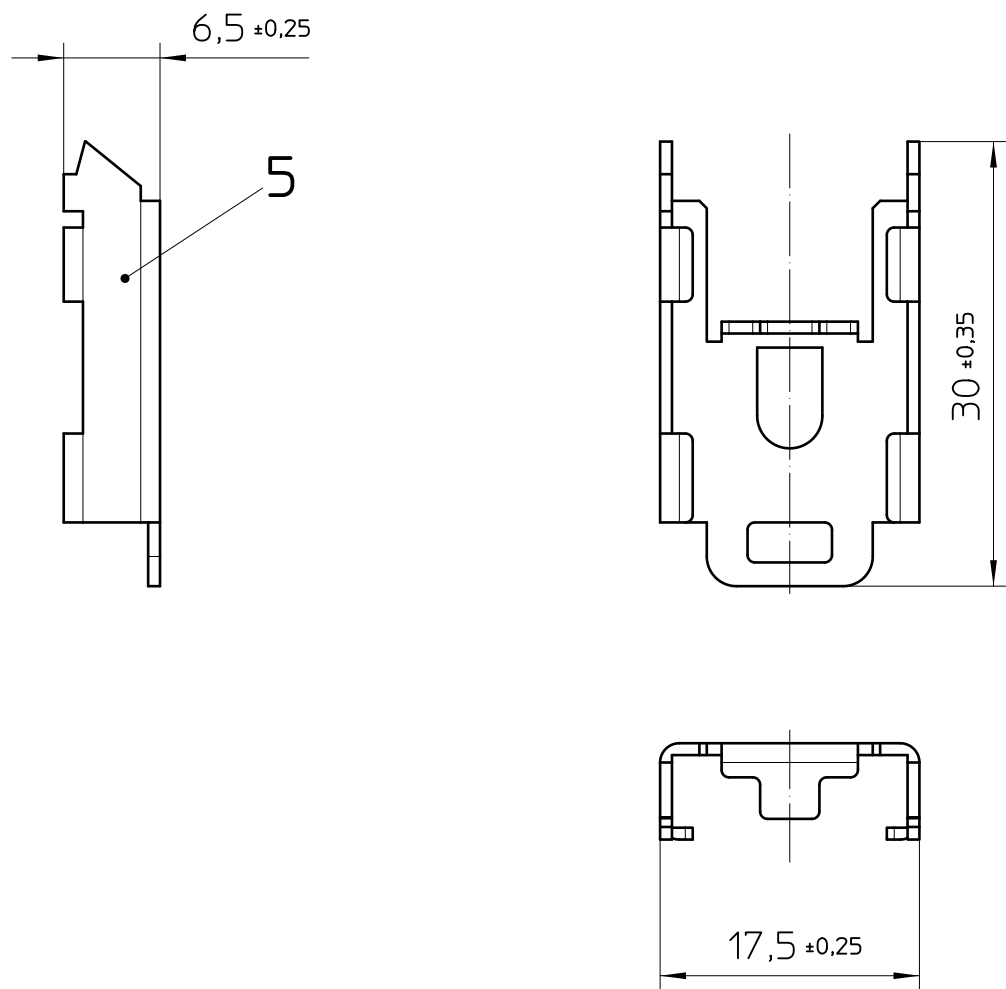

SPRING
5:1

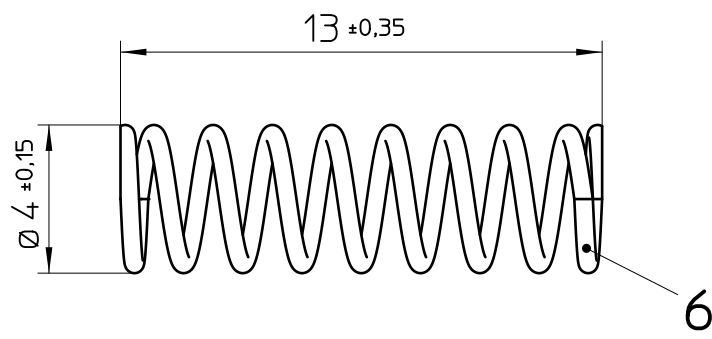

- General Information:
- Simplified representation, exemplary shown in gray.
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing are ISO 2768-mk
 - Tolerances for printing DIN ISO 2768-m
 - Machining radii min. R1, further on request
 - Web: www.phoenixcontact.com

- Additional Information:
- A. Attachment point for the optional PCB
 - B. Pivot bearing HINGED COVER
 - C. Locking HINGED COVER
 - D. Notch for locking release, by screw driver
 - E. Exposed side
 - F. Inner side
 - G. Recommended PCB outline on www.phoenixcontact.com webcode: #0512
 - H. Mounting rail like EN 60715, TH 35-7,5 or mounting rail similar to EN 60715, TH 35-15x1,5

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	HOUSING LEFT	PA
2	1	HOUSING RIGHT	PA
3	1	FRONT PLATE	PA
4	1	HINGED COVER	PC
5	1	FOOT CATCH	STL
6	1	SPRING	STL

DIN A1		document-No. / Ri	date	scale
00881832 / 03		2869362	05.11.2025	1:1
description		ME MAX 22,5 SF G 2-2 KMGY		
page 1	of 1			