
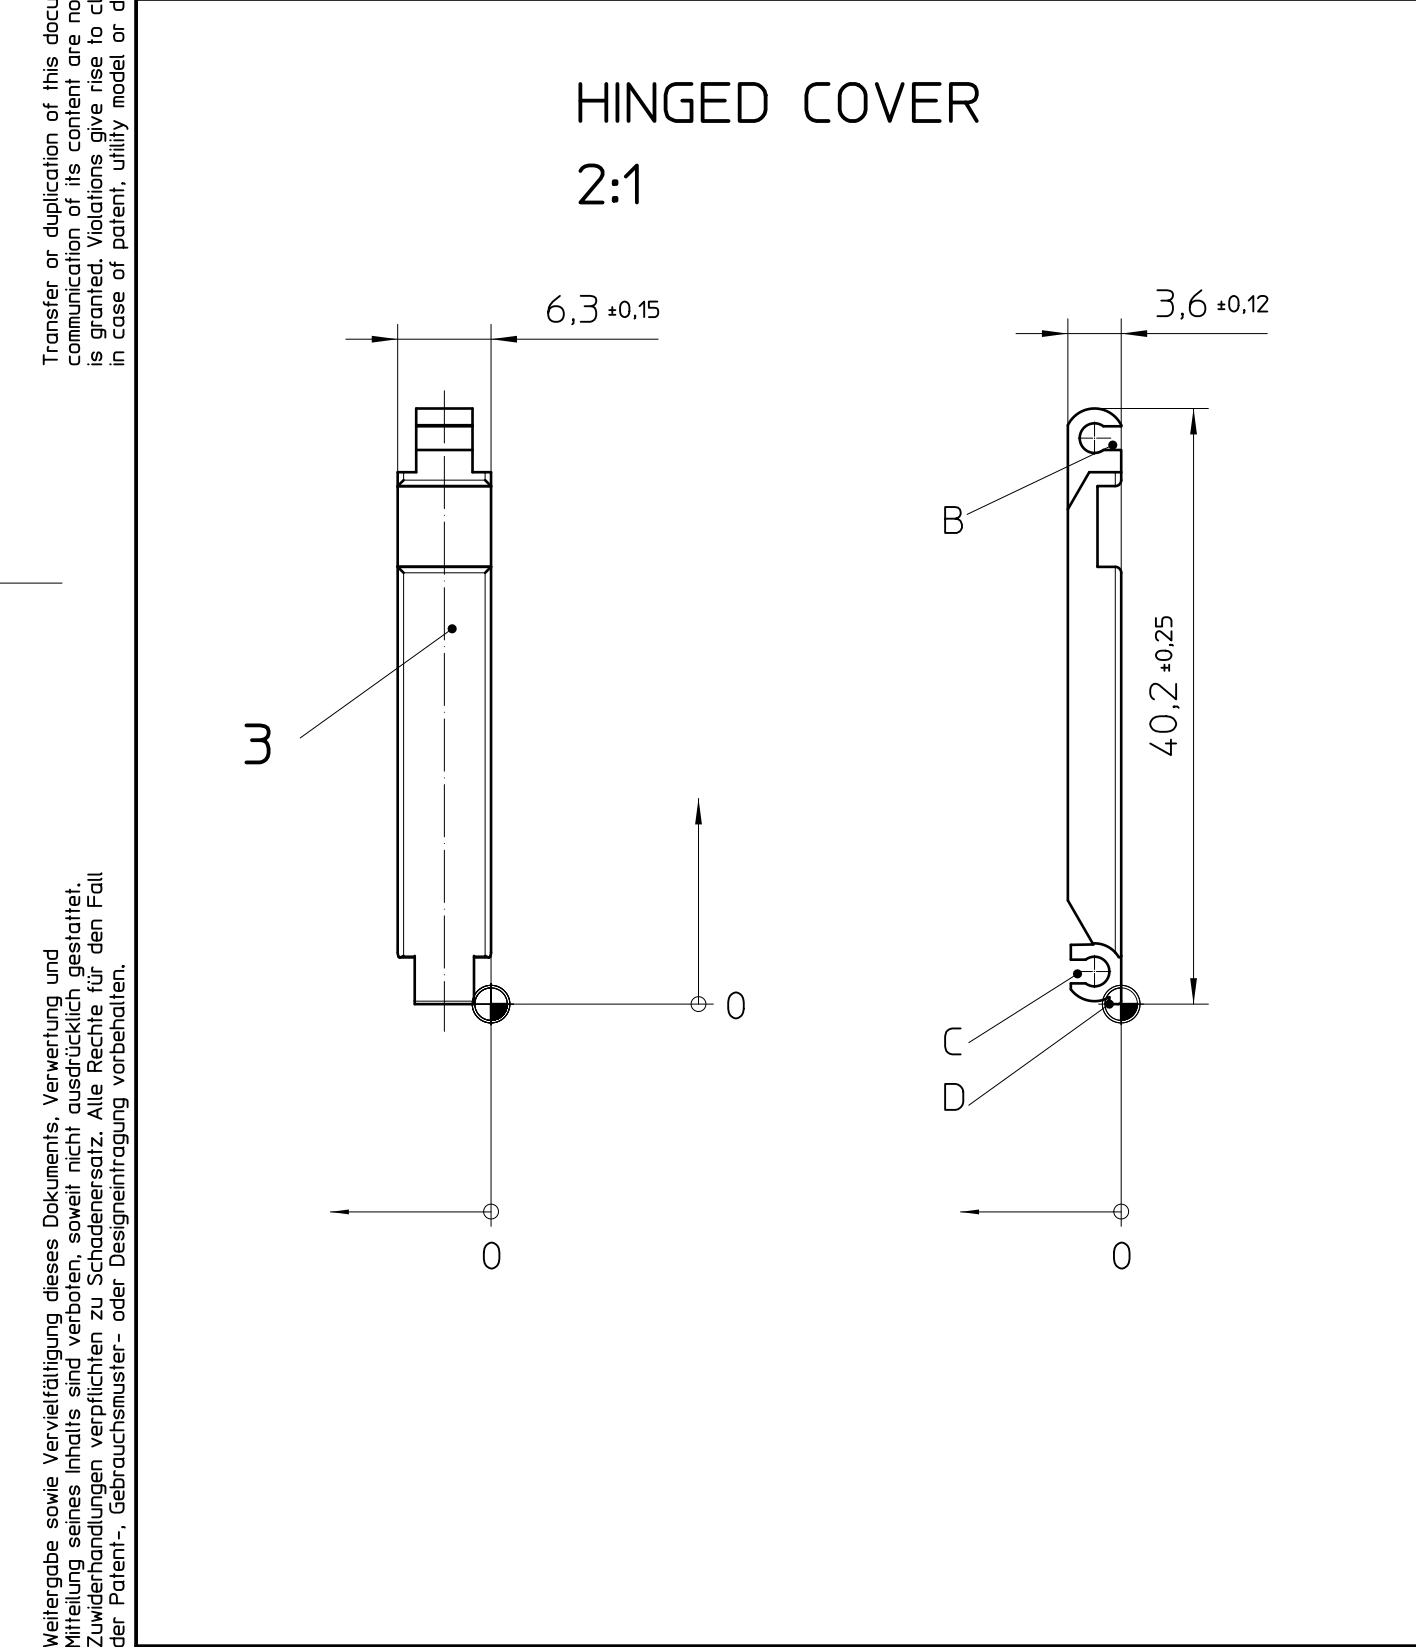
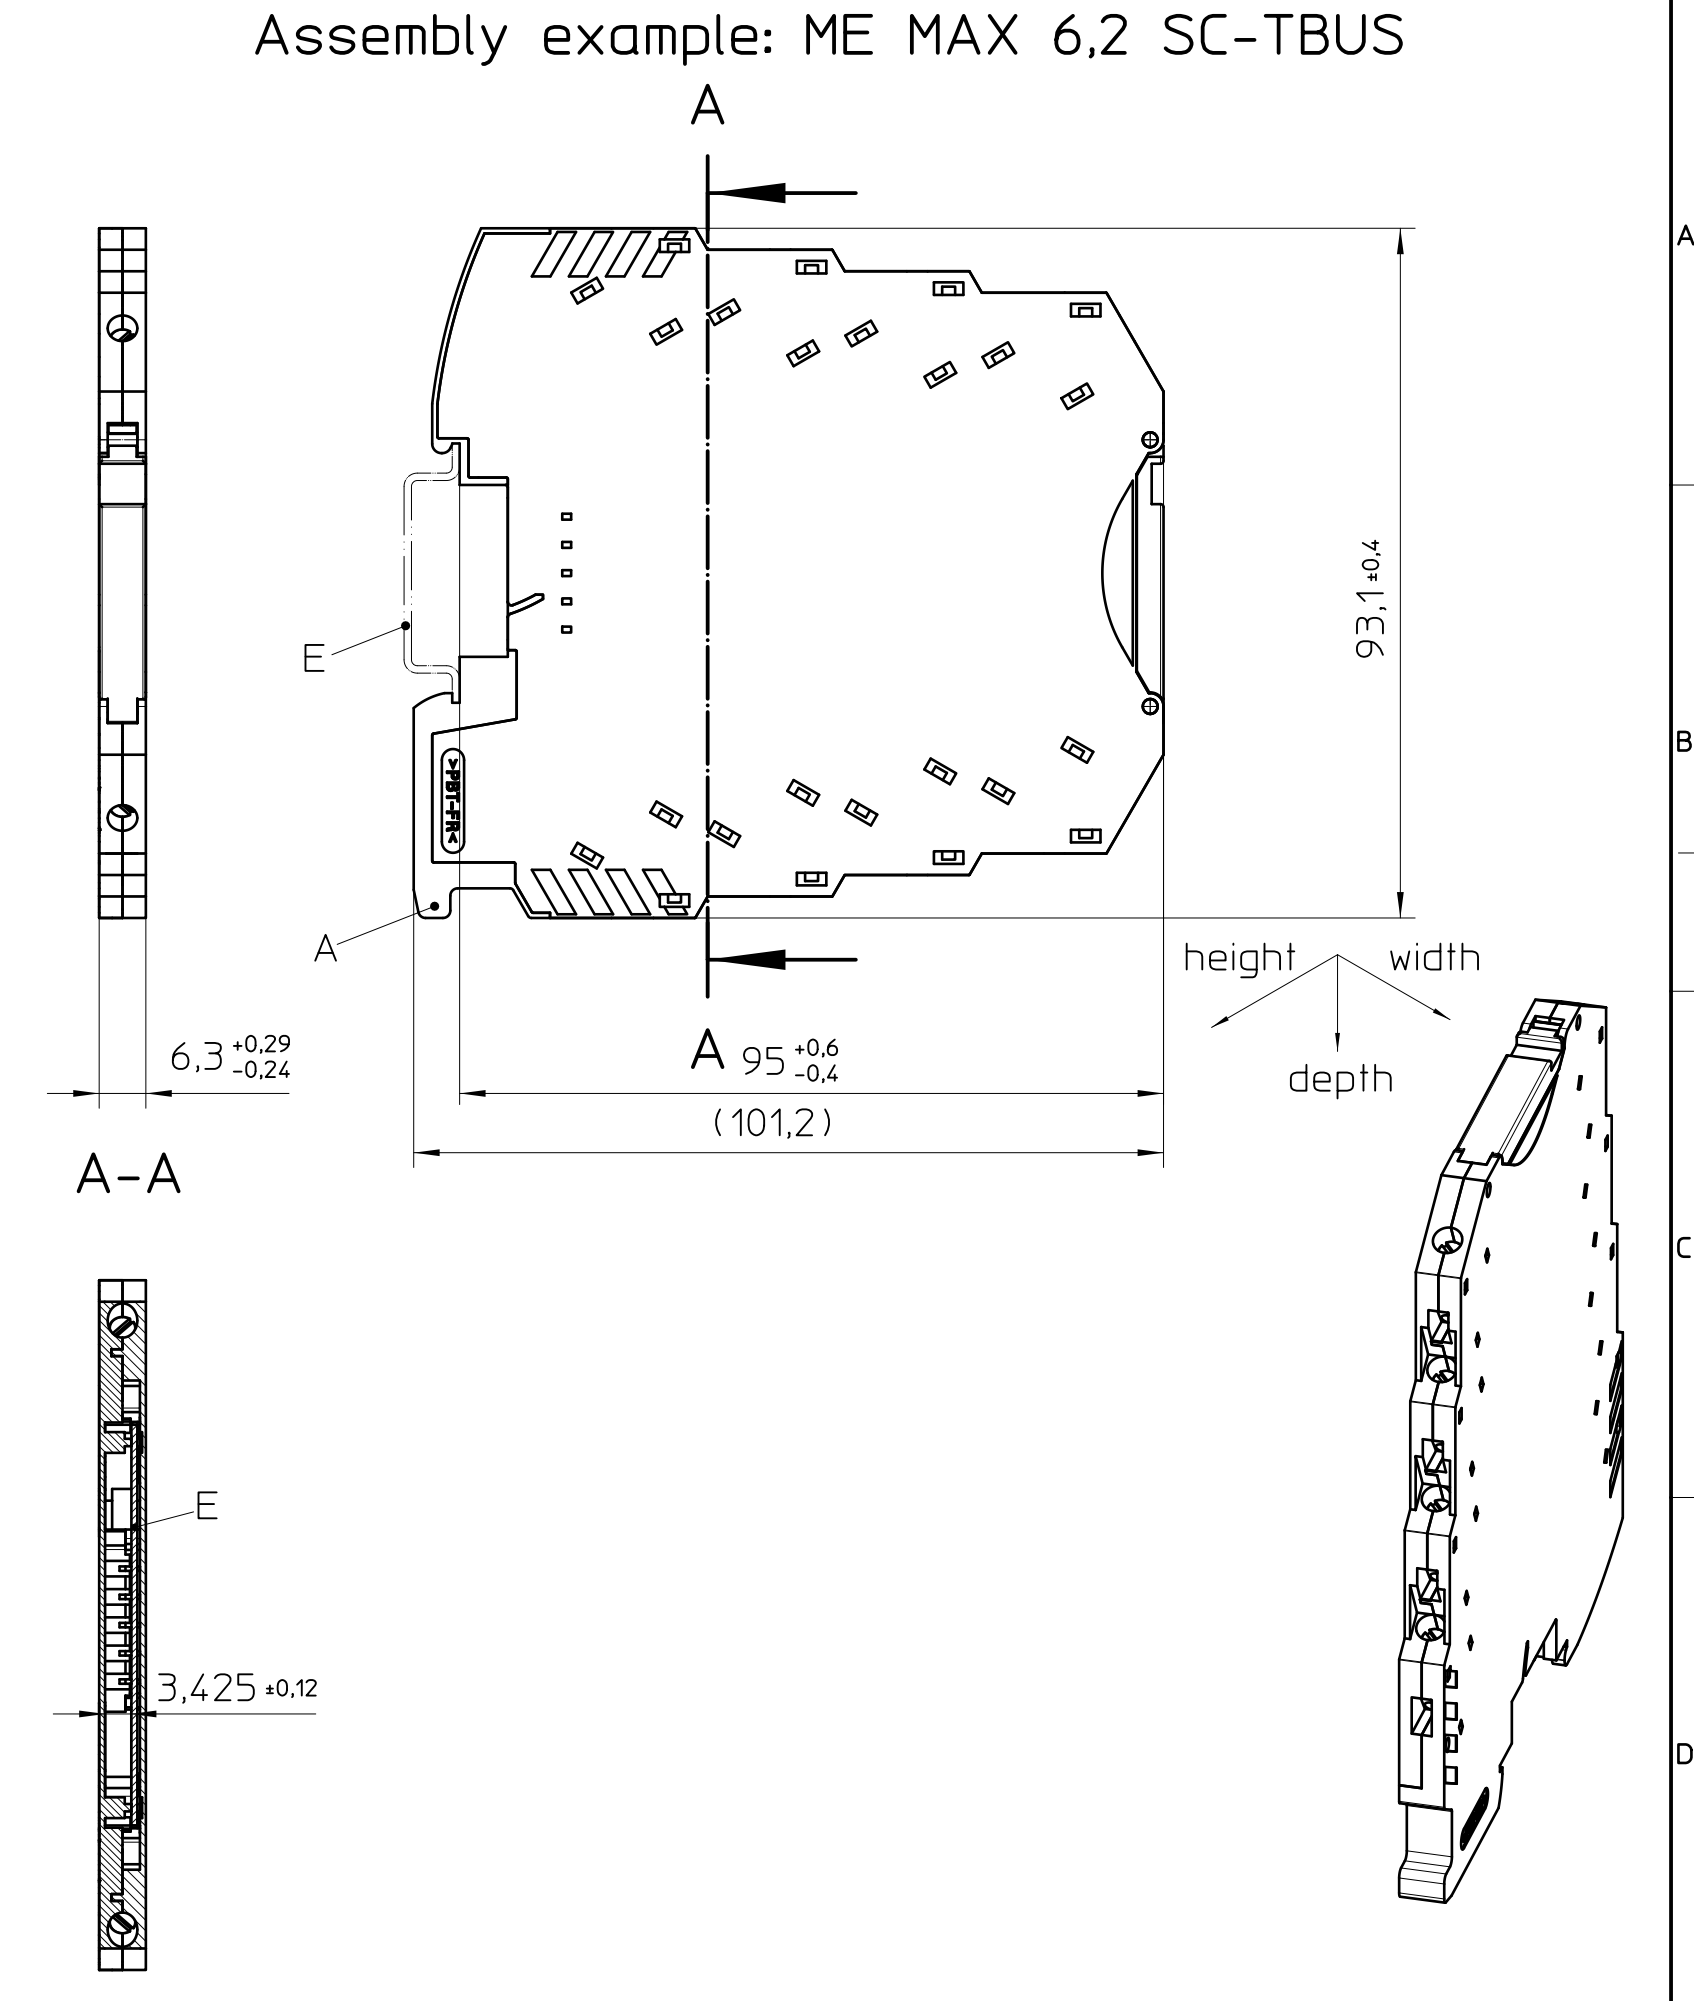
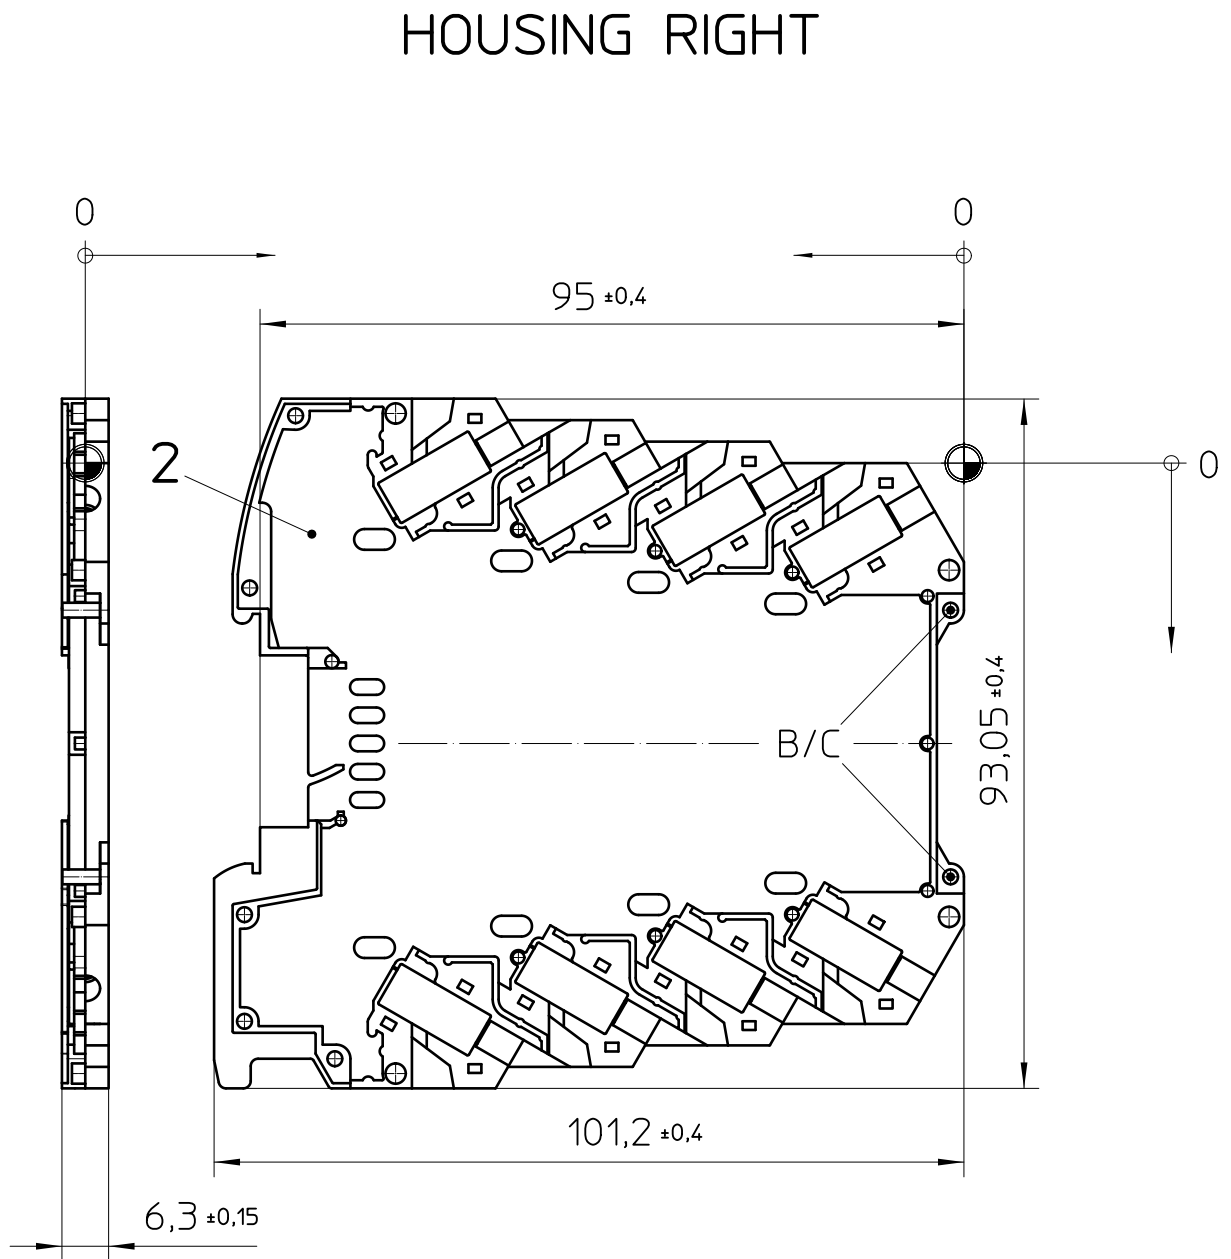


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

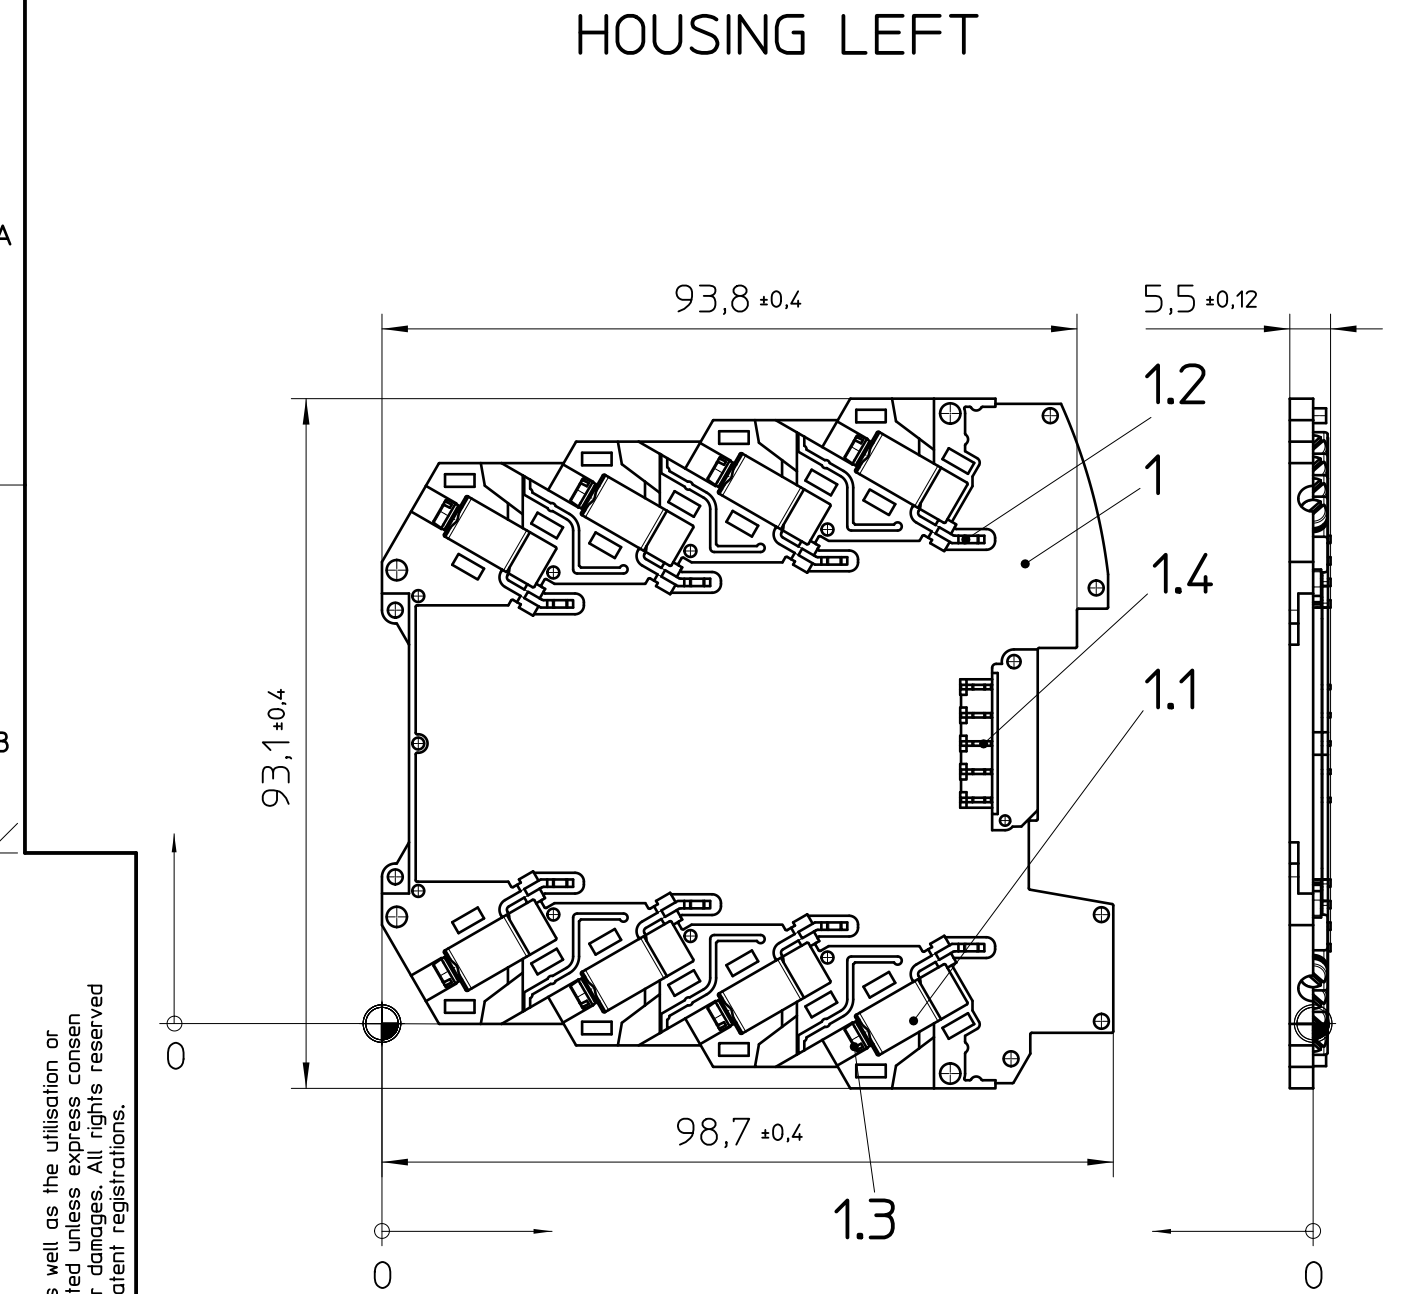

General Information:

- Simplified representation
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Workpiece zero point for mechanical processing
- Tolerances for mechanical processing are DIN ISO 2768-mK
- Tolerances for printing DIN ISO 2768-m
- Machining radii min. R1, further on request
- Web: www.phoenixcontact.com webcode: #0306

Additional Information:

- A. Elastic plastic lock
- B. Pivot bearing HINGED COVER
- C. Locking HINGED COVER
- D. Notch for locking release, by screw driver
- E. Mounting rail like EN 60715: TH 35-7,5 or mounting rail TH 35-15x1,5 similar to EN 60715

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	HOUSING LEFT	PBT
1.1	8	TERMINAL SLEEVE	Cu alloy, Ni plated
1.2	8	TERMINAL METAL	Cu alloy, Sn plated
1.3	8	SCREW	Cu alloy, Sn plated
1.4	5	TBUS-PIN	Cu alloy, Au plated
2	1	HOUSING RIGHT	PBT
3	1	HINGED COVER	PC

	DIN A2	document-No. / RI 00866926 / 03	date 05.11.2025	scale 1:1
		ident.-No. 2869634	document-type TECDOC 2D_Productdrawing	
	page 1	of 1	description ME MAX 6,2 SC-TBUS 4-4 KMGY	