




HOUSING LEFT

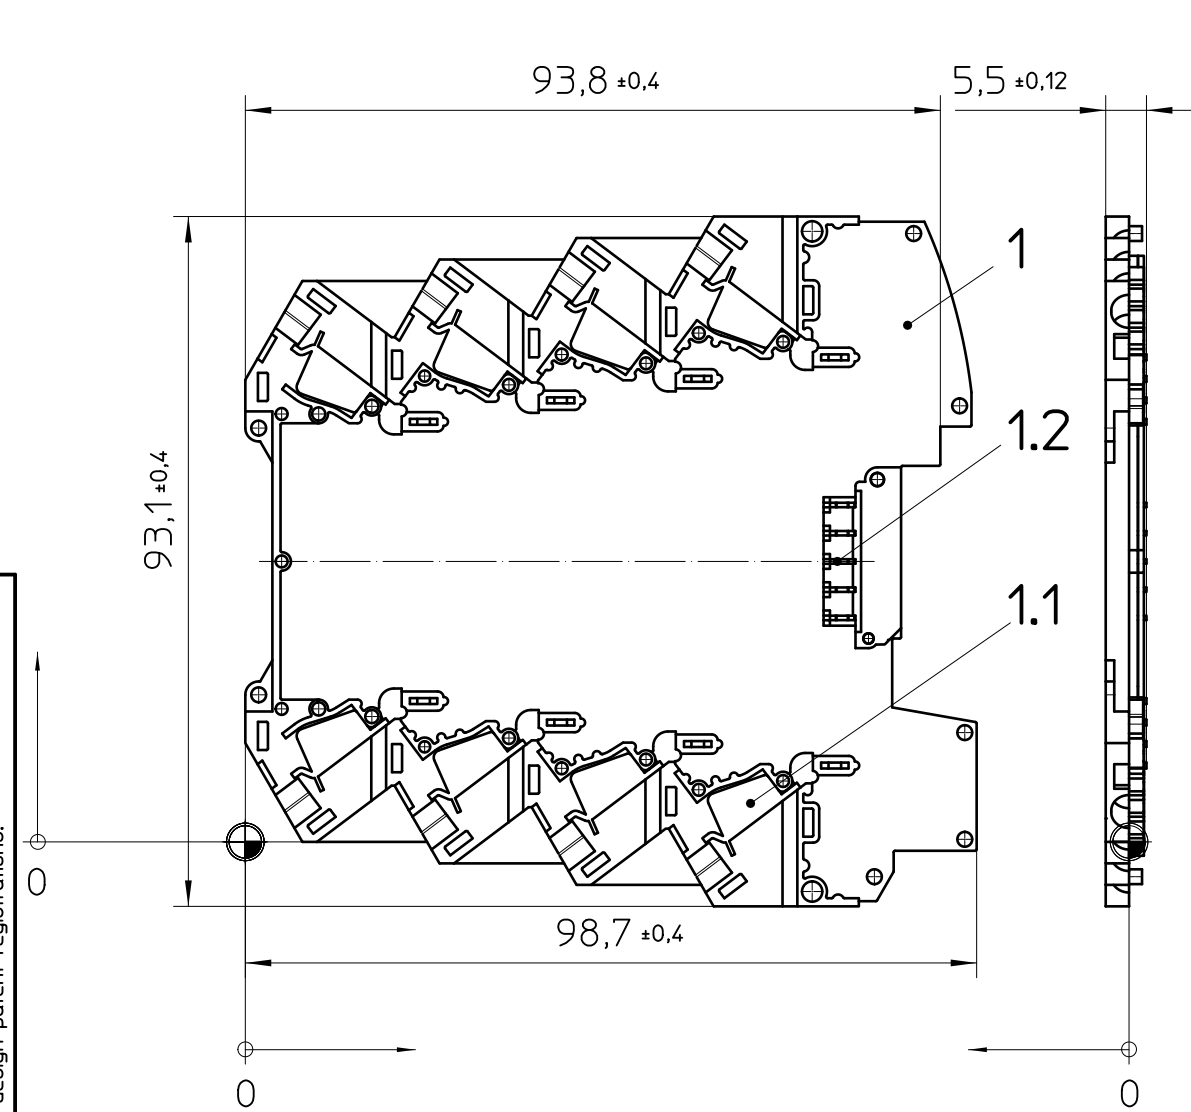


HOUSING RIGHT

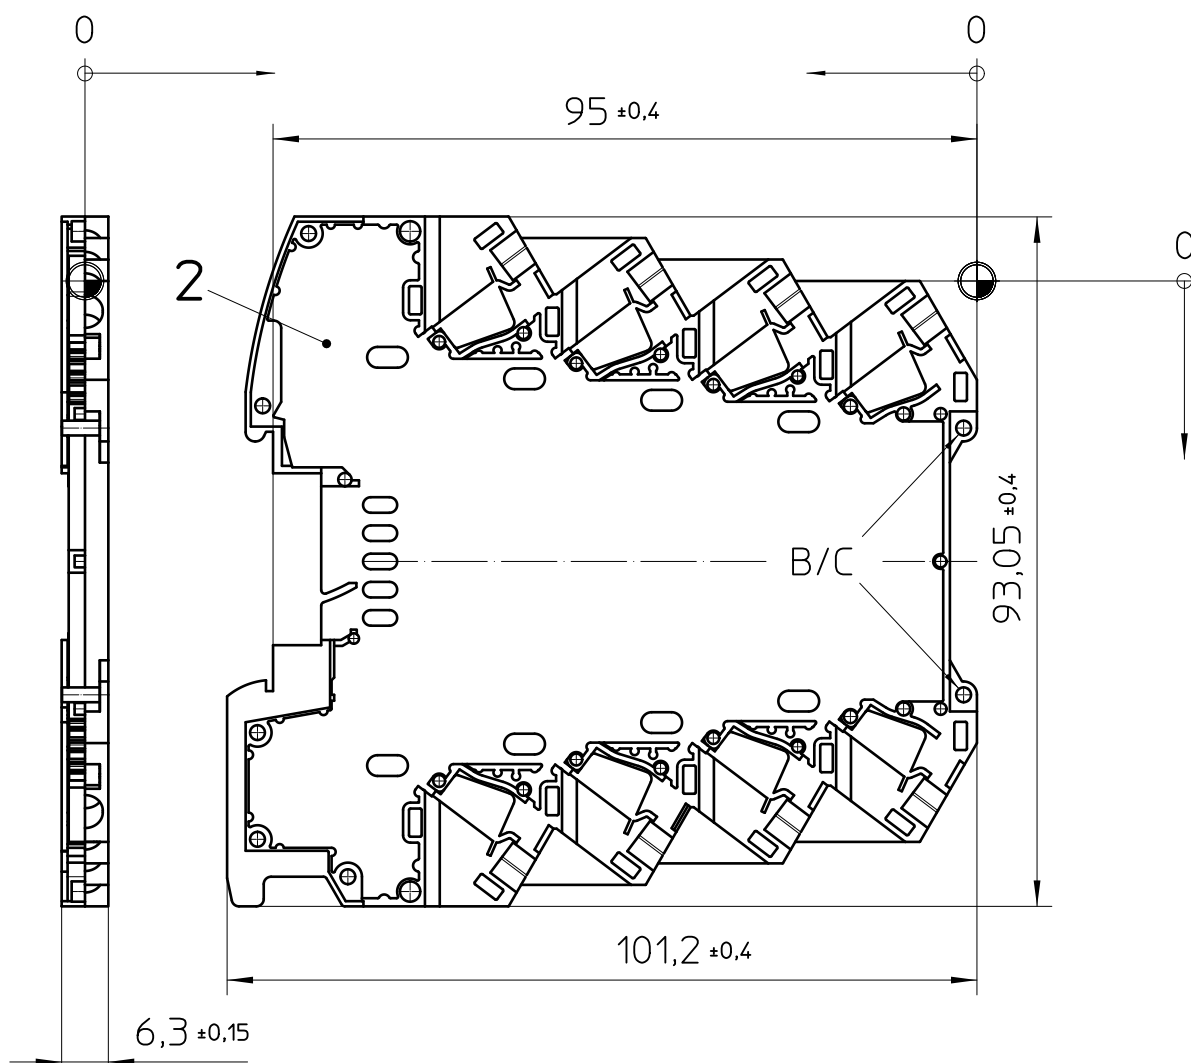

Assembly example: ME MAX 6,2 SP-TBUS

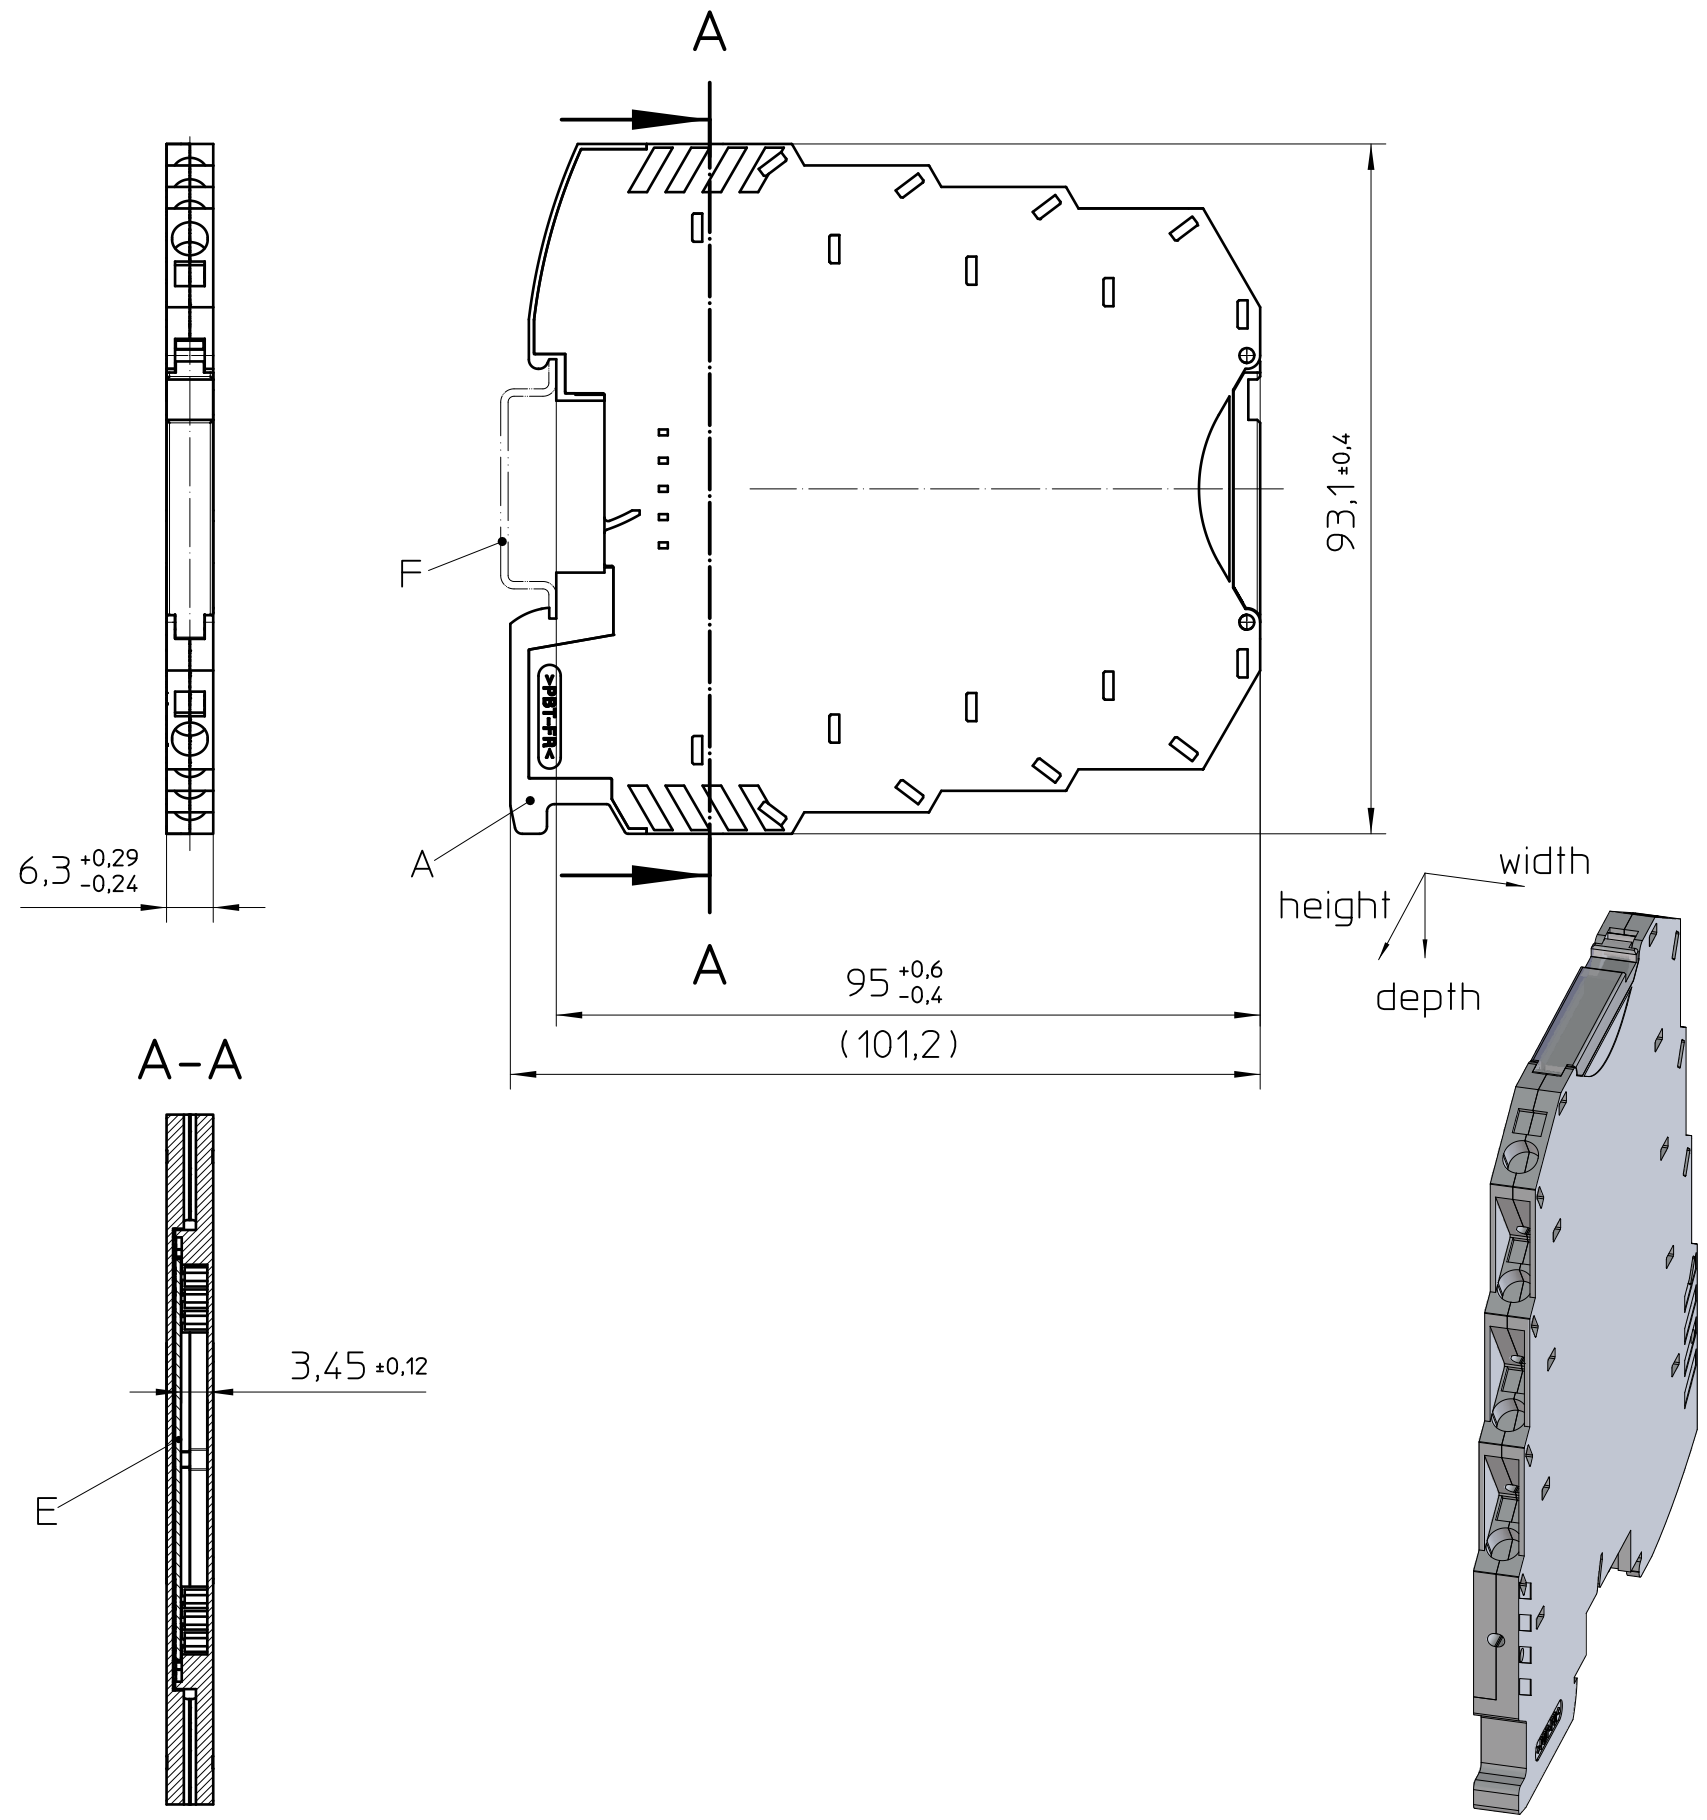

HINGED COVER
2:1

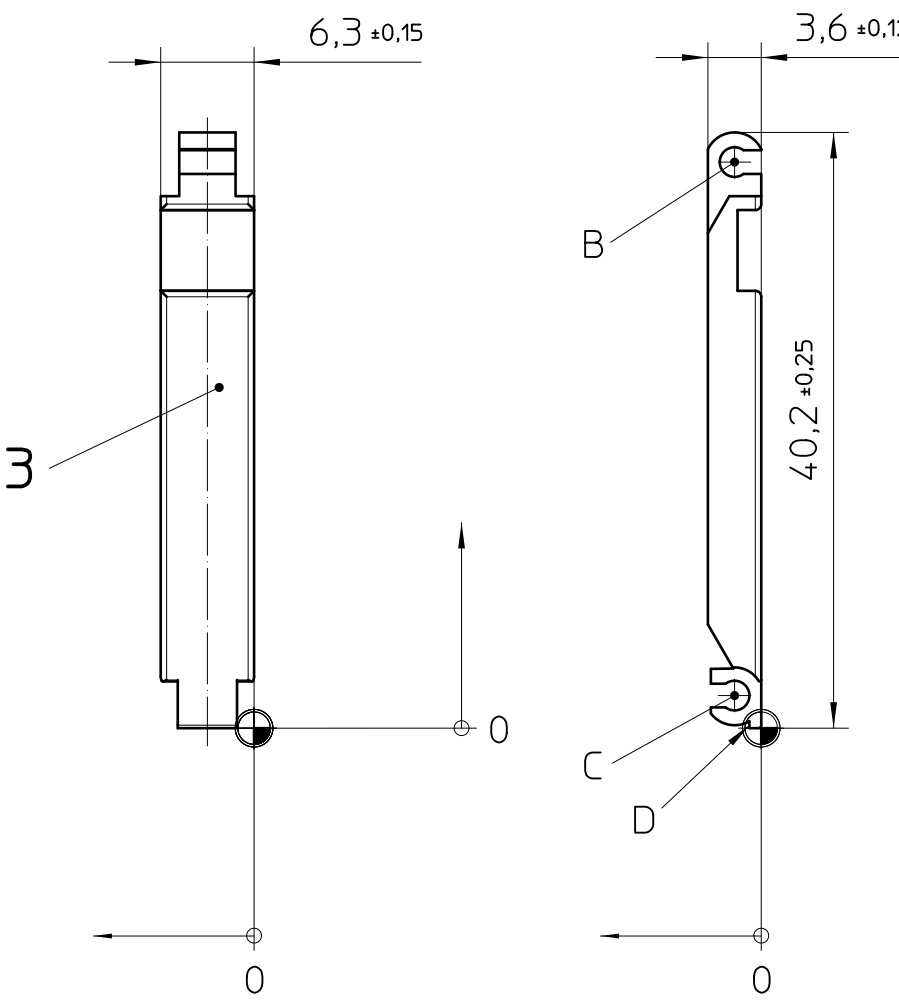

- General Information:
- Simplified representation, exemplary shown in gray.
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing are ISO 2768-mk
 - Tolerances for printing DIN ISO 2768-m
 - Machining radii min. R1, further on request
 - Web: www.phoenixcontact.com webcode: #0903

- Additional Information:
- A) Elastic plastic lock
 - B) Pivot bearing HINGED COVER
 - C) Locking HINGED COVER
 - D) Notch for locking release, by screw driver
 - E) Recommended PCB outline on www.phoenixcontact.com webcode: #0512
 - F) Mounting rail like EN 60715, TH 35-7,5 or mounting rail similar to EN 60715, TH 35-15x1,5

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	HOUSING LEFT	PBT
1.1	8	SPRING CONTACT	Cu, Sn plated + STL
1.2	5	TBUS-PIN	Cu alloy, Au plated
2	1	HOUSING RIGHT	PBT
3	1	HINGED COVER	PC

 DIN A2		document-No. / RI 00871576 / 03	date 05.11.2025	scale 1:1
		ident.-No. 2890234	document-type TECDOC 2D_Productdrawing	
page 1 of 1		description ME MAX 6,2 SP-TBUS 4-4 BK		