

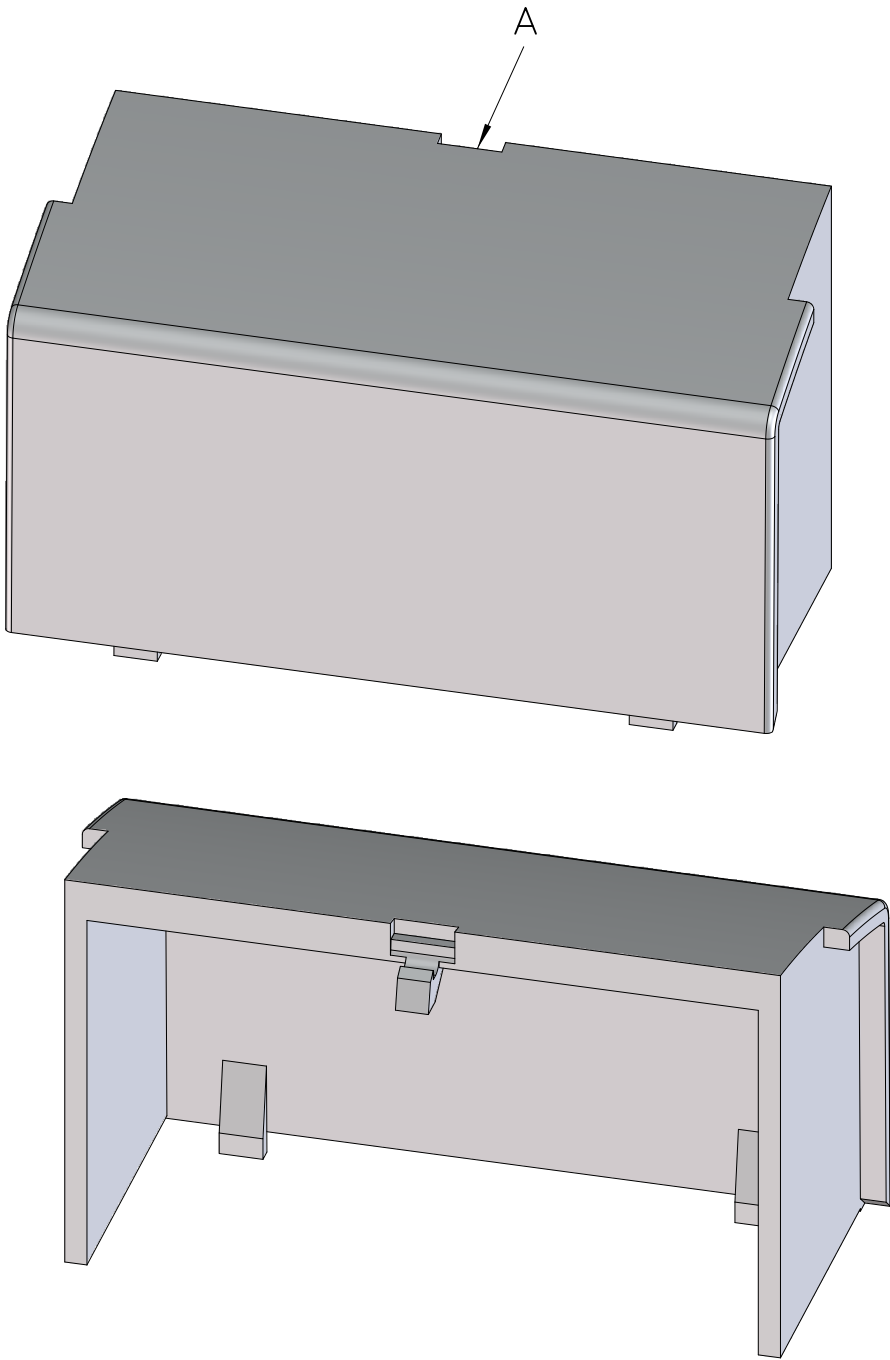



FILLER PLUG

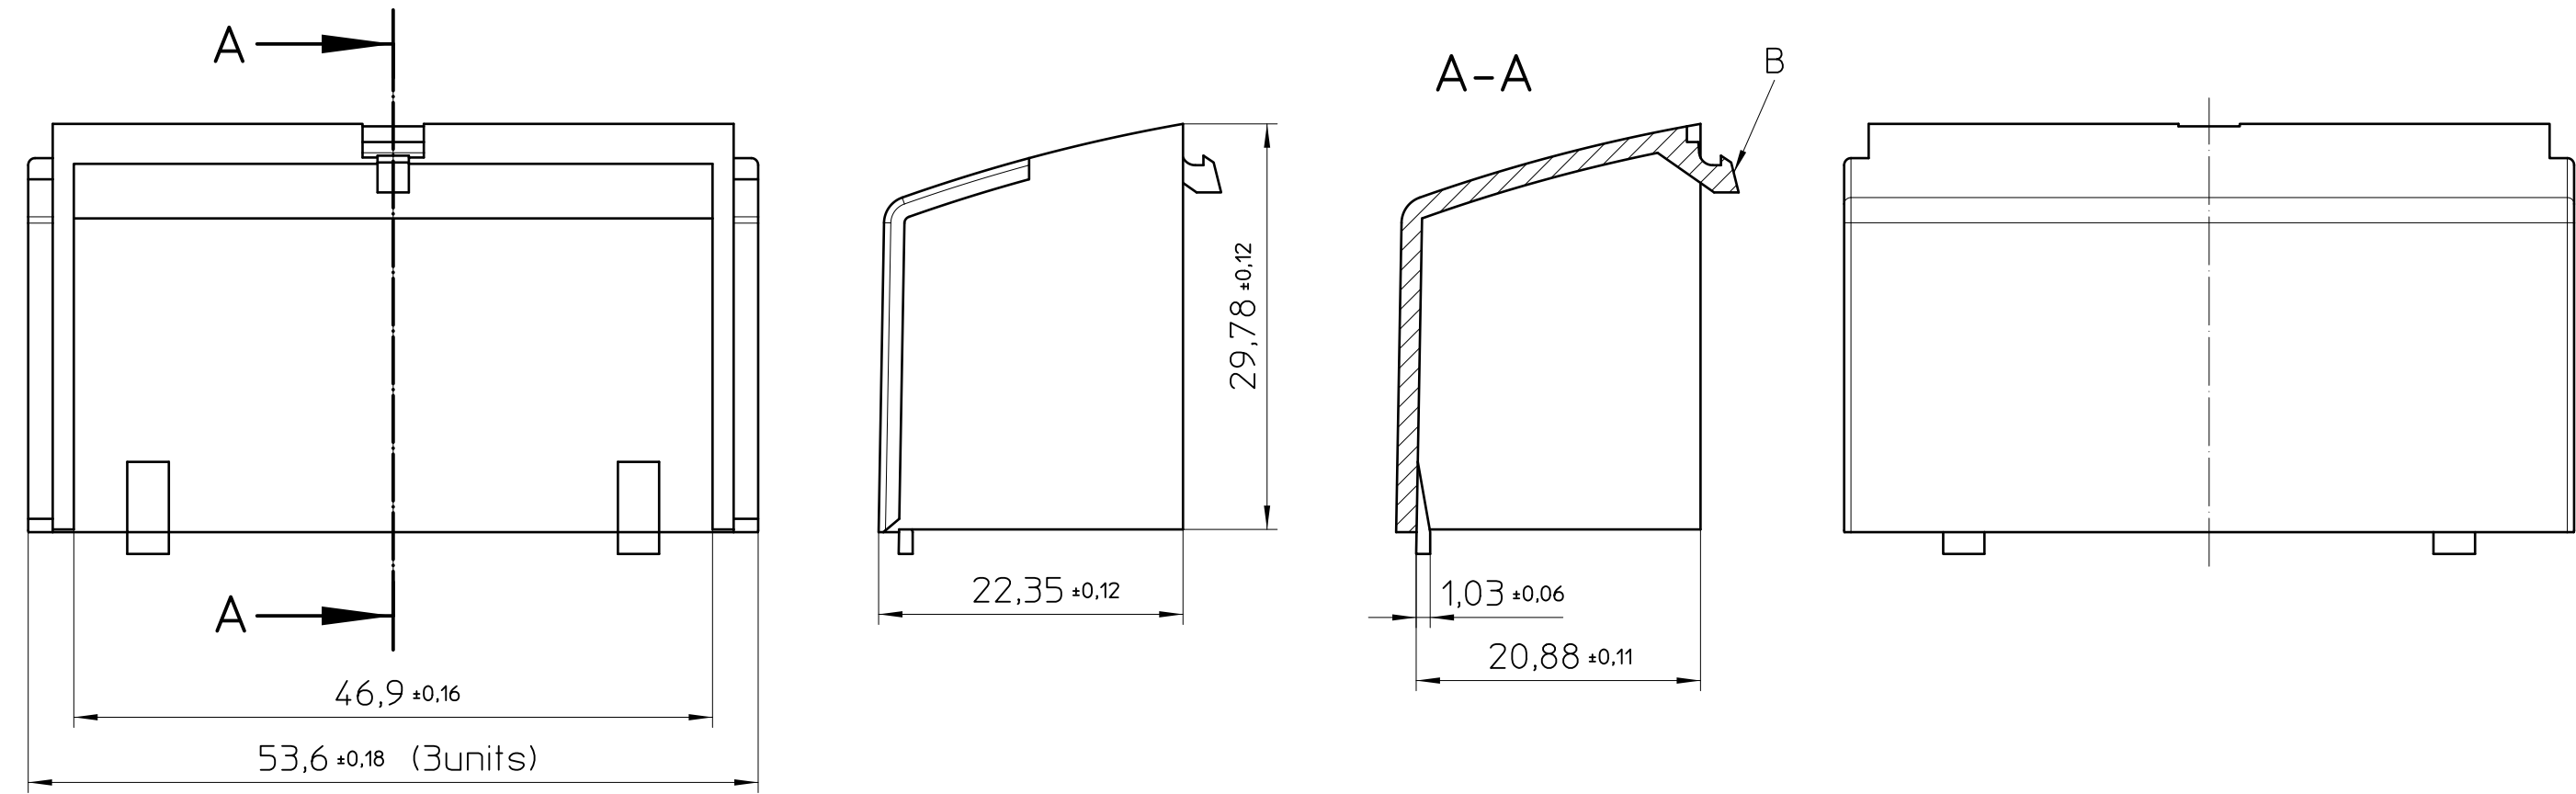

recommended PCB layout
view: component side

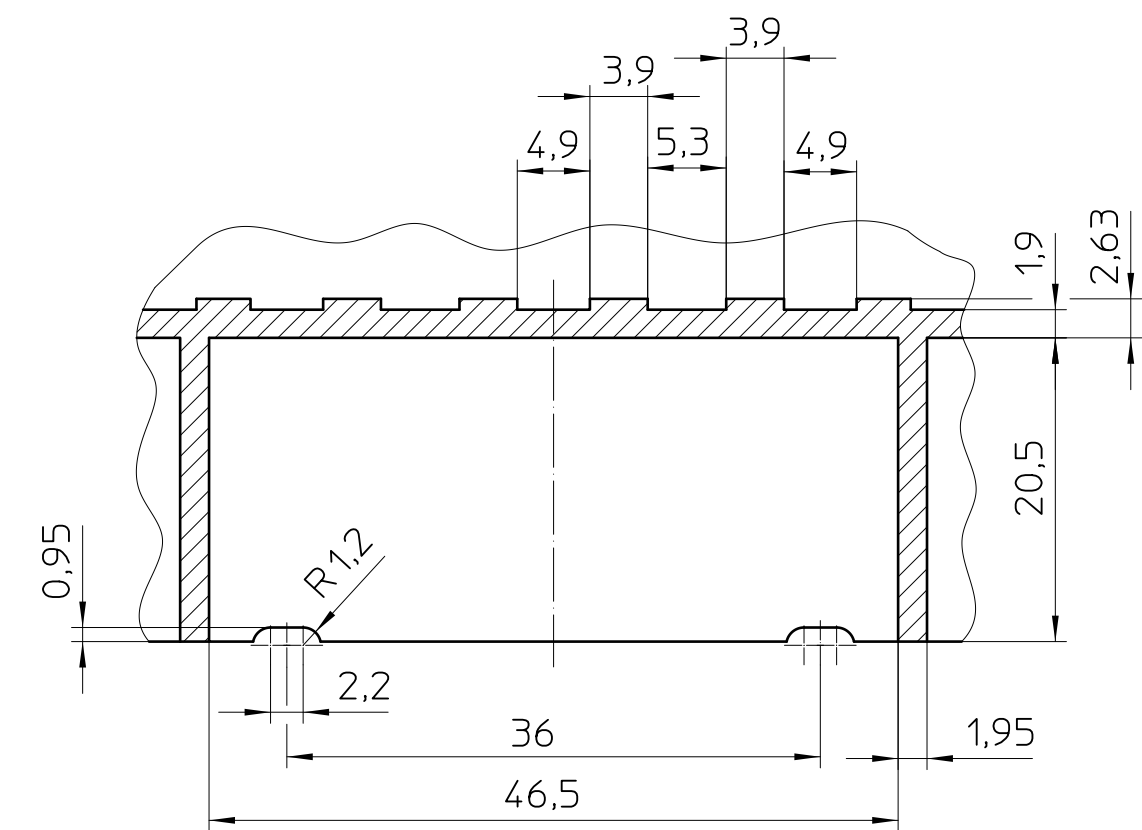

General tolerances:
dimensions ≤ 30: ±0,1/R±0,2/±1°
dimensions > 30: ±0,15/R±0,2/±1°
symmetry: 0,2

- General Information:
- Simplified representation, exemplary shown in gray.
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
 - Restricted area 
 - Web: www.phoenixcontact.com webcode: #0311

- Additional information:
- A. Notch to disassembly filler plug by screwdriver
- B. Snap-fit
- Assembly in BC upper part width:
53,6/U22, 107,6/U22, 161,6/U22.

Pos.	QTY	Description	Material
1	1	FILLER PLUG	PC
 DIN A2		document-No. / RI 00917439 / 02	date 23.04.2025
		ident.-No. 2896238	document-type TECDOC 2D_Productdrawing
page 1	of 1	description BC 53,6 BS U22 KMGY	
		scale 2:1	